

# Fans and gear motors for solid fuel heating systems

Quiet and reliable output in compact design  
version 2014-05

**ebmpapst**

The engineer's choice



## Specialists and special solutions for state-of-the-art heating engineering

Traditionally, heating engineering has been focus of the ebm-papst performance spectrum. For decades, our innovative motor and fan technology has contributed to making modern heating engineering more powerful, economical and environmentally friendly. Because we have been part of the ever-expanding solid fuel heater market for more than 15 years, we can not only rely on special fans for wood pellet heaters and wood chip ovens, but can also integrate exceptional application skills and knowledge.

With fan technology specially developed for the requirements of wood pellet heaters and wood chip ovens, our goal is to provide the required air flow for all systems – whether their heating capacity is 5 kW or 200 kW, and for every conceivable operating state – and to do so quietly and economically. Even today, we offer a range of fan products tailored to the widely varying oven sizes in tried-and-tested AC & EC technology: fans for both intake and exhaust air.

We gladly take advantage of opportunities to integrate our application skills and knowledge, as well as our experience in high-temperature applications, into the development of new devices and systems at an early stage. One of the ways we help is to make our measurement laboratory available to our customers so that they can optimize specific application designs in the ovens. This guarantees the best possible fulfillment of the stringent requirements for temperature stability and noise with fan technology that is perfectly suited to the application.


### **High performance in a small space**

The tight space of the ovens is another challenge we constantly strive to master. Every application should embody the ideal combination of size, output and cost-effectiveness. Our highly compact fan motors, with their external rotor design, offer the best possible conditions. The design differs from that of conventional electric motors – the stator is inside, the rotor outside. Thus the external rotor-motor and the fan form a unit that is not only compact and space-saving, but also durable and robust.



# Table of contents

Specialists and special solutions for state-of-the-art heating engineering	2	Scroll dimensions	92
GreenTech: The Green Company	4	Additional shaft seal	94
The entire product range from a single source	6	Electrical connections	94
EC/AC centrifugal blowers (intake air)	9	Technical parameters & scope	100
EC/AC centrifugal blowers (ambient air)	26	ebm-papst representatives & subsidiaries	104
EC/AC tangential blowers (ambient air)	32		
EC/AC centrifugal fans (exhaust air)	37		
EC/AC centrifugal blowers (exhaust air)	71		
Gear motors	83		

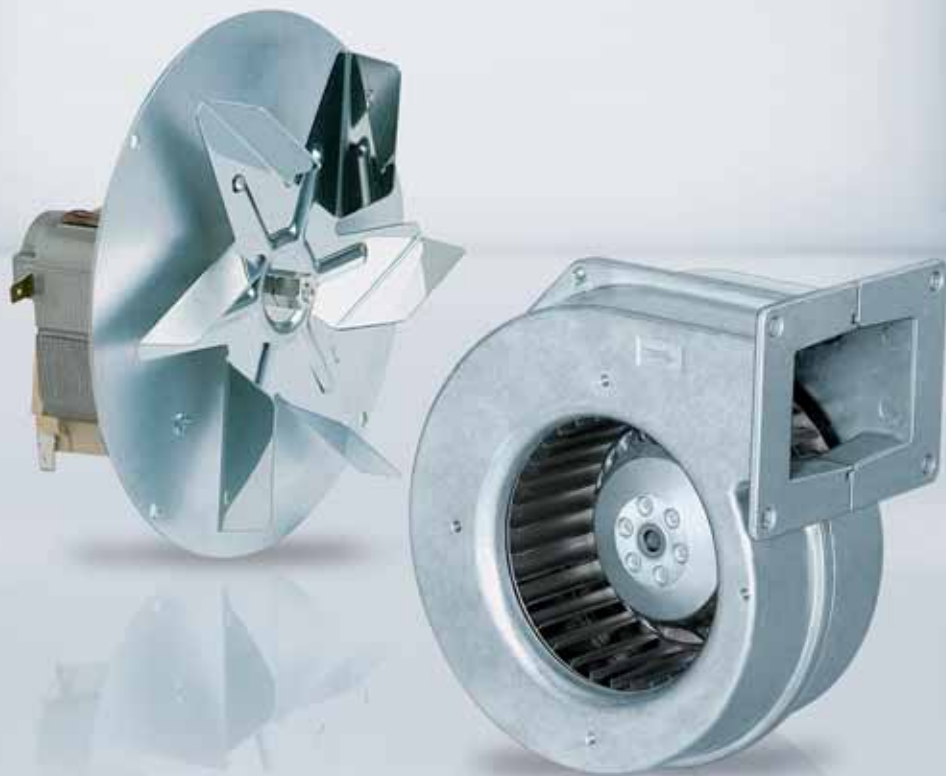

# Sustainability is at the centre of our thoughts and actions. Out of conviction!

Eco-friendliness and sustainability have always been at the core of our thoughts and actions. For decades, we have worked according to the simple but strict creed of our co-founder Gerhard Sturm: "Each new product we develop has to be better than the last one in terms of economy and ecology." GreenTech is the ultimate expression of our corporate philosophy.

## **GreenTech is pro-active development.**

Even in the design phase, the materials and processes we use are optimised for the greatest possible eco-friendliness, energy balance and – wherever possible – recyclability. We continually improve the material and performance of our products, as well as the flow and noise characteristics. At the same time, we significantly reduce energy consumption. Close co-operation with universities and scientific institutes and the professorship we endow in the area of power engineering and regenerative energies allows us to profit from the latest research findings in these fields – and at the same time ensure highly qualified young academics.

## **GreenTech is eco-friendly production.**

GreenTech also stands for maximum energy efficiency in our production processes. There, the intelligent use of industrial waste heat and groundwater cooling, photovoltaics and, of course, our own cooling and ventilation technology are of the utmost importance. Our most modern plant, for instance, consumes 91% less energy than currently specified and required. In this way, our products contribute to protecting the environment, from their origin to their recyclable packaging.





**GreenTech is acknowledged and certified.**

Every step in our chain of production meets the stringent standards of environmental specialists and the public.

This supports our position as Germany's most sustainable company 2013, as does the DEKRA Award 2012 we received in the category "Umwelt – Herausforderung Energiewende / Environment – Challenge: Transition to more sustainable energy systems", to name only a few of a large number of examples. The environmental advantage gained in the performance of the products developed from our GreenTech philosophy can also be measured in the fulfillment of the most stringent energy and environmental standards. In many instances, our products are already well below the thresholds energy legislation will impose a few years from now – several times over.

**Our customers profit from this every day.**

The heart of GreenTech is future-oriented EC technology from ebmpapst. The EC technology at the core of our most efficient motors and fans allows efficiency of up to 90%, saves energy at a very high level, significantly extends service life and makes our products maintenance-free. These values pay off not only for the environment, but every cent also pays off for the user! All ebmpapst products – even those for which GreenTech EC technology does not (yet) make sense from an application viewpoint – feature the greatest possible connection of economy and ecology.



GreenTech means  
ecologically improving  
every new product.

# The entire product range from a single source

## Fans for intake air

Used as primary or secondary intake air fans, ebm-papst AC & EC centrifugal blowers shine with their quiet and economical performance. The blowers can be equipped with an optional tach output for exact control according to the operating mode.

Of course, ebm-papst products always designed for an uncompromising level of stability and durability. For example, the scroll housing of the ebm-papst centrifugal blower is made of robust die-cast aluminium, and the impeller is made of hot-galvanized sheet steel.

## Fans for ambient air

Fans for air circulation are sometimes employed in pellet stoves to ensure uniform distribution of the heated air throughout the room. Use is made of tangential blowers or forward-curved blowers for this purpose.

## Fans for exhaust air

Exhaust air is carried away by ebm-papst induced draft blowers: single inlet AC centrifugal fans. With our extensive experience in high-temperature bearing technology and the aerodynamic skills and knowledge gained from being the market leader, we can meet the most stringent demands of this application area for service life, noise and cost-effectiveness.

The type of construction itself guarantees exceptional cooling performance – which is improved even further by the flow-optimized cooling blades that provide additional motor cooling. The impellers of our centrifugal fans are made of corrosion-resistant stainless steel.


## Gear motors

A worm conveyor moves the pellets into the combustion chamber of the stove. Precise metering of the pellets is crucial to obtain the required heat output. This is achieved by using special gear motors from ebm-papst.



Solid fuel heater manufacturers can count on ebm-papst for complete solutions from a single source. Our product range for wood pellet heaters and wood chip ovens includes intake air fans and customized exhaust air fans for exhaust gas discharge.

Example for a central heating unit:

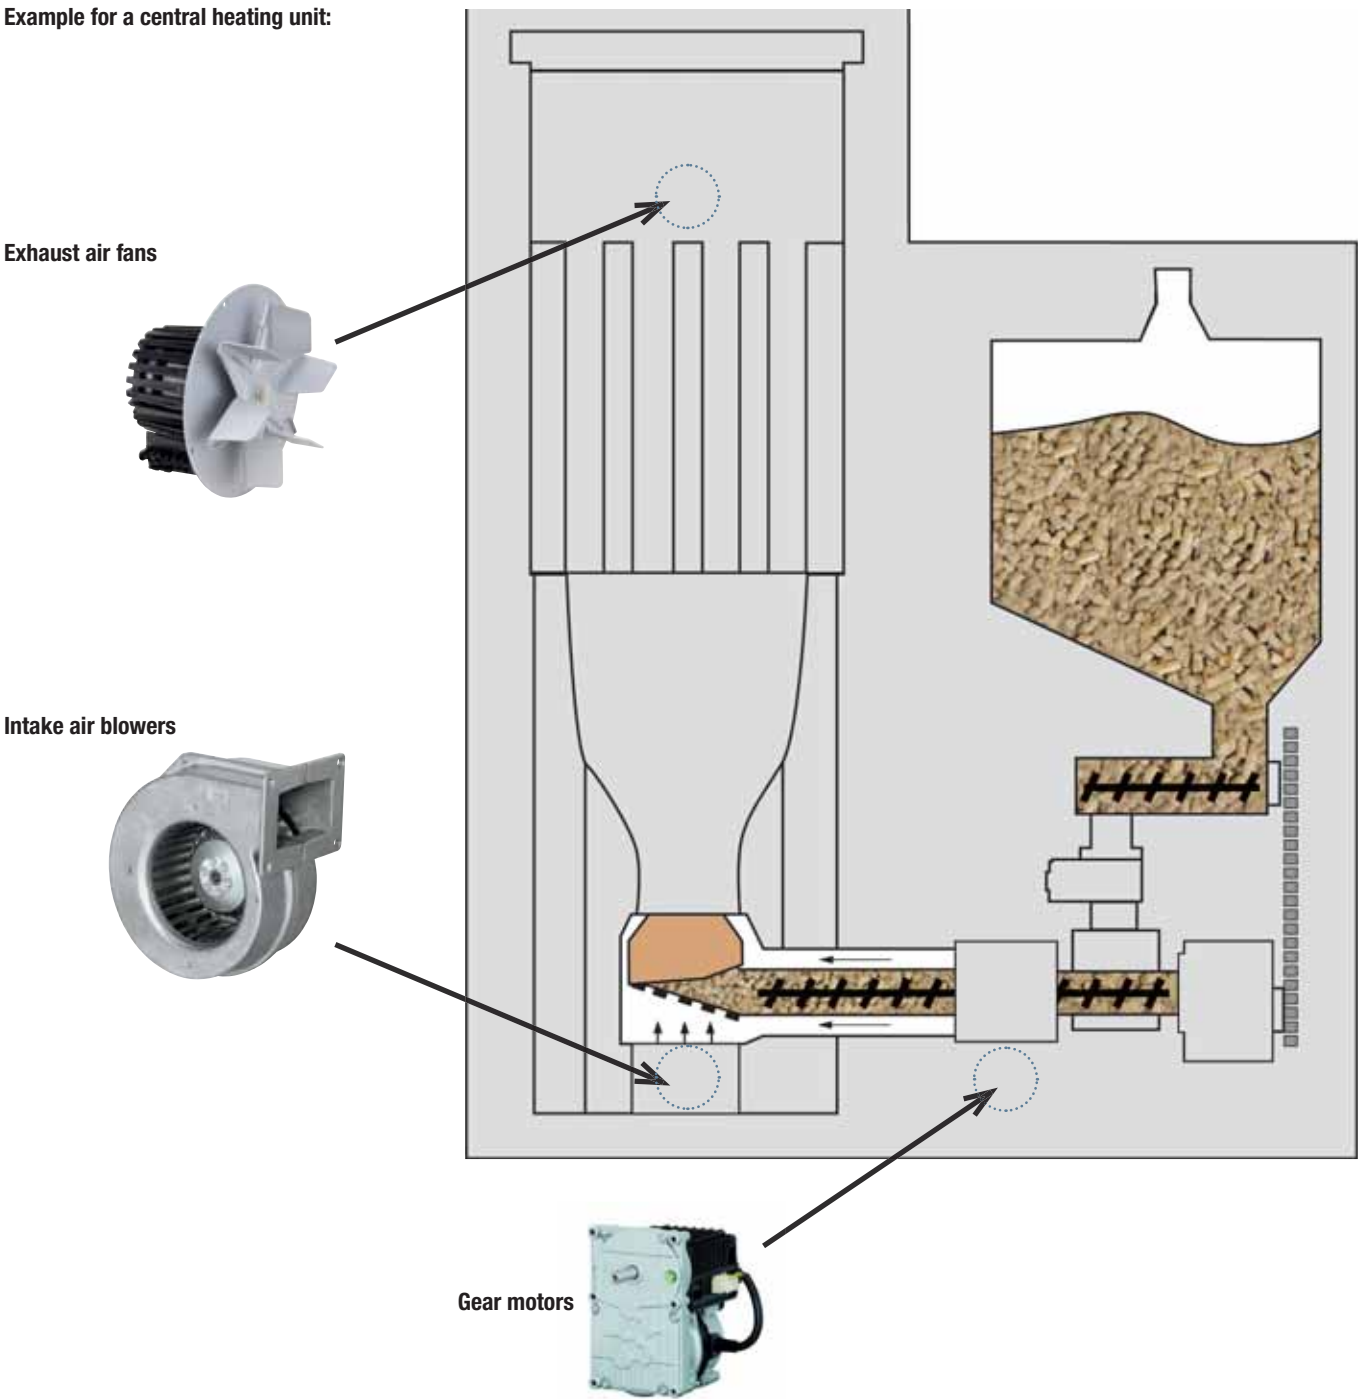



## EC/AC centrifugal blowers (intake air)





# EC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 108




- **Material:** Housing: Die-cast aluminium  
Impeller: Hot-dip galvanised sheet steel  
Rotor: Galvanised  
Electronics enclosure: Die-cast aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	Pa	°C	kg	p. 95	
G3G 108-BB01 -02	M3G 055-BD	Ⓐ 1~230	50/60	244	2800	50	0,38	64	0	-25..+60	1,7	H1)	

subject to alterations (1) Nominal data in operating point with maximum load and 230 VAC


**Curves:**

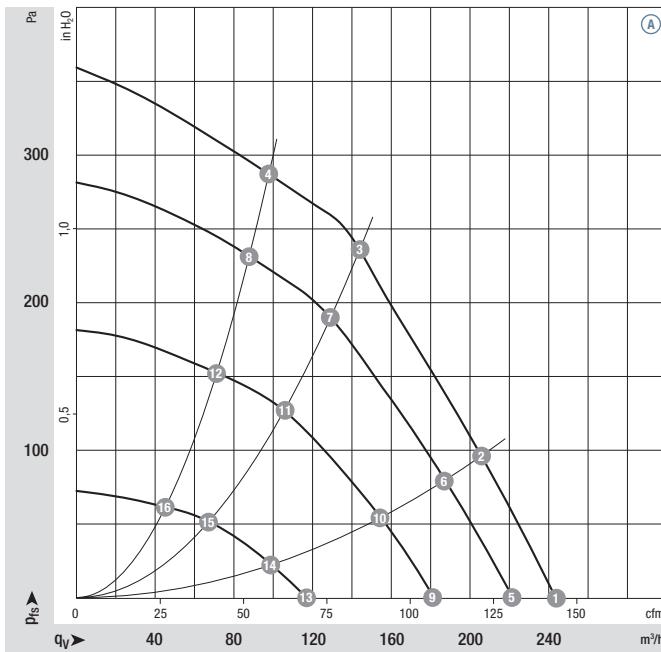

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2800	50	0,38	64
Ⓐ 2	2950	44	0,35	62
Ⓐ 3	3120	33	0,25	60
Ⓐ 4	3260	25	0,20	59
Ⓐ 5	2570	38	0,30	61
Ⓐ 6	2660	34	0,25	60
Ⓐ 7	2820	25	0,20	57
Ⓐ 8	2920	19	0,15	55
Ⓐ 9	2150	23	0,20	56
Ⓐ 10	2200	20	0,15	55
Ⓐ 11	2320	16	0,15	52
Ⓐ 12	2390	12	0,10	50
Ⓐ 13	1400	9	0,10	46
Ⓐ 14	1425	8	0,10	44
Ⓐ 15	1490	7	0,10	40
Ⓐ 16	1530	6	0,10	40

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:**
  - Control input 0-10 VDC / PWM
  - Output 10 VDC max. 1,1 mA
  - Tach output
  - Locked-rotor protection
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-1  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC, GOST; VDE, UL, CSA are applied for

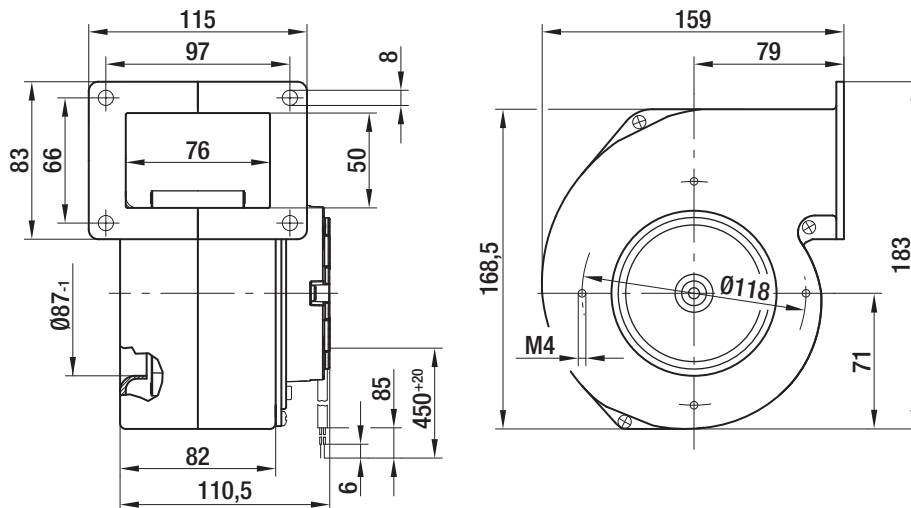

# EC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 120




- **Material:** Housing: Die-cast aluminium  
Impeller: Hot-dip galvanised sheet steel  
Rotor: Galvanised  
Electronics enclosure: Die-cast aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	Pa	°C	kg	p. 95	
G3G 120-BB03 -02	M3G 055-BD	Ⓐ 1~230	50/60	240	2200	41	0,30	61	0	-25..+60	1,8	H1)	

subject to alterations (1) Nominal data in operating point with maximum load and 230 VAC


**Curves:**

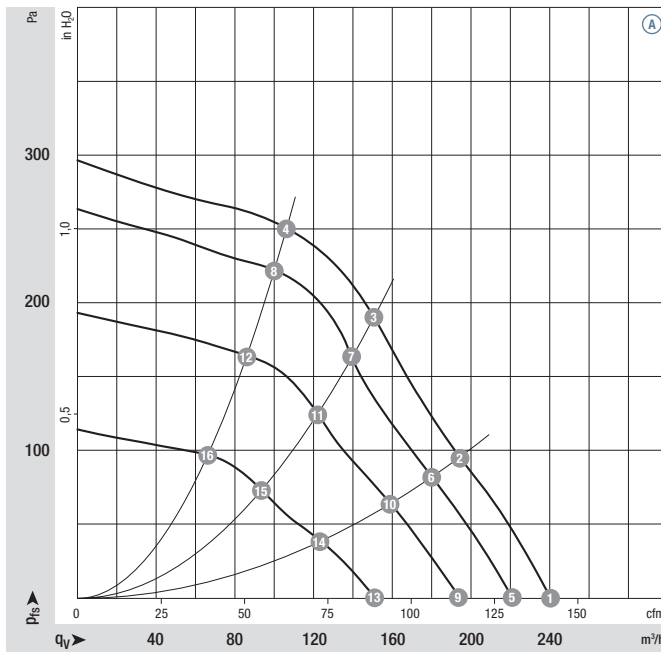

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2200	41	0,30	61
Ⓐ 2	2320	34	0,25	60
Ⓐ 3	2440	28	0,20	59
Ⓐ 4	2600	20	0,15	58
Ⓐ 5	2060	34	0,25	59
Ⓐ 6	2190	29	0,20	57
Ⓐ 7	2295	24	0,20	55
Ⓐ 8	2445	18	0,15	54
Ⓐ 9	1830	24	0,20	54
Ⓐ 10	1920	20	0,15	52
Ⓐ 11	2010	17	0,15	51
Ⓐ 12	2115	13	0,10	51
Ⓐ 13	1430	13	0,10	48
Ⓐ 14	1500	12	0,10	45
Ⓐ 15	1580	10	0,10	44
Ⓐ 16	1640	8	0,10	44

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:**
  - Control input 0-10 VDC / PWM
  - Output 10 VDC max. 1,1 mA
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-1  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** GOST; VDE, UL, CSA, CCC are applied for

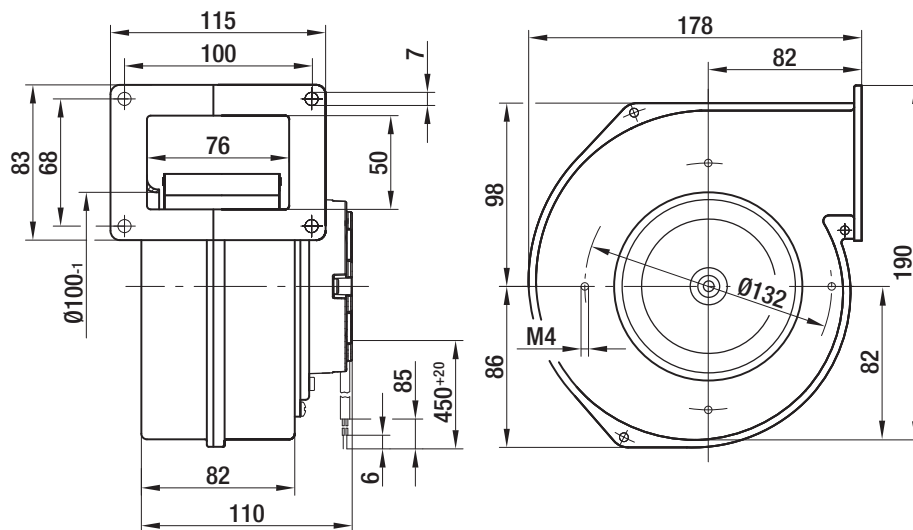

# EC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 140




- **Material:** Housing: Die-cast aluminium  
Impeller: Hot-dip galvanised sheet steel  
Rotor: Galvanised  
Electronics enclosure: Die-cast aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	Pa	°C	kg	p. 95	
G3G 140-AV03 -02	M3G 055-CF	(A) 1~230	50/60	425	1800	66	0,50	63	0	-25..+60	2,6	H1)	

subject to alterations (1) Nominal data in operating point with maximum load and 230 VAC

### Curves:

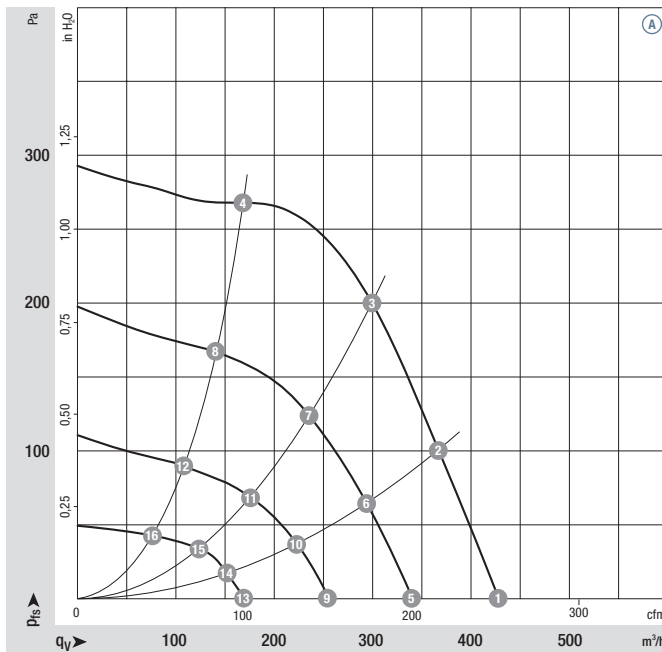


	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
(A) 1	1800	66	0,50	63
(A) 2	1860	58	0,40	61
(A) 3	1970	49	0,35	59
(A) 4	2170	33	0,25	58
(A) 5	1410	33	0,30	58
(A) 6	1500	30	0,25	56
(A) 7	1600	25	0,25	54
(A) 8	1790	18	0,15	53
(A) 9	1060	14	0,15	51
(A) 10	1105	13	0,15	50
(A) 11	1210	11	0,15	47
(A) 12	1355	8	0,10	47
(A) 13	705	4	0,10	40
(A) 14	750	4	0,10	39
(A) 15	800	3	0,10	38
(A) 16	895	3	0,10	37

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.



- **Technical features:**
  - Control input 0-10 VDC / PWM
  - Output 10 VDC max. 1,1 mA
  - Tach output
  - Locked-rotor protection
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-1  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC, GOST; VDE, UL, CSA are applied for

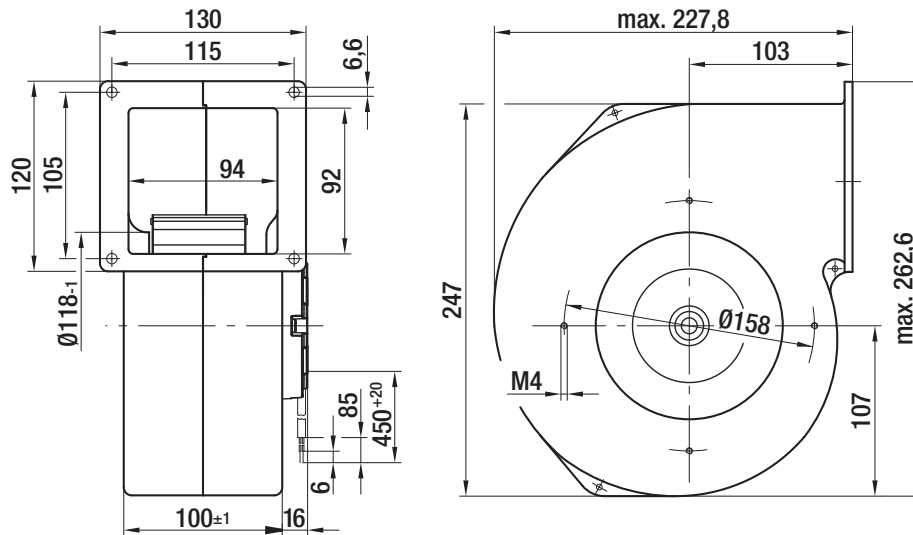

# EC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 160




- **Material:** Housing: Die-cast aluminium  
Impeller: Galvanised sheet steel  
Rotor: Coated in black  
Electronics enclosure: Die-cast aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Shaft horizontal or rotor on top, rotor on bottom on request
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage range	Frequency	Air flow	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	Pa	°C	kg	p. 95	
<b>G3G 160-AC50 -01</b>	M3G 074-CF	(A) 1~200-277	50/60	630	2150	170	1,25	72	0	-25..+60	3,5	H1)	

subject to alterations (1) Nominal data in operating point with maximum load and 230 VAC


**Curves:**

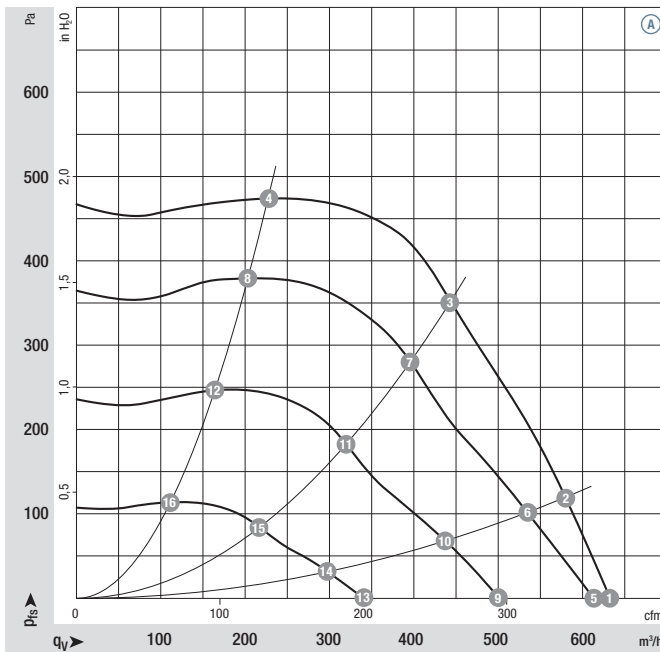

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
(A) 1	2150	170	1,25	72
(A) 2	2310	170	1,25	71
(A) 3	2450	139	1,10	70
(A) 4	2540	91	0,70	68
(A) 5	2070	153	1,10	69
(A) 6	2090	138	1,00	67
(A) 7	2150	101	0,80	65
(A) 8	2205	68	0,60	63
(A) 9	1700	91	0,70	63
(A) 10	1730	80	0,60	62
(A) 11	1760	60	0,50	59
(A) 12	1795	41	0,30	58
(A) 13	1190	37	0,30	54
(A) 14	1200	33	0,30	53
(A) 15	1220	27	0,25	51
(A) 16	1240	20	0,20	48

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:**
  - PFC (passive)
  - Control input 0-10 VDC / PWM
  - Output 10 VDC max. 1,1 mA
  - Tach output
  - Over-temperature protected electronics / motor
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-1  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, EN 61800-5-1, EN 60950-1, CE
- **Approvals:** UL, CSA, CCC; GOST is applied for

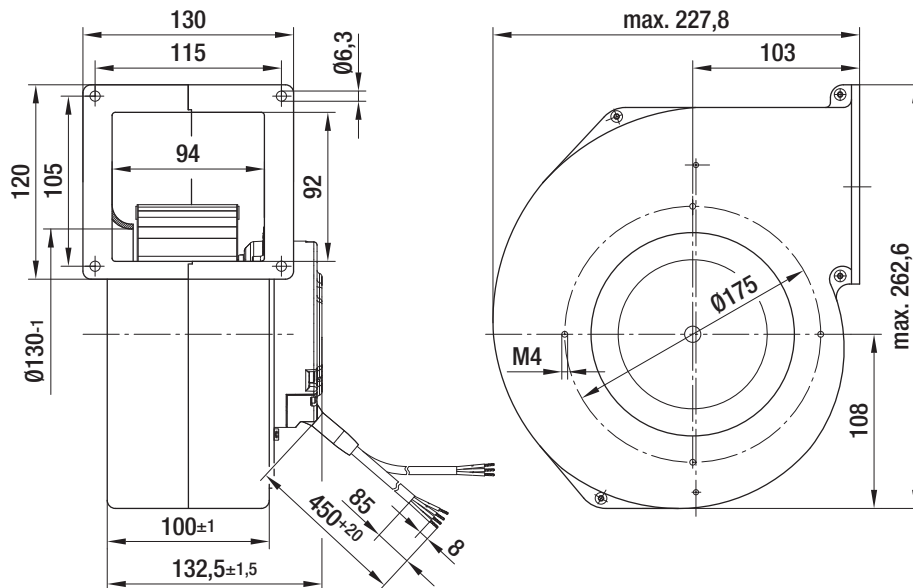

# AC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 108




- **Material:** Housing: Die-cast aluminium  
Impeller: Galvanised sheet steel  
Rotor: Partially cast in aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Input power	Current draw	Capacitor	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	Pa	°C	kg	p. 98	
G2E 108-AG63 -01	M2E 052-BF	Ⓐ	230	50	160	1850	30	0,14	1,0/400	56	0	-25..+85	1,3	A1)

subject to alterations


**Curves:**

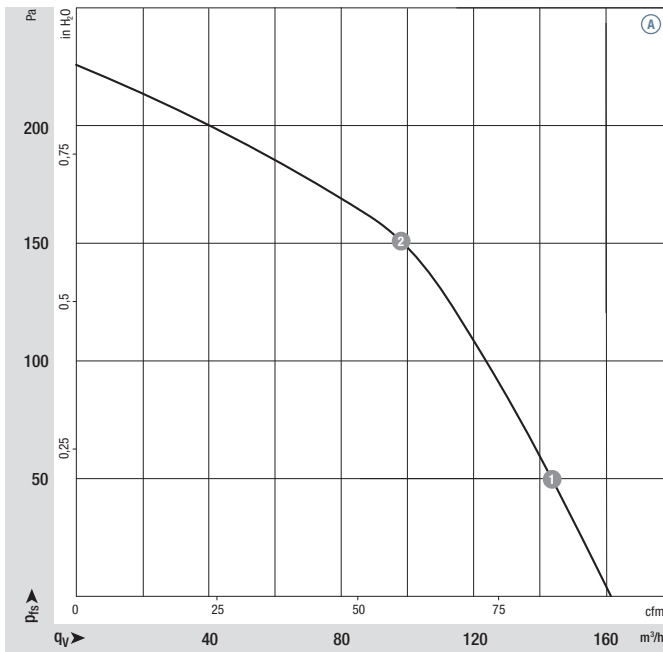

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2050	28	0,12	56
Ⓐ 2	2400	24	0,11	54

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC

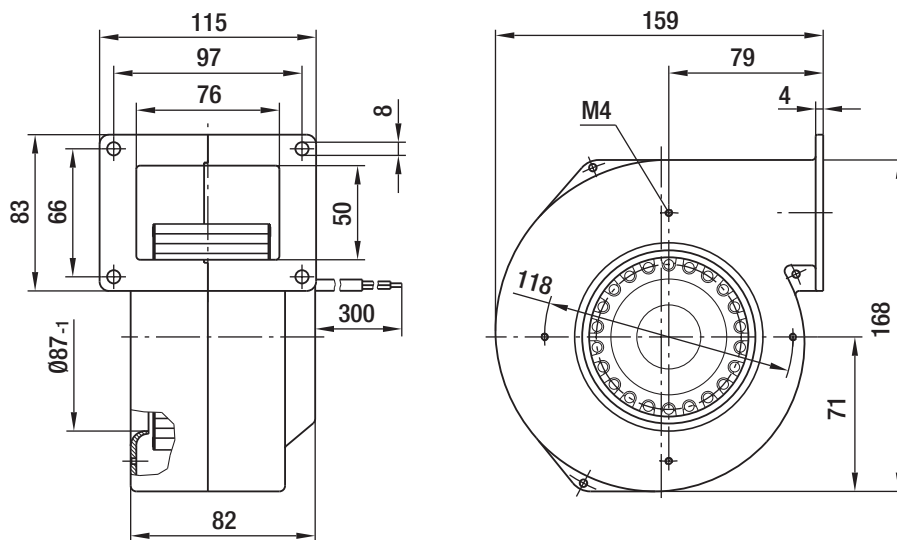



# AC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 120




- **Material:** Housing: Die-cast aluminium  
Impeller: Galvanised sheet steel  
Rotor: Partially cast in aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Input power	Current draw	Capacitor	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	Pa	°C	kg	p. 98	
G2E 120-AR77 -01	M2E 068-BF	Ⓐ	230	50	255	2350	80	0,35	2,0/450	61	0	-25..+55	1,8	A1)

subject to alterations


**Curves:**

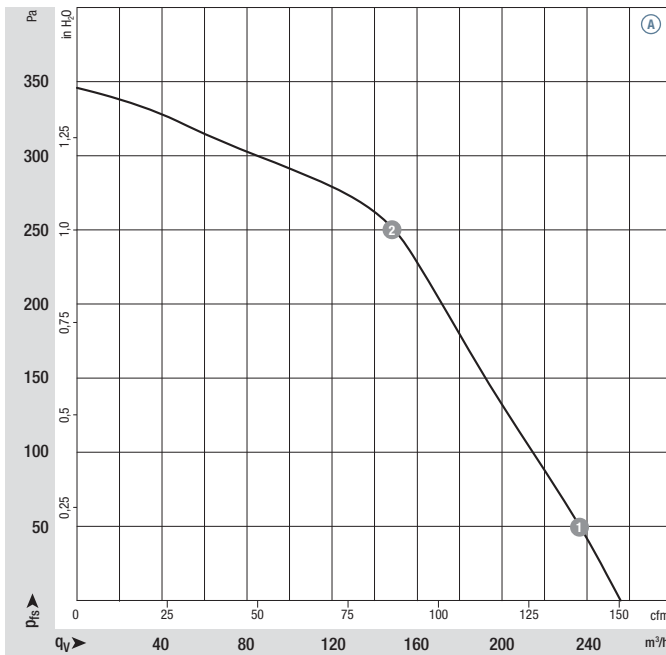

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2460	77	0,34	60
Ⓐ 2	2665	69	0,31	56

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Optional:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC; GOST is applied for

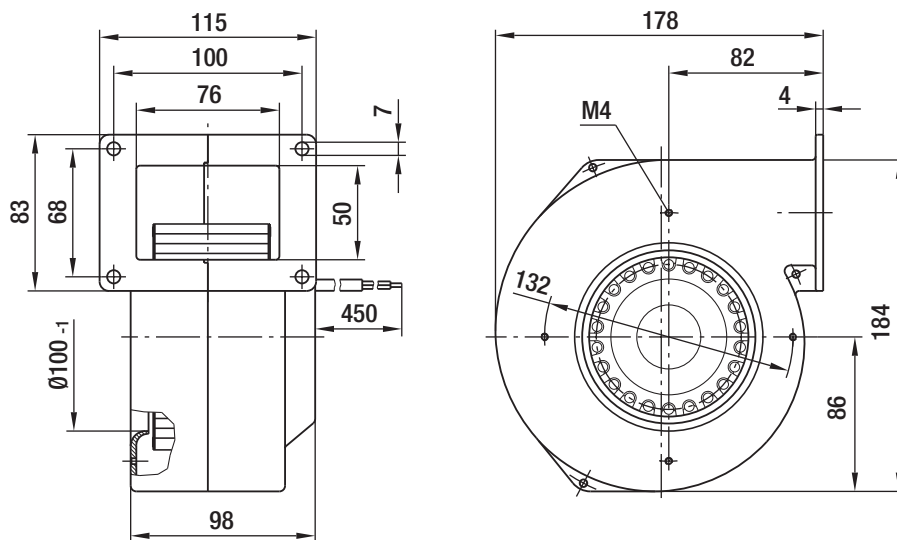

# AC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 140




- **Material:** Housing: Die-cast aluminium  
Impeller: Galvanised sheet steel  
Rotor: Partially cast in aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Input power	Current draw	Capacitor	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	Pa	°C	kg	p. 98	
G2E 140-AL40 -01	M2E 068-CF	Ⓐ 1~230	50	415	1650	135	0,60	2,0/450	63	0	-25..+60	3,0	A1)	
		1~230	60	340	1700	145	0,64	2,0/450	60	100	-25..+40	3,0		

subject to alterations


**Curves:**

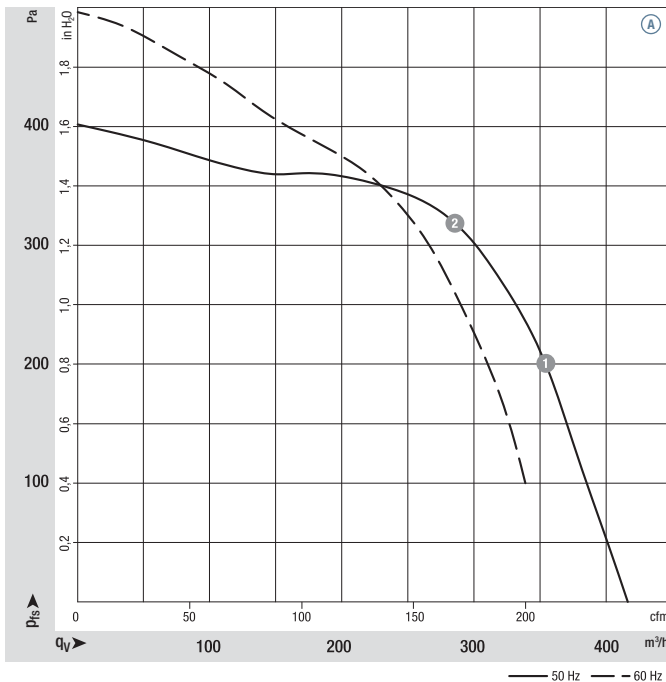

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2100	111	0,48	62
Ⓐ 2	2350	98	0,43	62

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Optional:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC; GOST is applied for

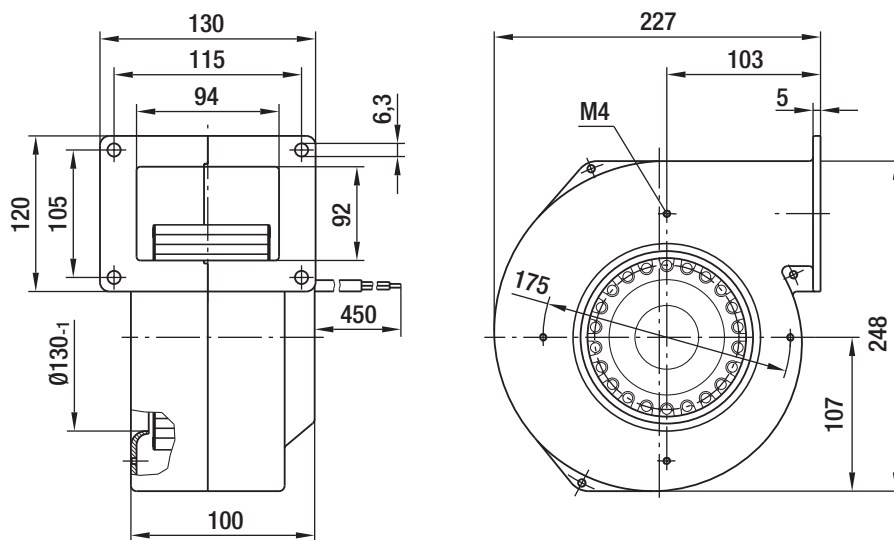

# AC centrifugal blowers (intake air)

for solid fuel heating systems, single inlet, Ø 160




- **Material:** Housing: Die-cast aluminium  
Impeller: Galvanised sheet steel  
Rotor: Partially cast in aluminium
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Input power	Current draw	Capacitor	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	Pa	°C	kg	p. 98	
G2E 160-AY50 -91	M2E 068-EC	Ⓐ	230	50	600	2280	270	1,18	6,0/400	72	100	-25..+60	4,2	A1)

subject to alterations

### Curves:

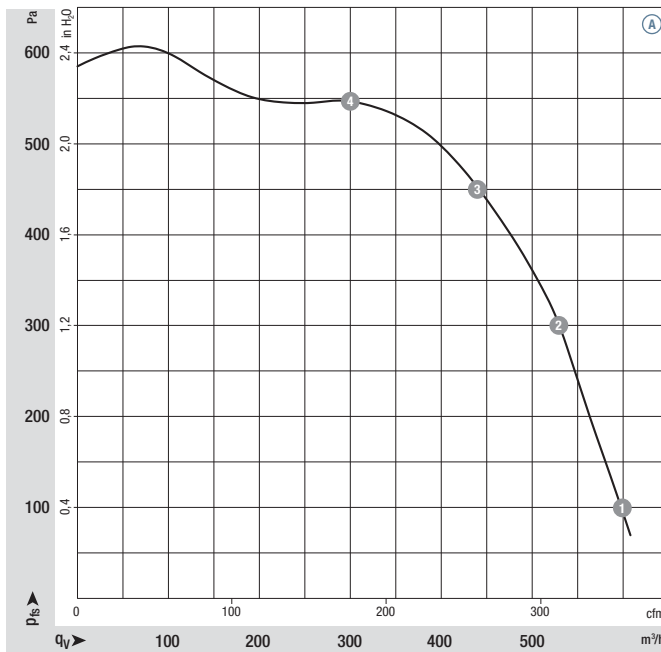


	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2280	270	1,18	72
Ⓐ 2	2480	227	0,98	70
Ⓐ 3	2620	192	0,83	68
Ⓐ 4	2750	152	0,66	67

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.



- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Optional:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC is applied for

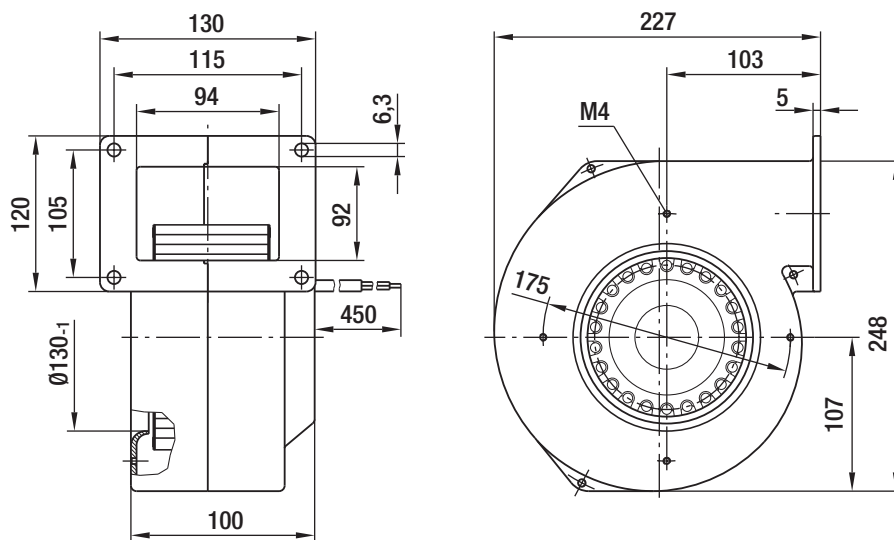

# EC centrifugal blowers (ambient air)

for solid fuel heating systems, dual inlet, Ø 120




- **Material:** Housing: Galvanised sheet steel  
Impeller: Galvanised sheet steel  
Rotor: Uncoated
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Design:** Motor anti-vibration mounted on both sides
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	Pa	°C	kg	p. 96	
<b>D3G 120-AA03 -11</b>	M3G 055-BI	Ⓐ 1~230	50/60	505	1950	83	0,74	58	0	-25..+40	2,2	H4)	

subject to alterations (1) Nominal data in operating point with maximum load and 230 VAC



**Curves:**

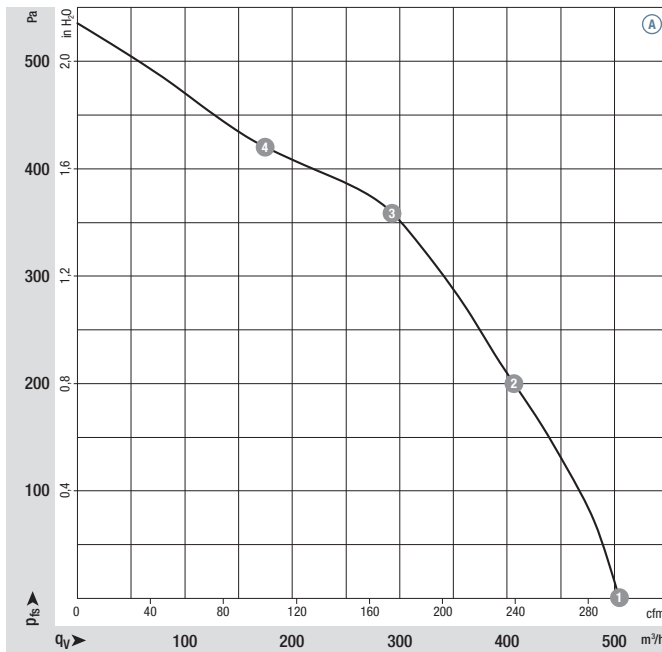

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	1950	83	0,74	58
Ⓐ 2	2465	82	0,70	57
Ⓐ 3	2970	81	0,69	59
Ⓐ 4	3245	66	0,57	60

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:**
  - Control input 0-10 VDC / PWM
  - Output 10 VDC max. 1,1 mA
  - Over-temperature protected electronics / motor
  - Tach output
  - Locked-rotor protection
  - Line undervoltage detection
  - Soft start
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE

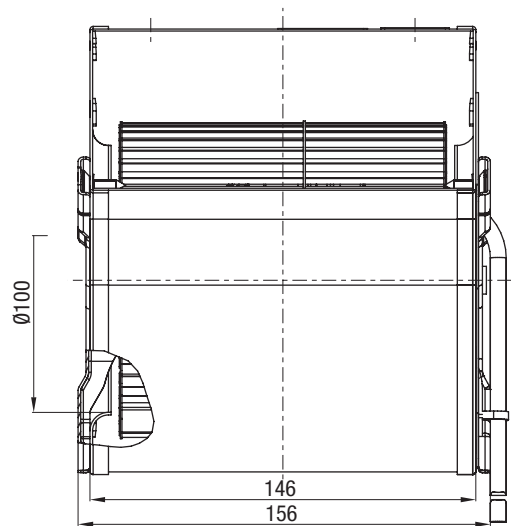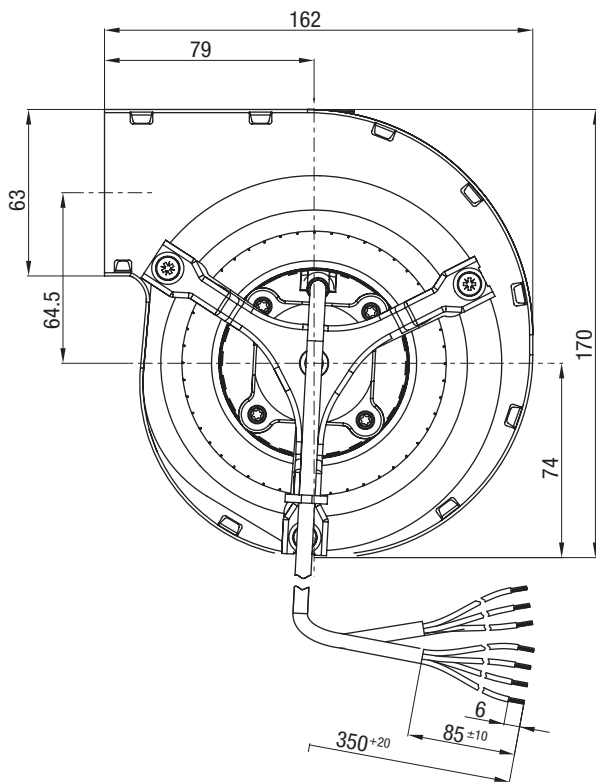

# DC centrifugal blowers (ambient air)

for solid fuel heating systems, dual inlet, Ø 120




- **Material:** Housing: Galvanised sheet steel  
Impeller: Galvanised sheet steel  
Rotor: Coated in black
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 22, depending on installation and position
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** Rotor-side
- **Mode of operation:** Continuous operation (S1)
- **Design:** Motor anti-vibration mounted on both sides
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Nominal voltage range	Air flow	Speed/rpm <sup>(1)</sup>	Max. input power <sup>(1)</sup>	Max. current draw <sup>(1)</sup>	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VDC	VDC	m <sup>3</sup> /h	rpm	W	A	dB(A)	Pa	°C	kg	p. 97	
D1G 120-AA27 -01	M1G 055-CF	Ⓐ	24	16-28	500	1830	61	3,00	56	0	-25..+45	2,2	J5)

subject to alterations



## Curves:

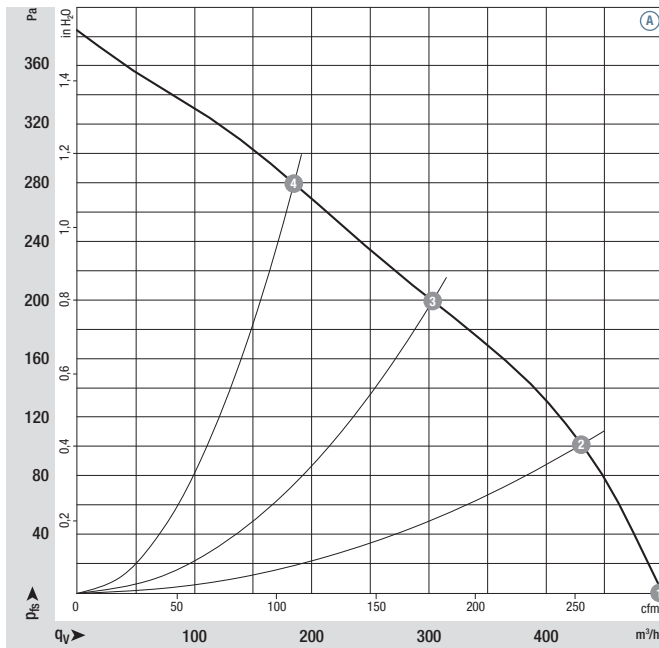

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ ①	1830	61	3,00	56
Ⓐ ②	2020	55	2,62	55
Ⓐ ③	2360	46	2,16	54
Ⓐ ④	2595	37	1,73	55

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:**
  - Control input 0-10 VDC / PWM
  - Motor current limitation
  - Soft start
  - Tach output
  - Reverse polarity and locked-rotor protection
  - Line undervoltage detection
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1

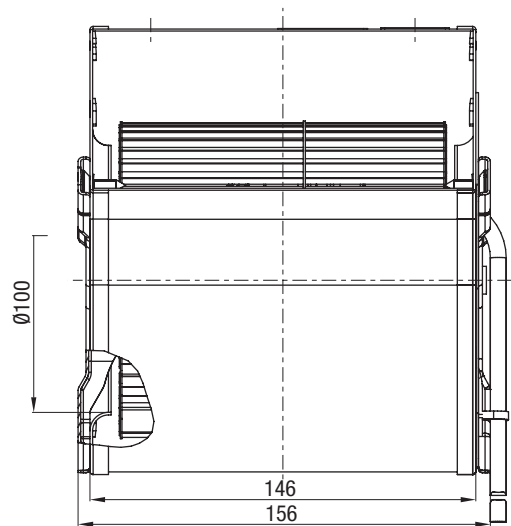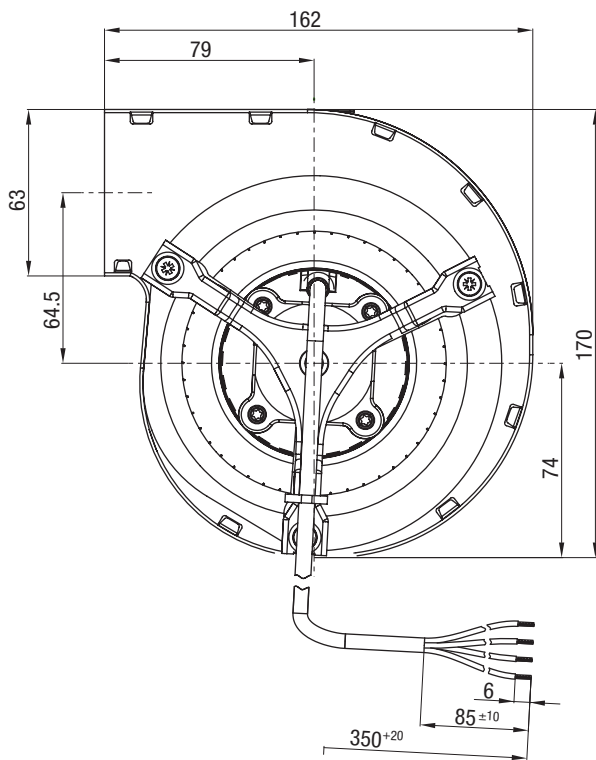

# AC centrifugal blowers (ambient air)

for solid fuel heating systems, dual inlet, Ø 120




- **Material:** Housing: Galvanised sheet steel  
Impeller: Galvanised sheet steel  
Rotor: Uncoated
- **Direction of rotation:** Clockwise, seen on rotor
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Design:** Motor anti-vibration mounted on both sides
- **Bearings:** Maintenance-free ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Input power	Current draw	Capacitor	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	Pa	°C	kg	p. 98	
D2E 120-AA01 -04	M2E 068-BF	Ⓐ	230	50	375	1400	85	0,38	2,0/400	50	0	-25..+70	2,4	A1)

subject to alterations



**Curves:**

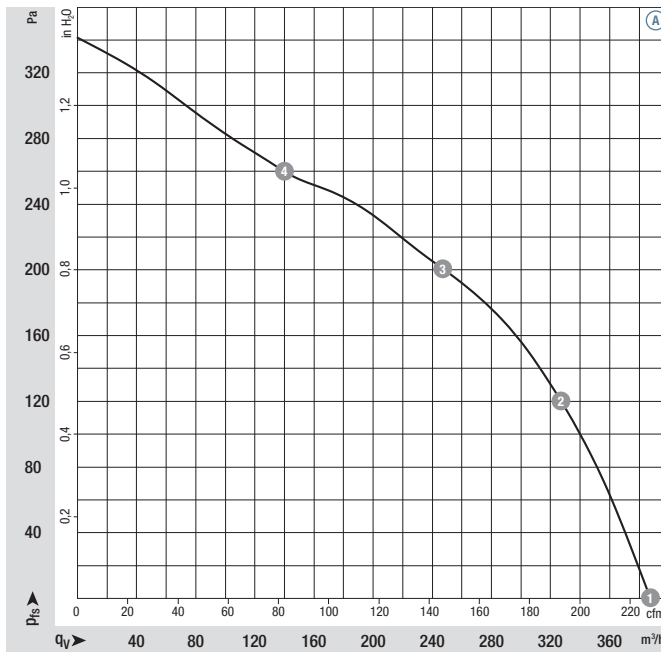

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	1400	85	0,38	50
Ⓐ 2	1905	76	0,33	51
Ⓐ 3	2265	65	0,28	52
Ⓐ 4	2500	58	0,25	53

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE

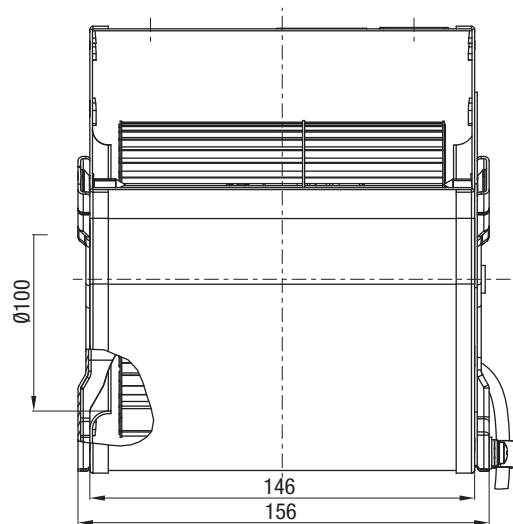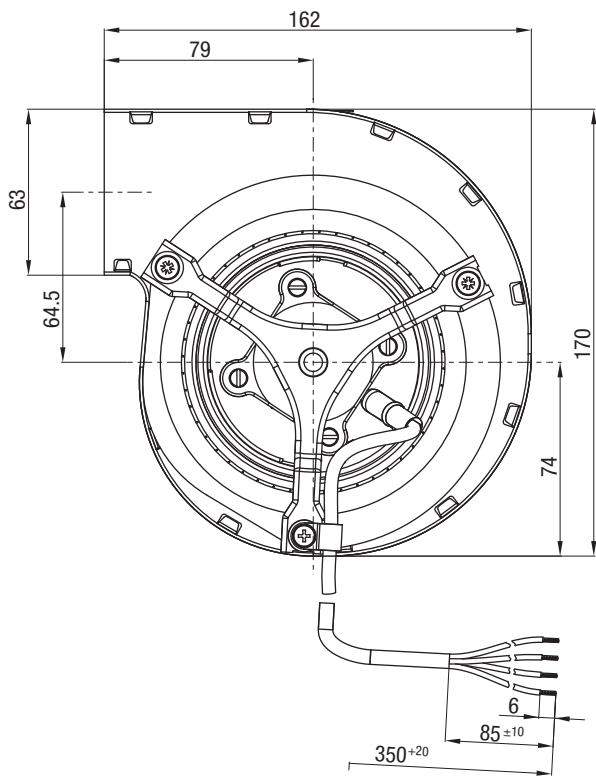



# Tangential blowers (ambient air)

QLZ 06





- **Impeller diameter:** 60 mm
- **Mounting position:** horizontal or vertical with motor on bottom
- **Permissible ambient temperature:** 0 - 60 °C (up to 100°C on request)
- **Insulation class:** "H"

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Max. pressure increase	Input power	Current draw	Speed/rpm	Mass	Electr. connection	Dimensions (mm)					
Motor right*	Motor left	VAC	Hz	m <sup>3</sup> /h	Pa	W	mA	rpm	kg	p. 98	a	b	c	d	e	f	
QLZ06/2400-3030	QLZ06/0024-3030	A	230	50	170	63	34	290	1700	1,40	B)	324	62	243	253	212	93
QLZ06/3000-3038	QLZ06/0030-3038	B	230	50	230	60	45	350	1600	1,70	B)	395	72	303	313	272	123


subject to alterations

\* Corresponding to dimensional drawing; Technical data are valid at free air flow and rated voltage

## Curves:

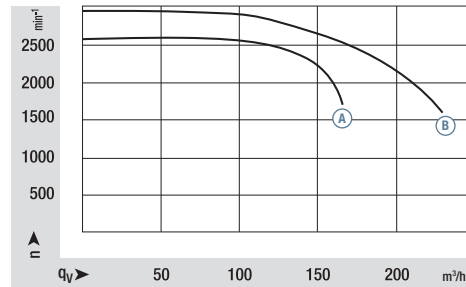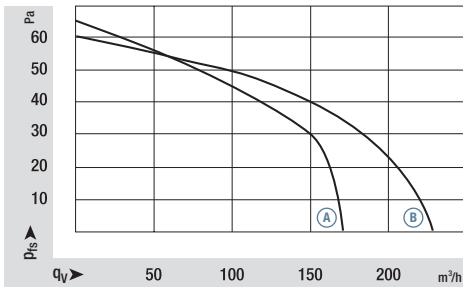

## Drawings:

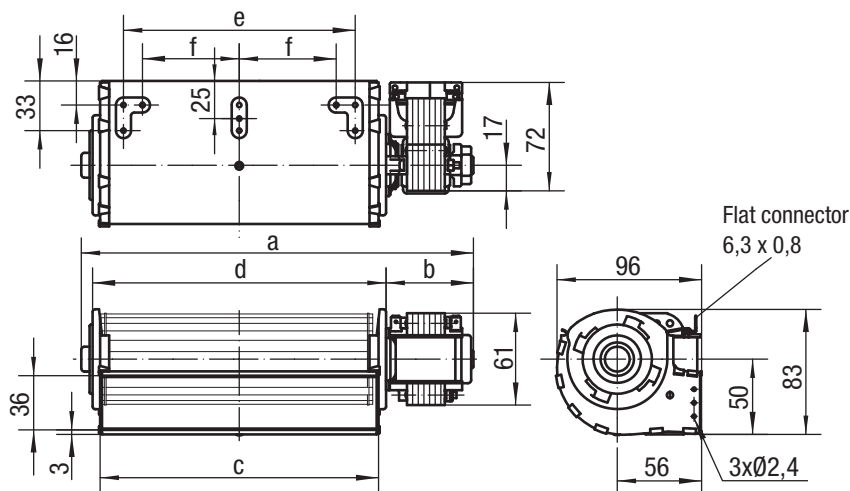

# Tangential blowers (ambient air)

QLN 65





- **Impeller diameter:** 65 mm
- **Mounting position:** horizontal or vertical with motor on bottom
- **Permissible ambient temperature:** 0 - 60 °C (-40°C up to +100°C on request)
- **Insulation class:** "H"

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Max. pressure increase	Input power	Current draw	Speed/rpm	Mass	Electr. connection	Dimensions (mm)					
Motor right*	Motor left	VAC	Hz	m <sup>3</sup> /h	Pa	W	mA	rpm	kg	p. 98	a	b	c	d	e	f	
QLN65/2400-3030	QLN65/0024-3030	A	230	50	220	80	38	360	1200	1,45	B)	331	65	242	259	212	106
QLN65/3000-3038	QLN65/0030-3038	B	230	50	250	80	45	415	1200	1,75	B)	400	73	302	319	272	136
QLN65/3600-3038	QLN65/0036-3038	C	230	50	380	95	78	700	1500	1,80	B)	460	73	362	379	332	166


subject to alterations

\* Corresponding to dimensional drawing; Technical data are valid at free air flow and rated voltage

## Curves:

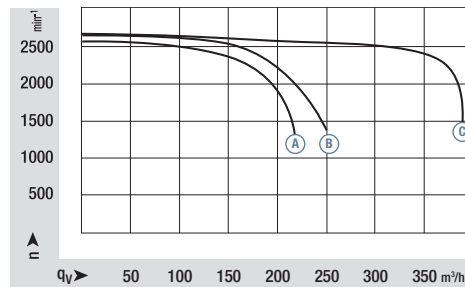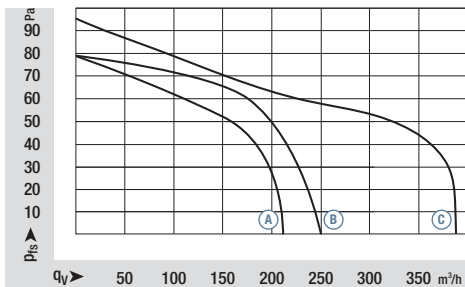

## Drawings:

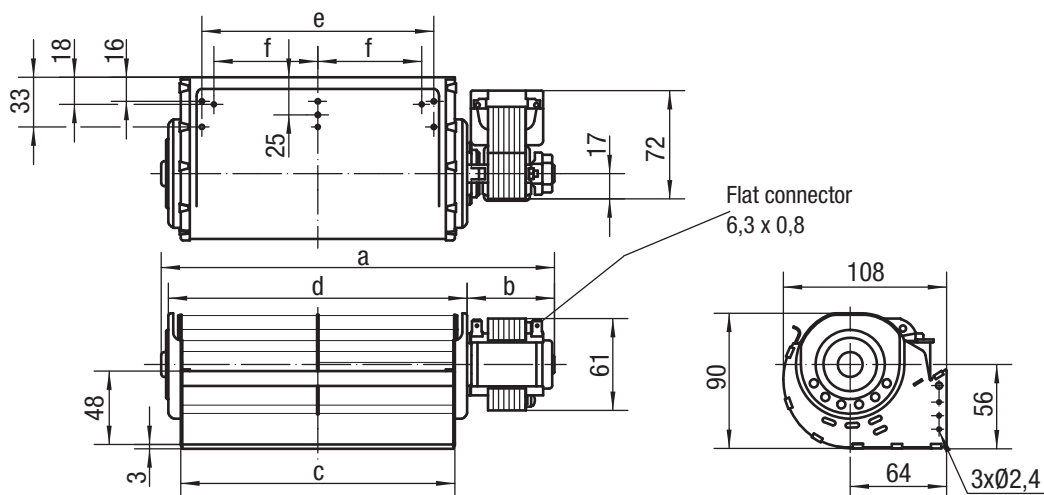

# Tangential blowers (ambient air)

QLZ 06 with EC motor





- **Electronics:** integrated
- **Blower speed:** variable via PWM signal (interface 11, standard), optionally via 0-10 V analogue voltage signal (interface 26, on request)
- **Impeller diameter:** 60 mm
- **Mounting position:** horizontal or vertical with motor on bottom
- **Permissible ambient temperature:** 0 - 60 °C
- **Insulation class:** "F"
- **Type of protection:** IP 20

Nominal data		Curve	Nominal voltage	Air flow	Max. pressure increase	Input power	Speed/rpm	Mass	Electr. connection	Dimensions (mm)					
Motor right*	Motor left	VDC	m <sup>3</sup> /h	Pa	W	rpm	kg	p. 94	a	b	c	d	e	f	
QLZ06/2400-2212	QLZ06/0024-2212	A	24	220	80	17	1800	0,80	11)	327	64,5	243	253	212	93
QLZ06/3000-2212	QLZ06/0030-2212	B	24	280	80	19	1850	0,85	11)	387	64,5	303	313	272	123



subject to alterations

\* Corresponding to dimensional drawing; Technical data are valid at free air flow and rated voltage

## Curves:

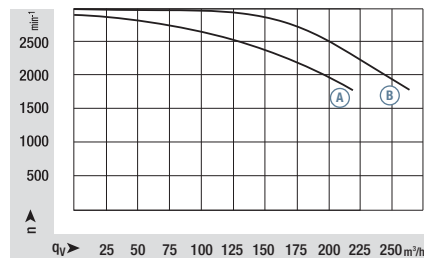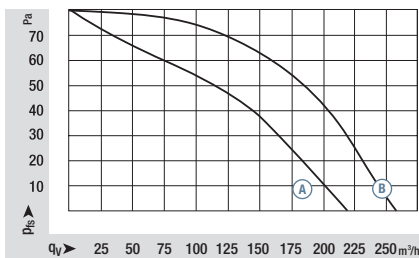

## Drawings:

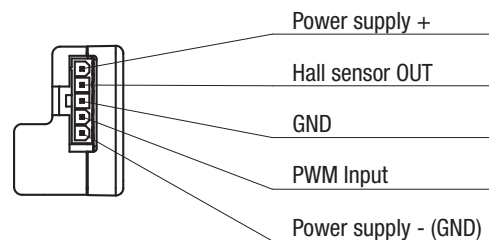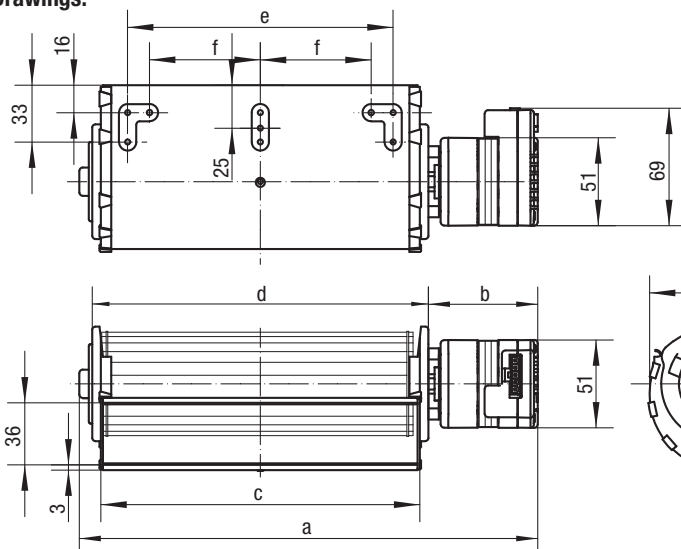

Suitable for connector Molex Mini-Fit, Jr. (not part of delivery)  
 Connector: order number 39-01-4050  
 Female terminal: for example 39-00-0059

# Tangential blowers (ambient air)

QLN 65 with EC Motor





- **Electronics:** integrated
- **Blower speed:** variable via PWM signal (interface 11, standard), optionally via 0-10 V analogue voltage signal (interface 26, on request)
- **Impeller diameter:** 65 mm
- **Mounting position:** horizontal or vertical with motor on bottom
- **Permissible ambient temperature:** 0 - 60 °C
- **Insulation class:** "F"
- **Type of protection:** IP 20

Nominal data		Curve	Nominal voltage	Air flow	Max. pressure increase	Input power	Speed/rpm	Mass	Electr. connection	Dimensions (mm)					
Motor right*	Motor left	VDC	m <sup>3</sup> /h	Pa	W	rpm	kg	p. 94	a	b	c	d	e	f	
QLN65/2400-2212	QLN65/0024-2212	A	24	260	60	15	1600	0,85	11)	329	64,5	242	139	214	106
QLN65/3000-2212	QLN65/0030-2212	B	24	320	60	18	1600	0,90	11)	389	64,5	302	139	274	136
QLN65/3600-2212	QLN65/0036-2212	C	24	360	60	19	1600	0,95	11)	449	64,5	362	139	334	166


subject to alterations

\* Corresponding to dimensional drawing; Technical data are valid at free air flow and rated voltage

## Curves:

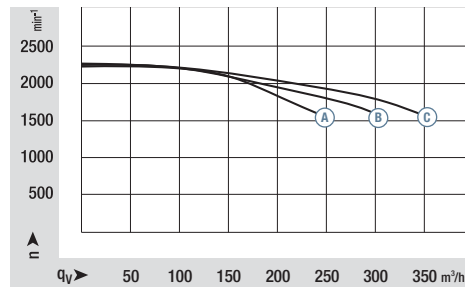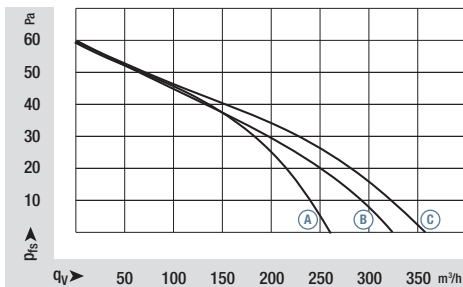

## Drawings:

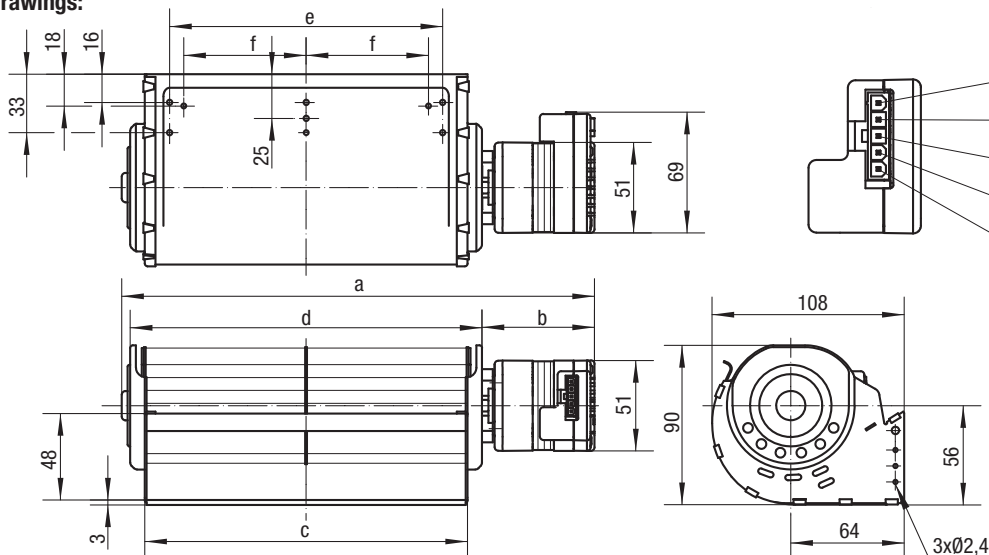

Suitable for connector Molex Mini-Fit, Jr. (not part of delivery)  
 Connector: order number 39-01-4050  
 Female terminal: for example 39-00-0059



## EC/AC centrifugal fans (exhaust air)



# EC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 140




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 96, 99	
<b>R3G 140-AG03 -**</b>	M3G 055-AI	Ⓐ 1~200-240	50/60	220	2650	18	0,15	65	-25..+60	1,3	H4), C)	

subject to alterations

## Curves:

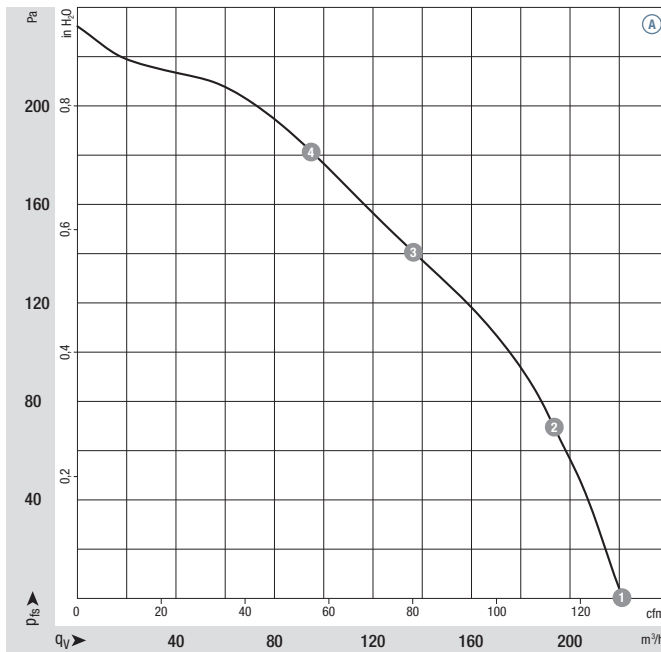

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2650	18	0,15	---
Ⓐ 2	2635	18	0,15	---
Ⓐ 3	2660	18	0,14	---
Ⓐ 4	2690	16	0,13	---

Air performance measured as per: ISO 5801, Installation category A, with measuring device without protection against accidental contact. Suction-side noise levels: LW<sub>A</sub> as per ISO 13347, Lp<sub>A</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Technical features:** See electrical connections p. 96
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R3G 140-AG03 -**	R3G 140-AG03 -01	R3G 140-AG03 -05	140	42	53,5	87	116

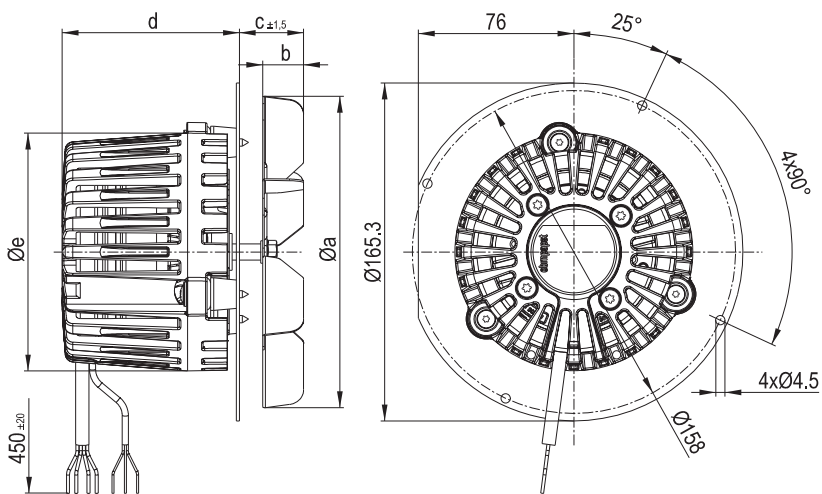

**Connection:**

- 1 = N (blue)
- 2 = PE (green/yellow)
- 3 = L (black)
- 4 = 0-10V/PWM (yellow)
- 5 = GND (blue)
- 6 = Tacho (white)

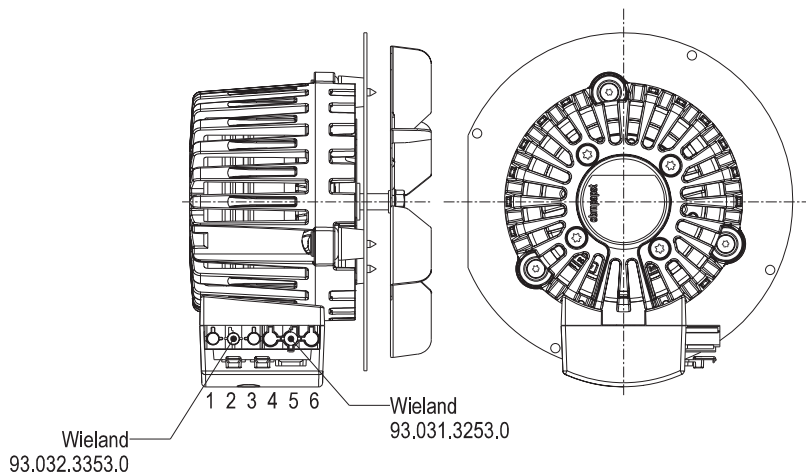



# EC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 150




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 96, 99	
<b>R3G 150-AA03 -**</b>	M3G 055-AI	Ⓐ 1~200-240	50/60	145	2530	16	0,17	---	-25..+60	1,25	H4), C)	
<b>R3G 150-AC01 -**</b>	M3G 055-BD	Ⓑ 1~200-240	50/60	275	2770	30	0,30	---	-25..+60	1,45	H4), C)	

subject to alterations

## Curves:

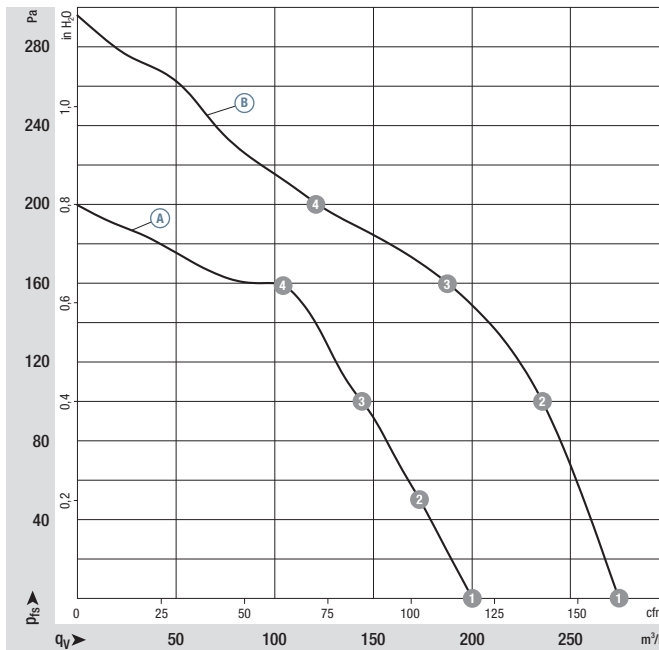

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ ①	2530	16	0,17	---
Ⓐ ②	2540	16	0,17	---
Ⓐ ③	2600	14	0,16	---
Ⓐ ④	2650	13	0,15	---
Ⓑ ①	2803	29	0,30	---
Ⓑ ②	2770	30	0,30	---
Ⓑ ③	2796	29	0,30	---
Ⓑ ④	2830	27	0,29	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Technical features:** See electrical connections p. 96
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R3G 150-AA03 -**	R3G 150-AA03 -01	R3G 150-AA03 -05	152	20	31,5	87	116
R3G 150-AC01 -**	R3G 150-AC01 -01	R3G 150-AC01 -05	148	42	53,5	108	119

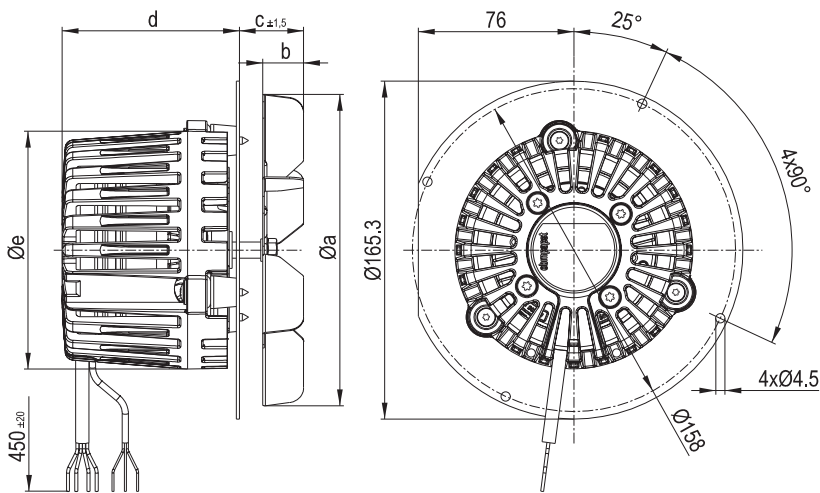

**Connection:**

- 1 = N (blue)
- 2 = PE (green/yellow)
- 3 = L (black)
- 4 = 0-10V/PWM (yellow)
- 5 = GND (blue)
- 6 = Tacho (white)

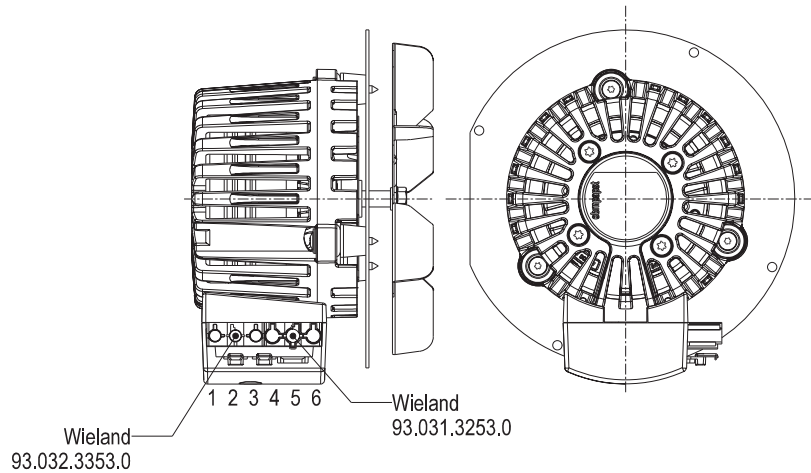

# DC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 150




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 20
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Nominal voltage range	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Min. back pressure	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VDC	VDC	m³/h	rpm	W	A	dB(A)	Pa	°C	kg	p. 97	
R1G 150-AA63 -**	M1G 055-BD	Ⓐ	24	16-28	290	3040	30	1,40	66	0	-25..+50	1,3	J5)
		Ⓑ	24	16-28	180	3110	28	1,31	67	0	-25..+50	1,3	

subject to alterations

Ⓐ measured without scroll housing Ⓑ measured with scroll housing

## Curves:

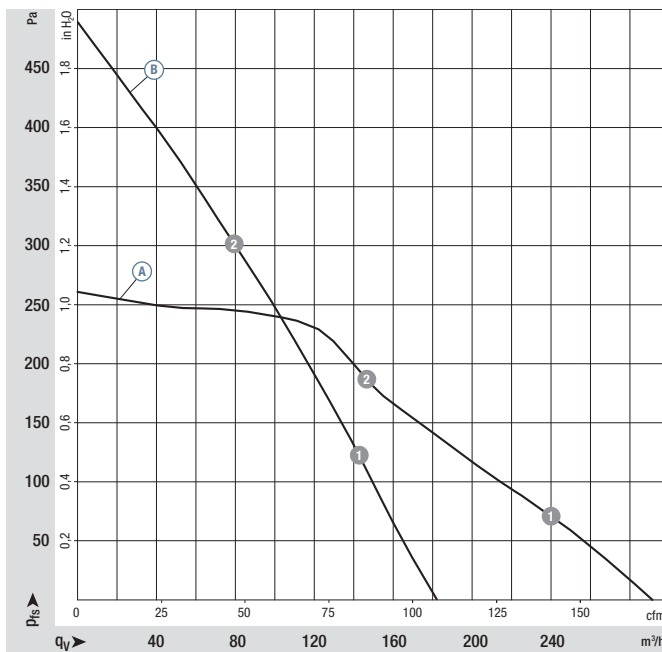

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	3030	31	1,40	---
Ⓐ 2	3110	29	1,30	---
Ⓑ 1	3190	26	1,20	---
Ⓑ 2	3360	22	1,00	---

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Technical features:**
  - Control input 0-10 VDC / PWM
  - Motor current limitation
  - Soft start
  - Tach output
  - Reverse polarity and locked-rotor protection
  - Line undervoltage detection
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R1G 150-AA63 -**	R1G 150-AA63 -01	R1G 150-AA63 -05	148	42	53,5	108	119

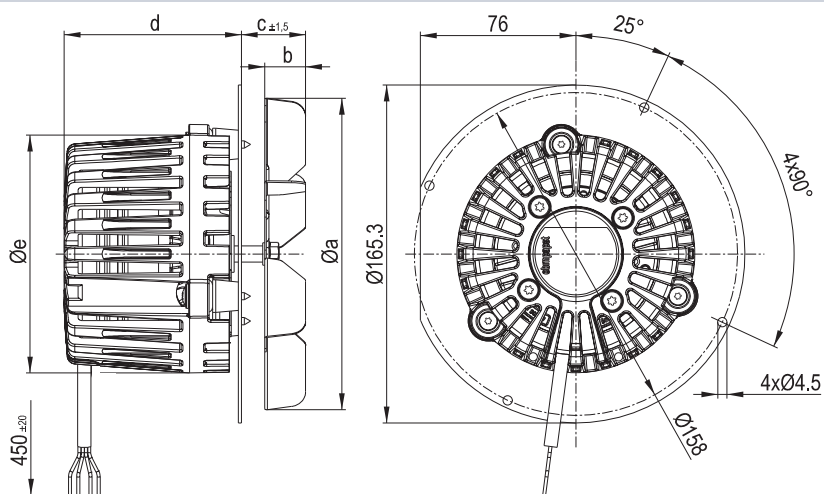

**Anschluss:**

- 1 = GND (blue)
- 2 = unlined
- 3 = UN +24 VDC (red)
- 4 = Tach (white)
- 5 = unlined
- 6 = 0-10 VDC (yellow)

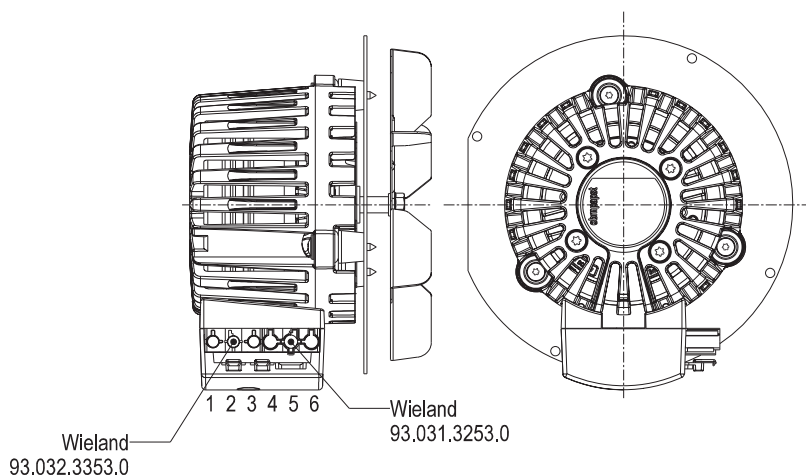

# EC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 160




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 96, 99	
<b>R3G 160-AE01</b> -**	M3G 055-BD	Ⓐ 1~200-240	50/60	305	2600	40	0,33	66	-25..+60	1,55	H4), C)	

subject to alterations

## Curves:

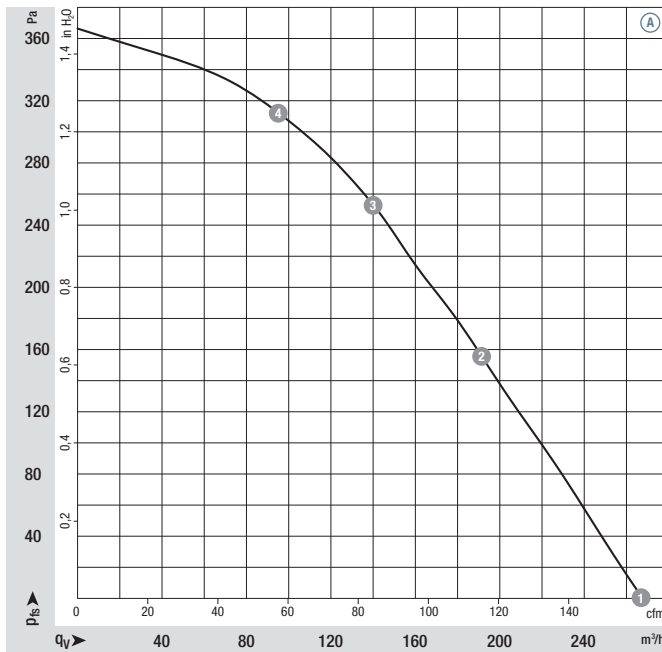

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2600	40	0,33	---
Ⓐ 2	2650	40	0,33	---
Ⓐ 3	2670	38	0,27	---
Ⓐ 4	2740	35	0,26	---

Air performance measured as per: ISO 5801, Installation category A, with scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Technical features:** See electrical connections p. 96
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R3G 160-AE01 -**	R3G 160-AE01 -01	R3G 160-AE01 -05	160	44	49,5	108	119

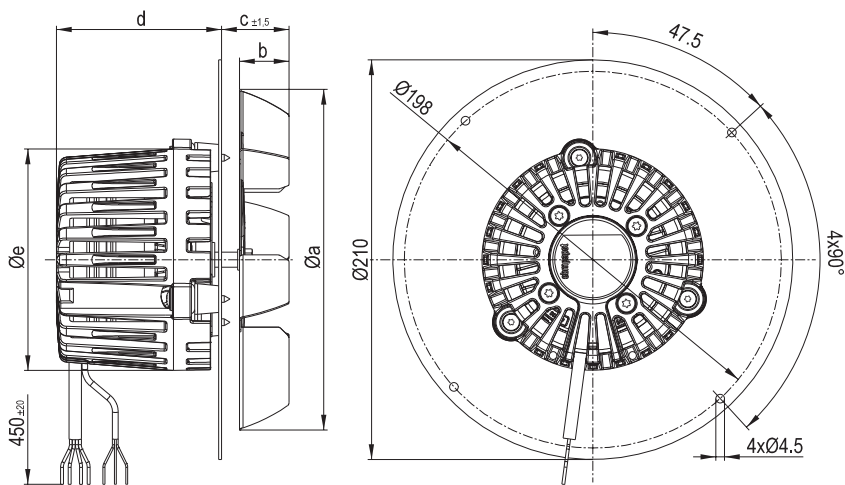

**Connection:**

- 1 = N (blue)
- 2 = PE (green/yellow)
- 3 = L (black)
- 4 = 0-10V/PWM (yellow)
- 5 = GND (blue)
- 6 = Tacho (white)

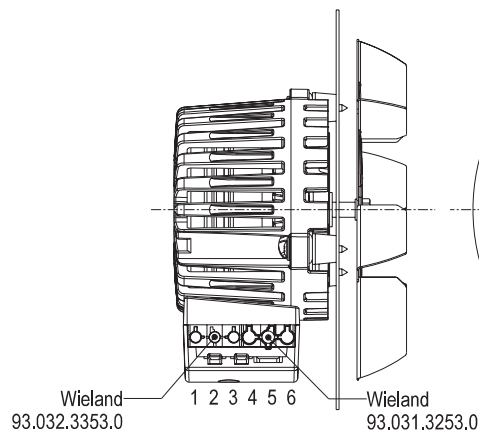

# EC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 180




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 96, 99	
R3G 180-AH01 -**	M3G 055-BD	Ⓐ 1~200-240	50/60	295	2150	25	0,28	---	-25..+50	1,65	H4), C)	
R3G 180-AJ11 -**	M3G 055-CF	Ⓑ 1~200-240	50/60	440	2660	60	0,55	---	-25..+50	1,90		

subject to alterations

## Curves:

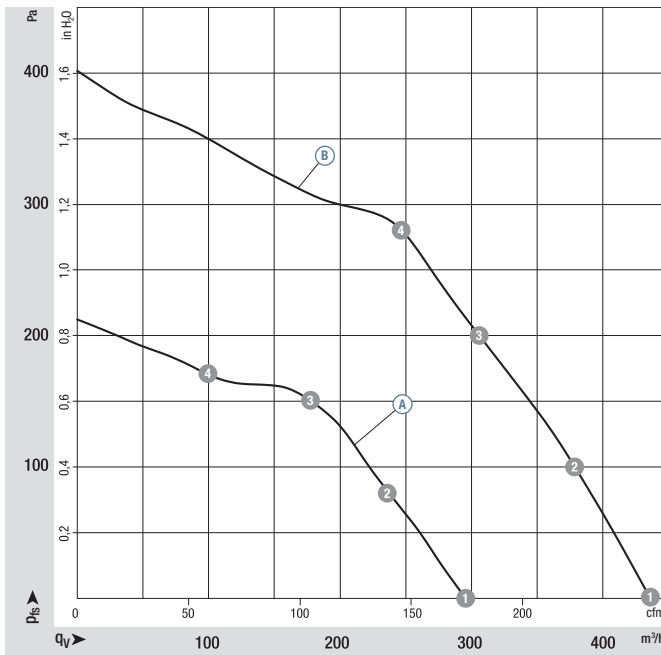

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ ①	2150	25	0,28	---
Ⓐ ②	2150	25	0,28	---
Ⓐ ③	2220	23	0,26	---
Ⓐ ④	2285	20	0,24	---
Ⓑ ①	2660	60	0,55	---
Ⓑ ②	2635	60	0,52	---
Ⓑ ③	2685	59	0,50	---
Ⓑ ④	2730	56	0,49	---

Air performance measured as per: ISO 5801, Installation category A, with measuring device without protection against accidental contact. Suction-side noise levels: LW<sub>A</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Technical features:** See electrical connections p. 96
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R3G 180-AH01 -**	R3G 180-AH01 -01	R3G 180-AH01 -05	180	26	44,5	108	119
R3G 180-AJ11 -**	R3G 180-AJ11 -01	R3G 180-AJ11 -05	180	45	54,5	108	119

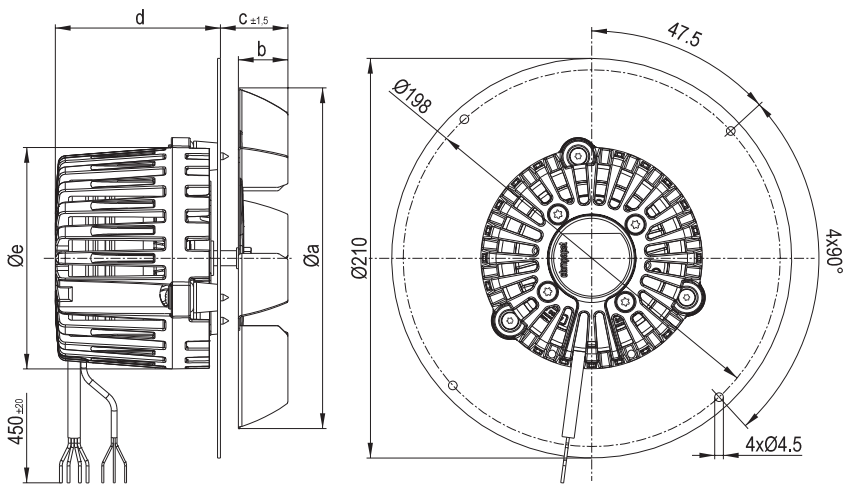

**Connection:**

- 1 = N (blue)
- 2 = PE (green/yellow)
- 3 = L (black)
- 4 = 0-10V/PWM (yellow)
- 5 = GND (blue)
- 6 = Tacho (white)

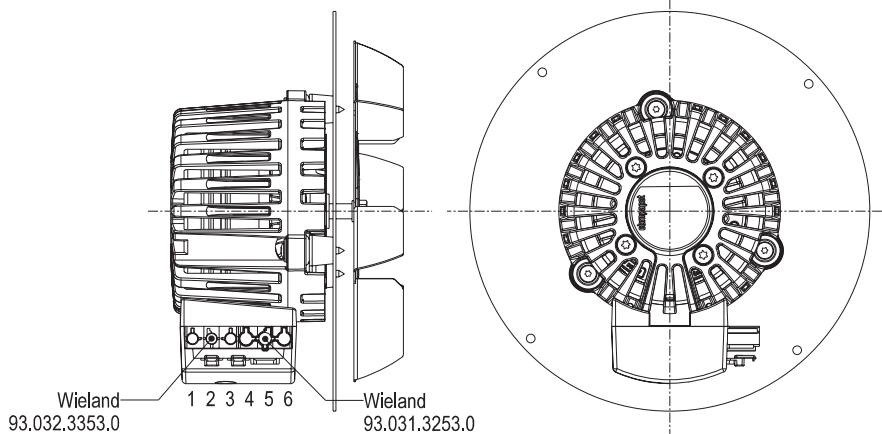



# EC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 210




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None (open rotor)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 95, 99	
<b>R3G 210-AA73 -**</b>	M3G 074-CF	Ⓐ 1~200-240	50/60	495	3200	170	1,35	---	-25..+40	4,5	H1), C)	

subject to alterations

## Curves:

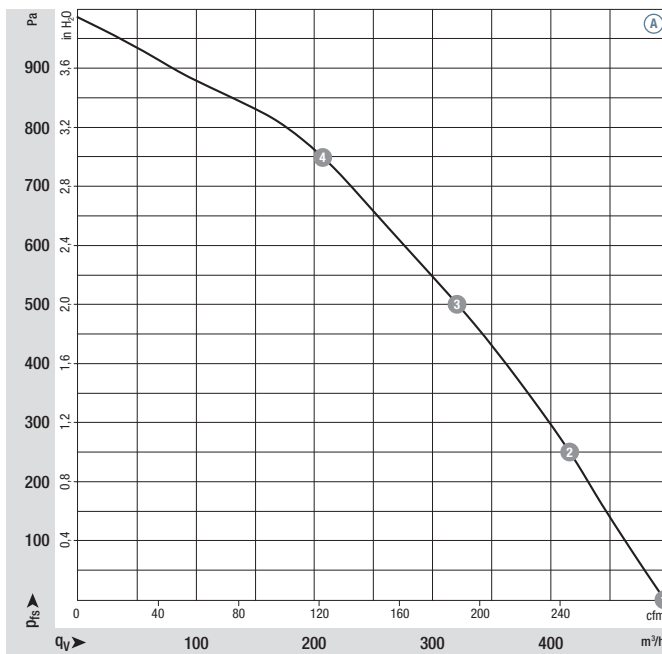

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	3200	170	1,35	---
Ⓐ 2	3230	159	1,29	---
Ⓐ 3	3260	141	1,16	---
Ⓐ 4	3310	118	0,99	---


Air performance measured as per: ISO 5801, Installation category A, with scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:**
  - PFC (passive)
  - Control input 0-10 VDC / PWM
  - Output 10 VDC max. 1,1 mA
  - Tach output
  - Over-temperature protected electronics / motor
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, EN 61800-5-1, EN 60950-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



### Selection

Type	Cable design	Plug design
R3G 210-AA73 -**	R3G 210-AA73 -01	R3G 210-AA73 -05

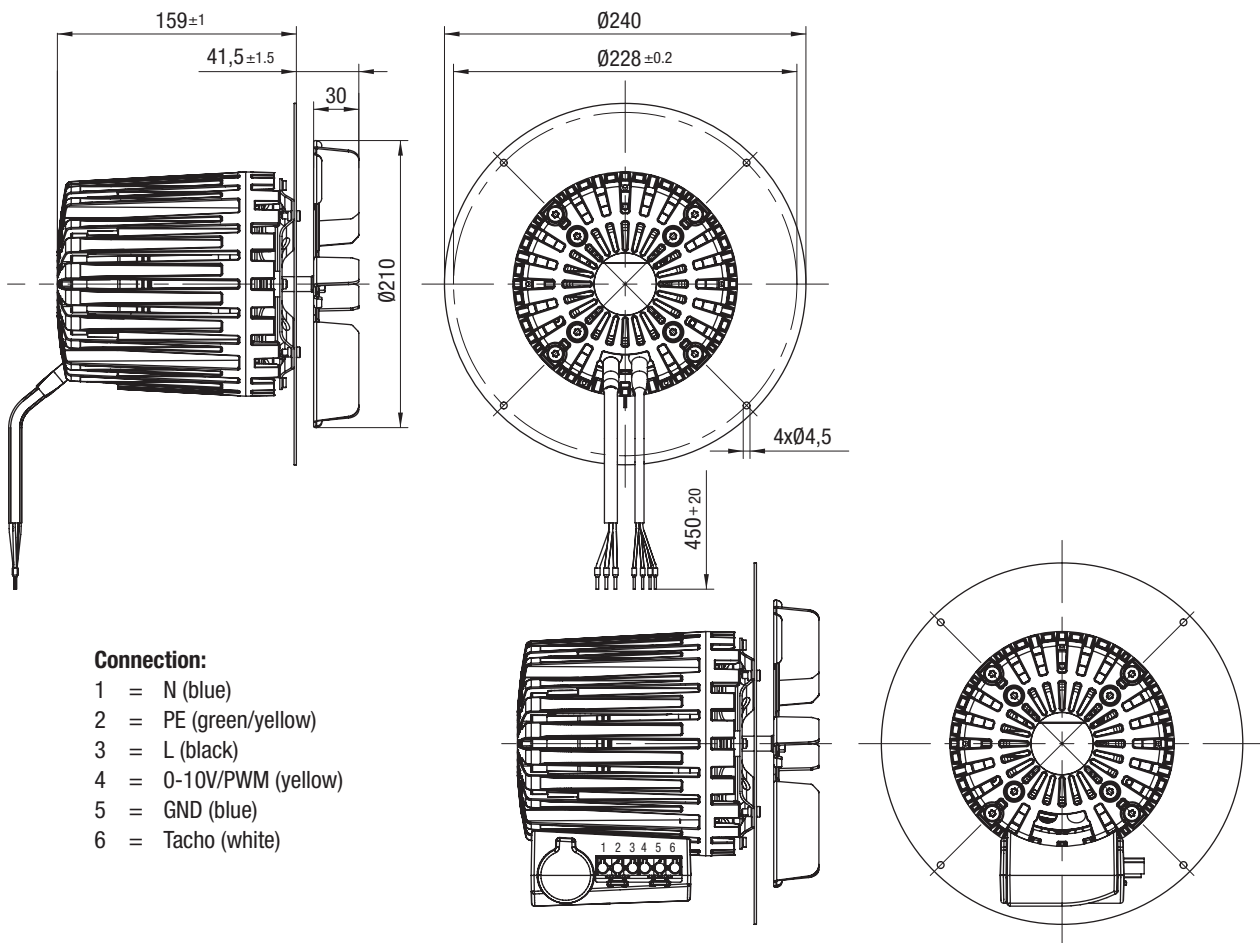

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 152




- **Material:** Impeller: Corrosion resistant stainless steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 00
- **Insulation class:** "H"
- **Mounting position:** Shaft position horizontal or shaft position vertical (motor on top)
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Sleeve bearings / ball bearings

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 98	
RR 152 - 3030 LH	EM 3030	Ⓐ	230	50	235	2575	44	0,37	61	-25..+85	1,00	B)
		Ⓑ	230	50	150	2600	44	0,37	62	-25..+85	1,00	

subject to alterations

Ⓐ measured without ebm-papst scroll housing Ⓑ measured with ebm-papst scroll housing


## Curves:

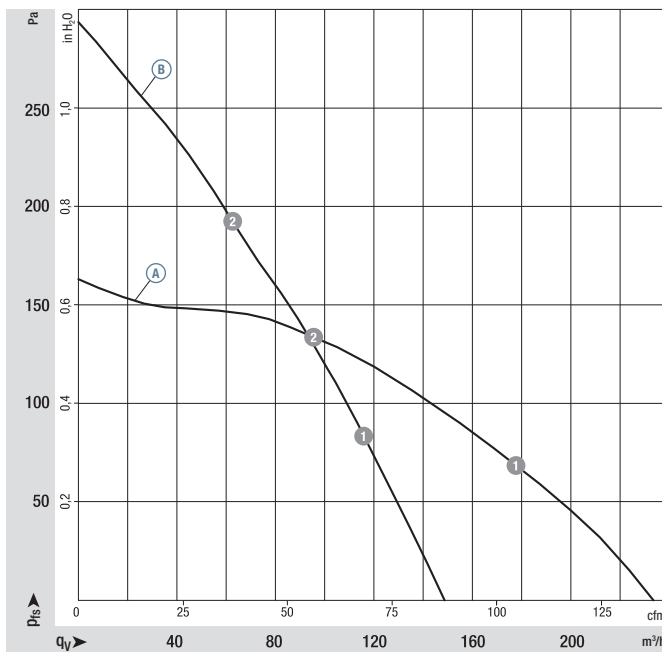

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2540	45	---	---
Ⓐ 2	2620	42	---	---
Ⓑ 1	2640	42	---	---
Ⓑ 2	2730	39	---	---

Air performance measured as per: ISO 5801, Installation category A, without protection against accidental contact.  
Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Electrical connection:** via flat pin
- **Optional:** Hall IC connection, motor protection hood
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1
- **Approvals:** VDE-compliant design, optionally UL-compliant design possible

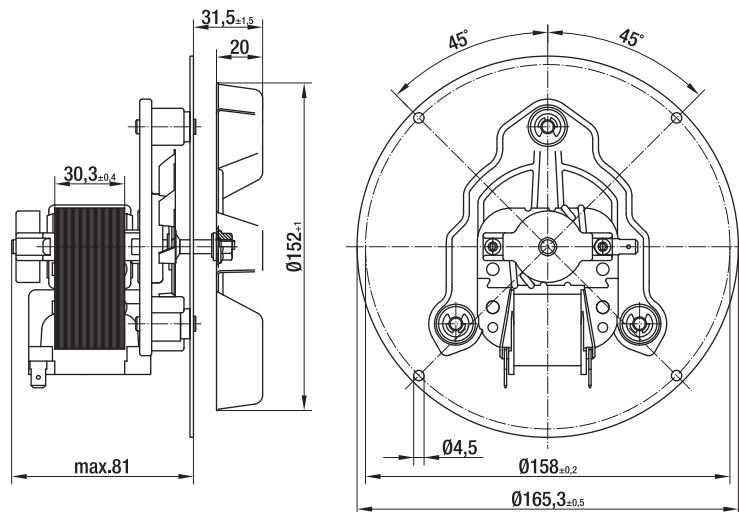

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 140




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
R2E 140-CD76 -**	M2E 068-BF	Ⓐ	230	50	215	2650	28	0,14	0,68/400	---	-25..+60	1,6	A1), D)

subject to alterations

## Curves:

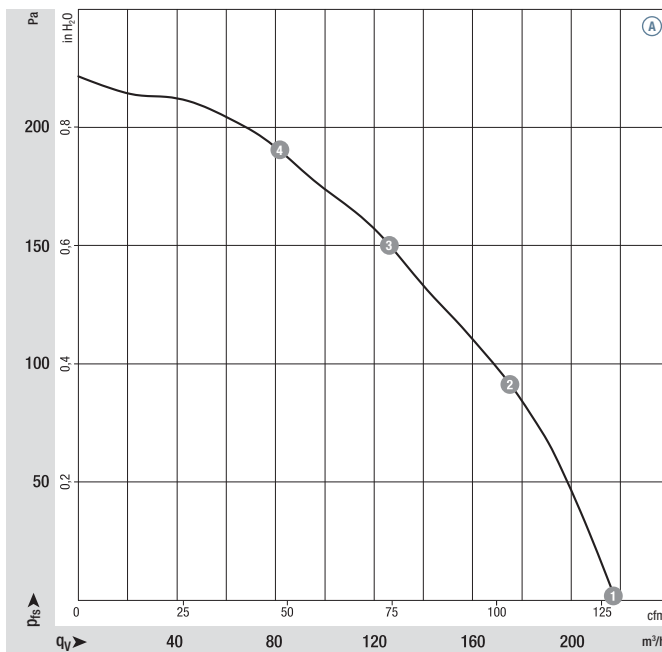

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2650	28	0,14	---
Ⓐ 2	2635	28	0,14	---
Ⓐ 3	2660	28	0,13	---
Ⓐ 4	2695	26	0,12	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Optional:** also possible, without protection hood
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R2E 140-CD76 -**	R2E 140-CD76 -01	R2E 140-CD76 -05	140	42	53,5	87	116

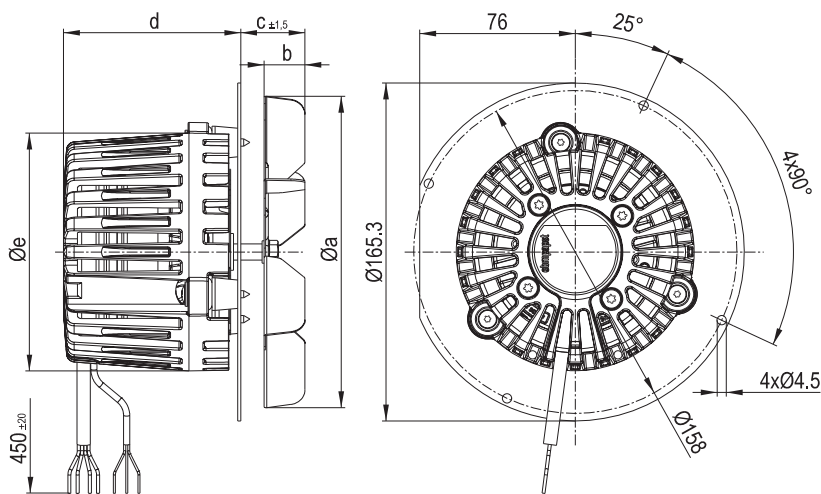

**Connection:**

- 1 = L (blue)
- 2 = PE (green/yellow)
- 3 = N (black)
- 4 = GND (black)
- 5 = OUT (white)
- 6 = VCC (red)

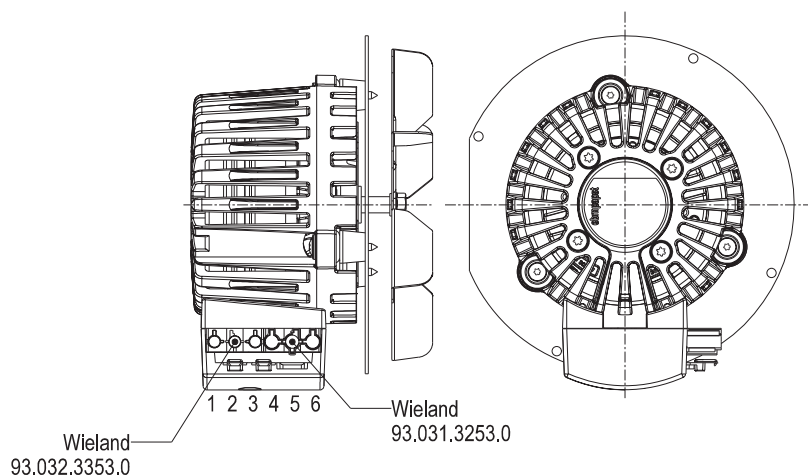

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 150




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
R2E 150-A091 -**	M2E 068-BF	Ⓐ	230	50	200	2400	32	0,15	1,0/400	---	-25..+55	1,7	A1), D)
R2E 150-AN91 -**		Ⓐ	230	50	200	2400	32	0,15	1,0/400	---	-25..+75	1,7	

subject to alterations


## Curves:

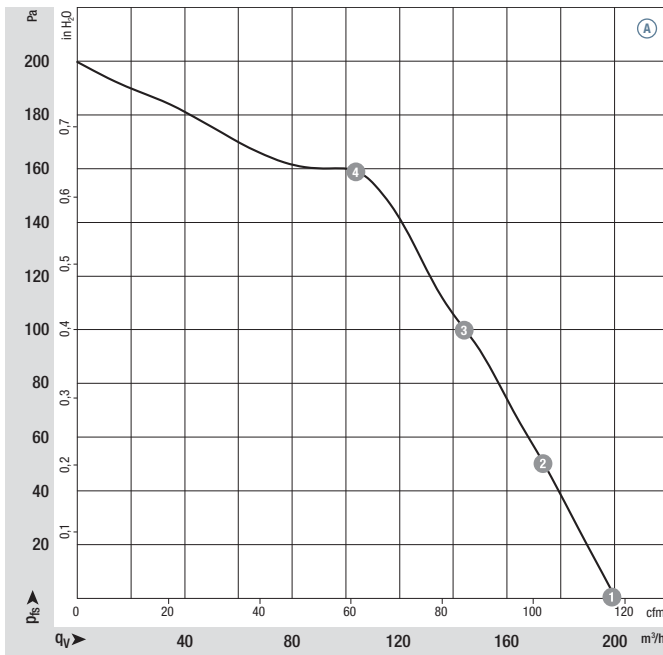

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2400	32	0,15	---
Ⓐ 2	2410	31	0,14	---
Ⓐ 3	2435	31	0,14	---
Ⓐ 4	2485	30	0,13	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

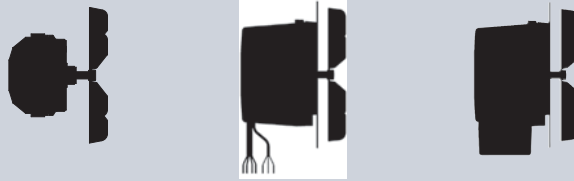

**Selection**


**Dimensions**

Type	without motor protection hood	Cable design	Plug design	a	b	c	d	e
R2E 150-A091 -**	---	R2E 150-A091 -01	R2E 150-A091 -05	152	20	31,5	87	116
R2E 150-AN91 -**	R2E 150-AN91 -01	---	---	---	---	---	---	---

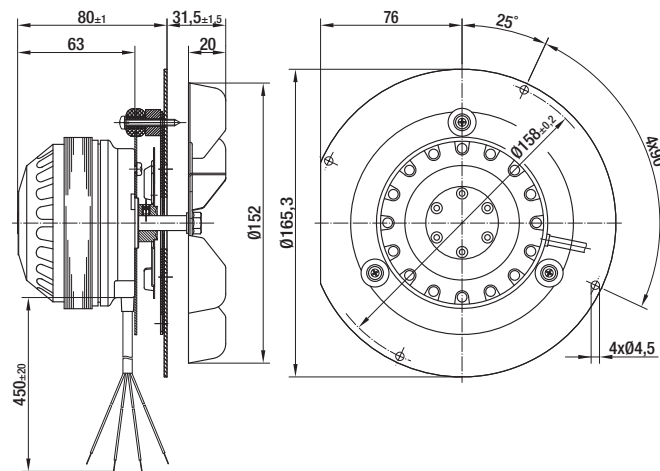

**Connection:**

- 1 = L (blue)
- 2 = PE (green/yellow)
- 3 = N (black)
- 4 = GND (black)
- 5 = OUT (white)
- 6 = VCC (red)

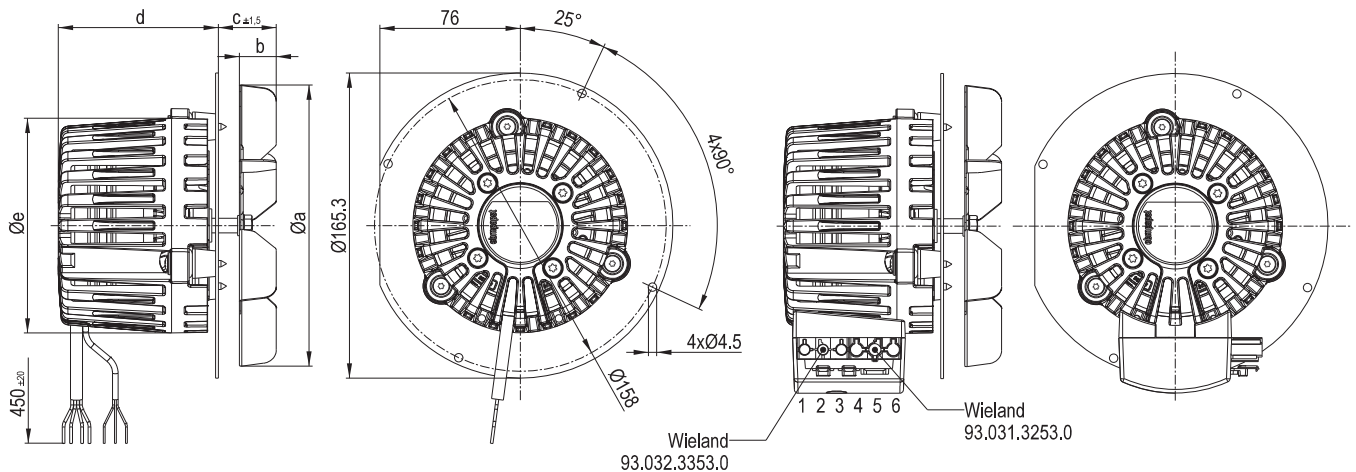



# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 150




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
R2E 150-AP82 -**	M2E 068-CF	Ⓐ	230	50	220	2750	44	0,27	1,0/400	---	-25..+40	1,8	A1), D)
R2E 150-AK82 -**		Ⓐ	230	50	220	2750	44	0,27	1,0/400	---	-25..+70	2,0	

subject to alterations


## Curves:

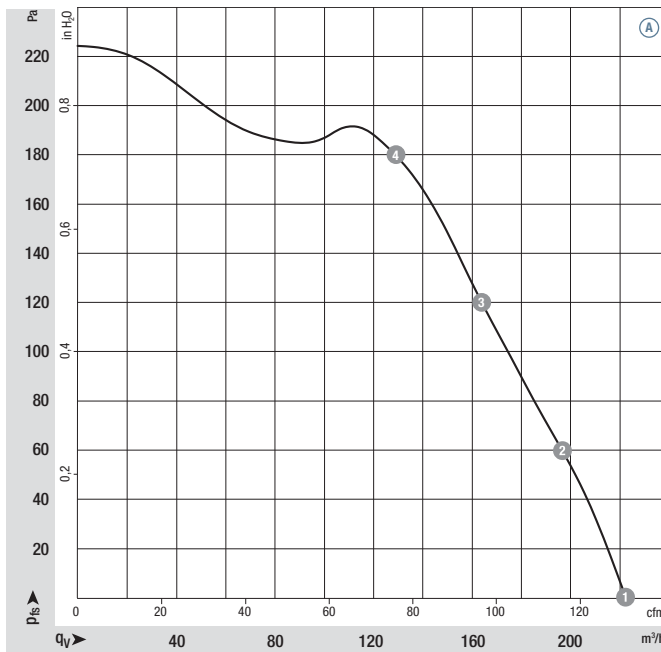

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2750	44	0,27	---
Ⓐ 2	2760	44	0,27	---
Ⓐ 3	2770	43	0,26	---
Ⓐ 4	2795	41	0,26	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

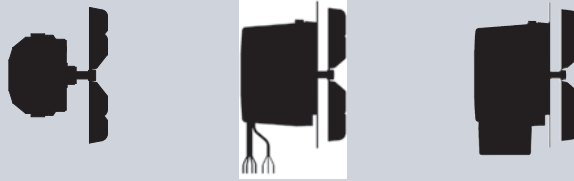

**Selection**


**Dimensions**

Type	without motor protection hood	Cable design	Plug design	a	b	c	d	e
R2E 150-AP82 -**	---	R2E 150-AP82 -01	R2E 150-AP82 -05	148	42	53,5	108	119
R2E 150-AK82 -**	R2E 150-AK82 -01	---	---	---	---	---	---	---

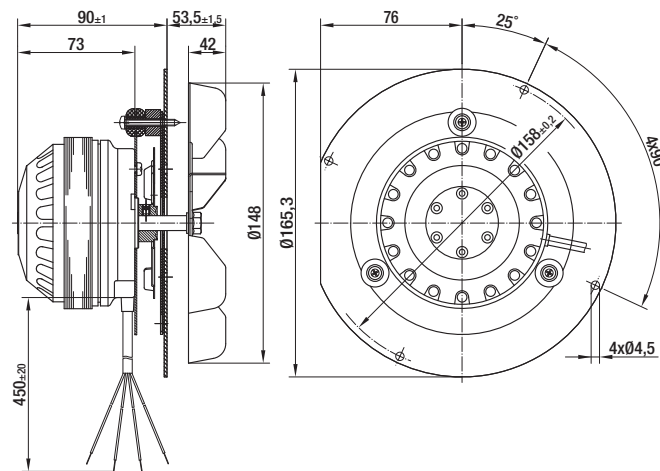

**Connection:**

- 1 = L (blue)
- 2 = PE (green/yellow)
- 3 = N (black)
- 4 = GND (black)
- 5 = OUT (white)
- 6 = VCC (red)

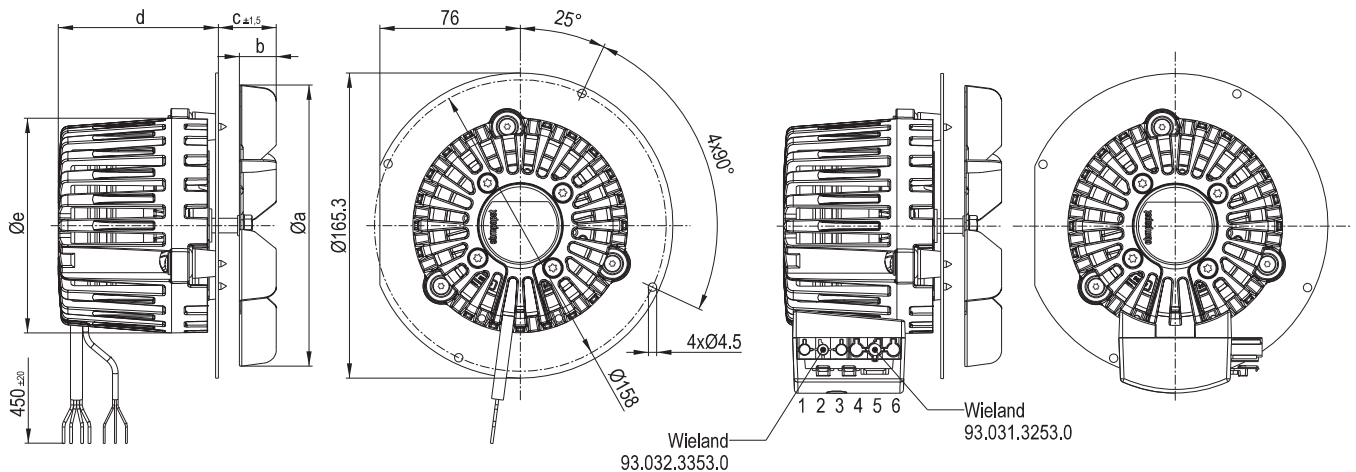

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, special designs, Ø 150/160




- **Material:** Impeller: sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Zul. Umgeb.temp. (1)	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/V/DB	dB(A)	°C	kg	p. 98, 99	
<b>R2E 160-BG34 -**</b>	M2E 068-DF	Ⓐ	230	50	285	2730	63	0,28	1,5/400	64	-25..+90	3,8	A1), D)
<b>R2E 150-AL06 -**</b>	M2E 074-DF	Ⓑ	230	50	460	2720	107	0,50	3,0/400	67	-25..+85	4,0	

subject to alterations


## Curves:

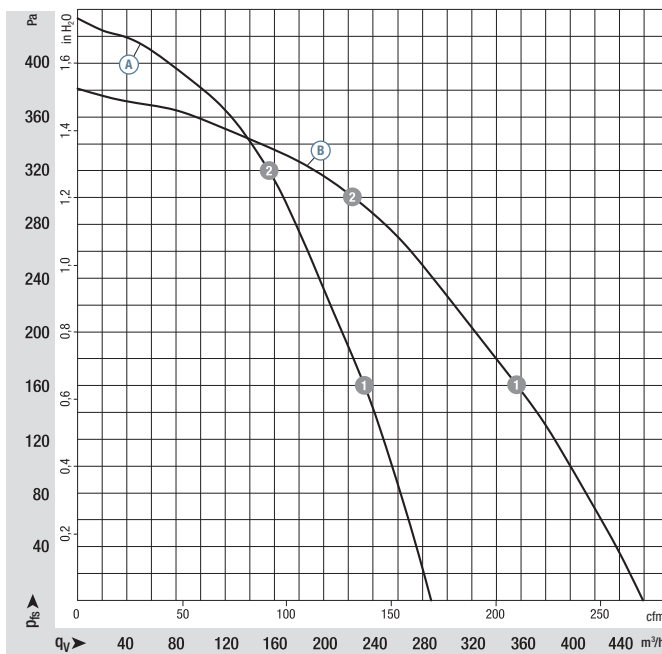

Air performance measured as per: ISO 5801, Installation category A, with scroll housing without protection against accidental contact. Suction-side noise levels: LwA as per ISO 13347, LpA measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2780	57	0,26	---
Ⓐ 2	2830	48	0,22	---
Ⓑ 1	2785	78	0,35	---
Ⓑ 2	2840	65	0,30	---



- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

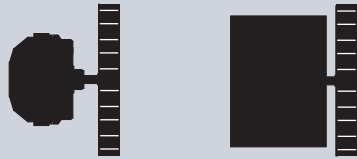

**Selection**

**Dimensions**

Type	without motor protection hood	with motor protection hood	a	b	d	e	f	g	h
R2E 160-BG34 -**	R2E 160-BG34 -01	R2E 160-BG34 -05	50	40	160	103	83	132	109
R2E 150-AL06 -**	R2E 150-AL06 -01	R2E 150-AL06 -05	84	74	150	135	110	144	146

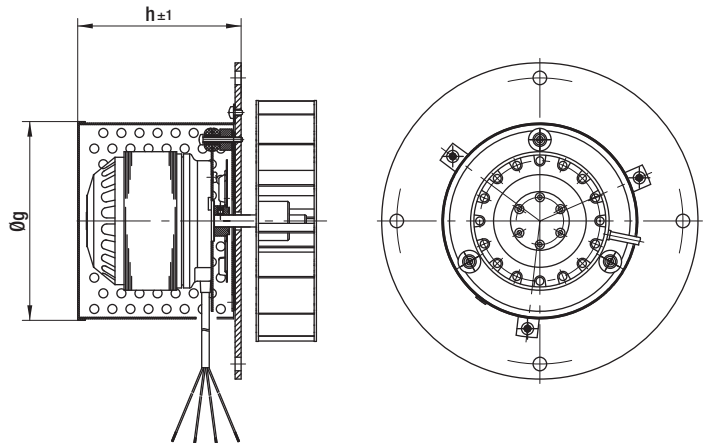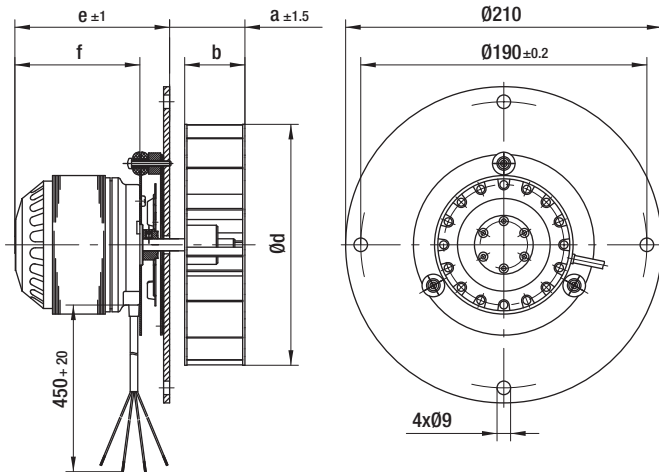

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 160




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
R2E 160-BL32 -**	M2E 068-CF	Ⓐ 230	50	310	2700	---	---	1,0/400	---	-25..+45	1,8	A1), D)	

subject to alterations

Curves:

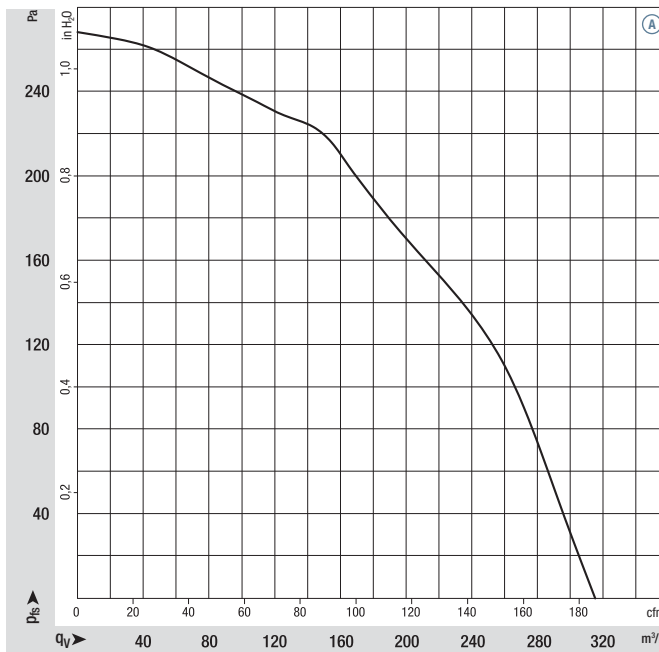

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.



- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Optional:** also possible, without protection hood
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**



**Dimensions**

Type	Cable design	Plug design	a	b	c	d	e
R2E 160-BL32 -**	R2E 160-BL32 -01	R2E 160-BL32 -05	160	40	49,5	108	119

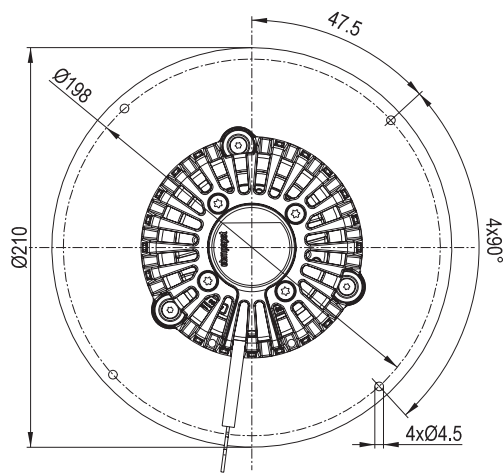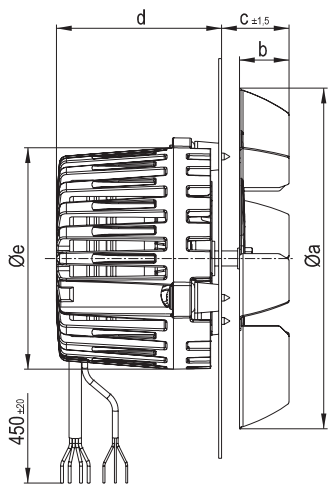

**Connection:**

- 1 = L (blue)
- 2 = PE (green/yellow)
- 3 = N (black)
- 4 = GND (black)
- 5 = OUT (white)
- 6 = VCC (red)

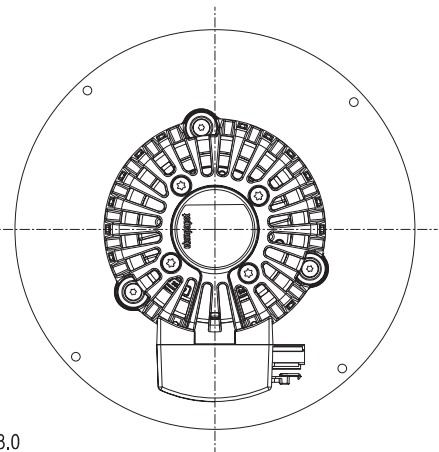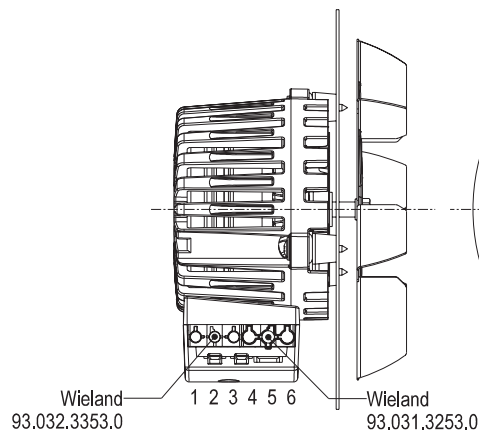

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 180




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
R2E 180-CT91 -**	M2E 068-BF	Ⓐ	230	50	255	1850	38	0,18	1,0/400	---	-25..+60	1,7	A1), D)
R2E 180-CF91 -**		Ⓐ	230	50	255	1850	38	0,18	1,0/400	---	-25..+85	1,9	

subject to alterations


## Curves:

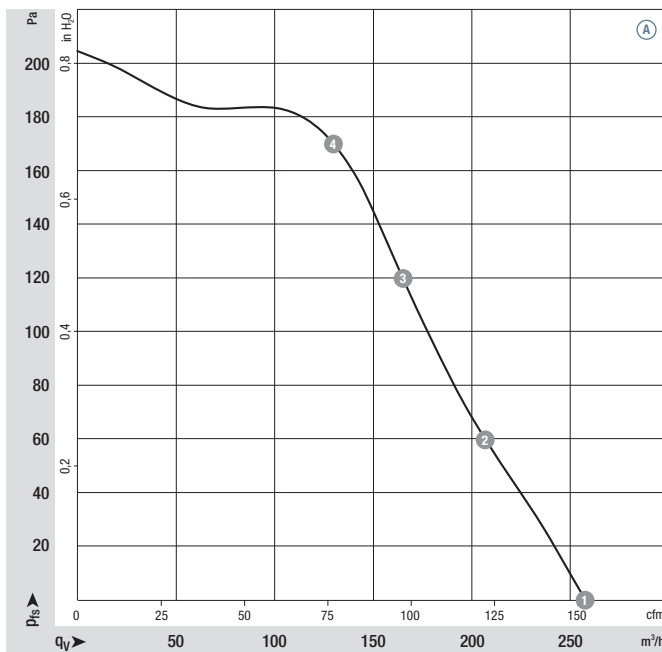

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	1850	38	0,18	---
Ⓐ 2	1840	38	0,16	---
Ⓐ 3	1940	37	0,16	---
Ⓐ 4	2110	35	0,15	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

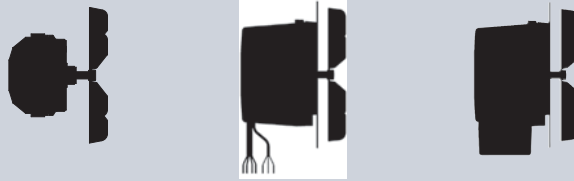

**Selection**


**Dimensions**

Type	without motor protection hood	Cable design	Plug design	a	b	c	d	e
R2E 180-CT91 -**	---	R2E 180-CT91 -01	R2E 180-CT91 -05	180	26	44,5	108	119
R2E 180-CF91 -**	R2E 180-CF91 -01	---	---	---	---	---	---	---

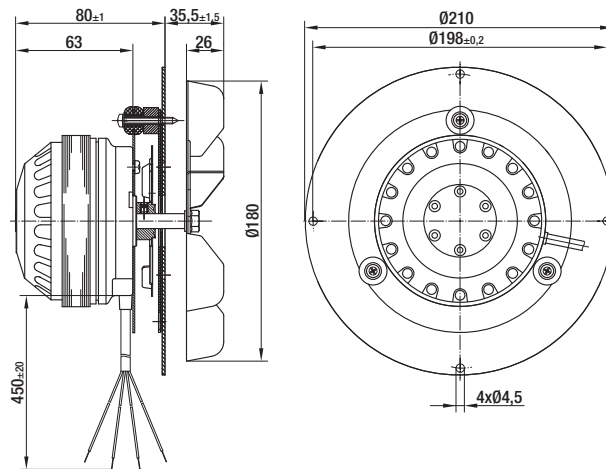

**Connection:**

- 1 = L (blue)
- 2 = PE (green/yellow)
- 3 = N (black)
- 4 = GND (black)
- 5 = OUT (white)
- 6 = VCC (red)

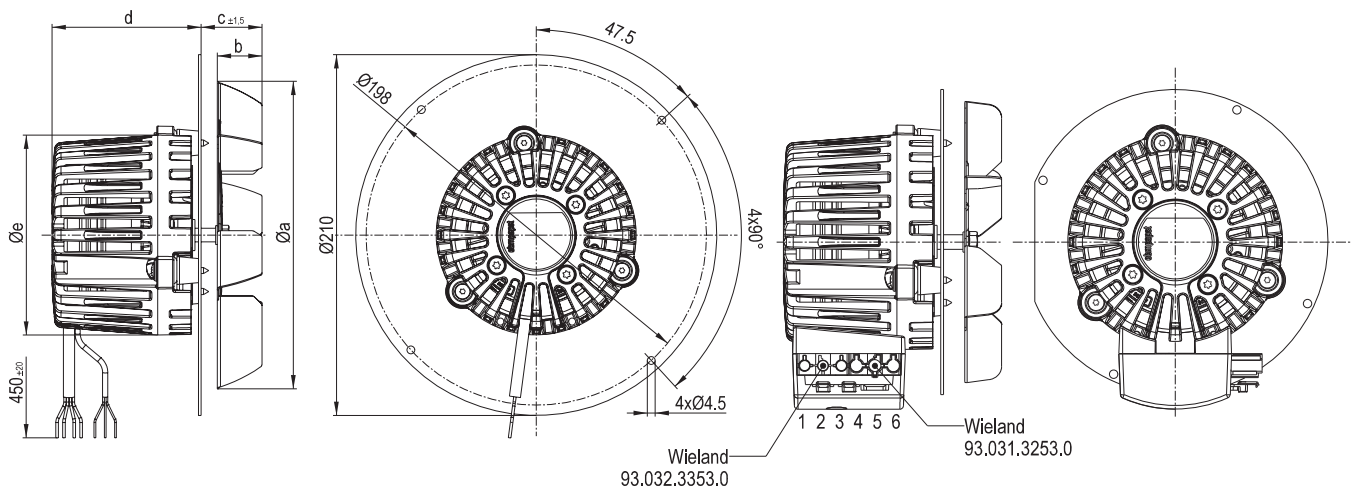



# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 180




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
R2E 180-CV82 -**	M2E 068-CF	Ⓐ	230	50	420	2500	75	0,34	2,0/400	---	-25..+45	1,7	A1), D)
R2E 180-CG82 -**		Ⓐ	230	50	420	2500	75	0,34	2,0/400	---	-25..+60	2,3	

subject to alterations


## Curves:

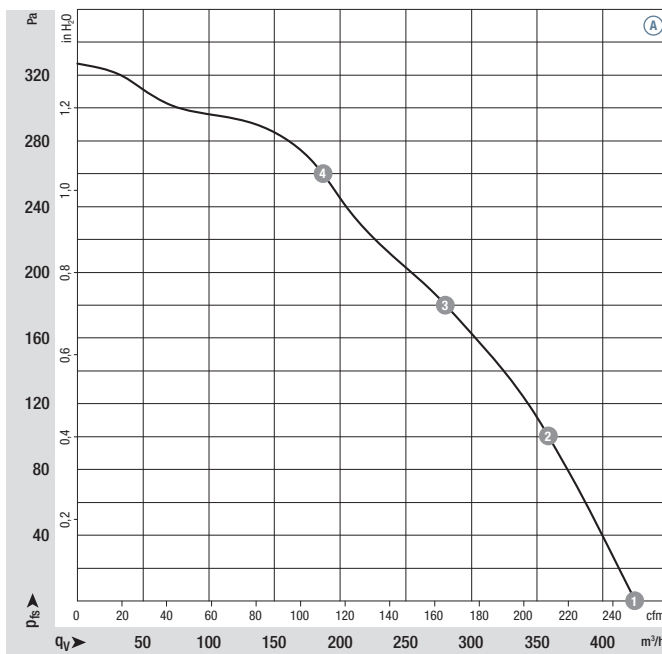

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2500	75	0,34	---
Ⓐ 2	2490	74	0,33	---
Ⓐ 3	2520	72	0,32	---
Ⓐ 4	2585	67	0,30	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.


- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

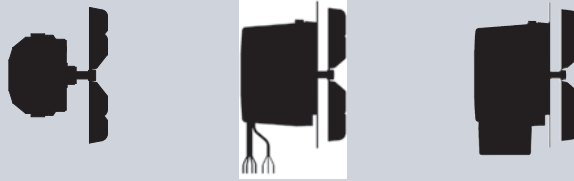

**Selection**


**Dimensions**

Type	without motor protection hood	Cable design	Plug design	a	b	c	d	e
R2E 180-CV82 -**	---	R2E 180-CV82 -01	R2E 180-CV82 -05	180	45	54,5	108	119
R2E 180-CG82 -**	R2E 180-CG82 -01	---	---	---	---	---	---	---

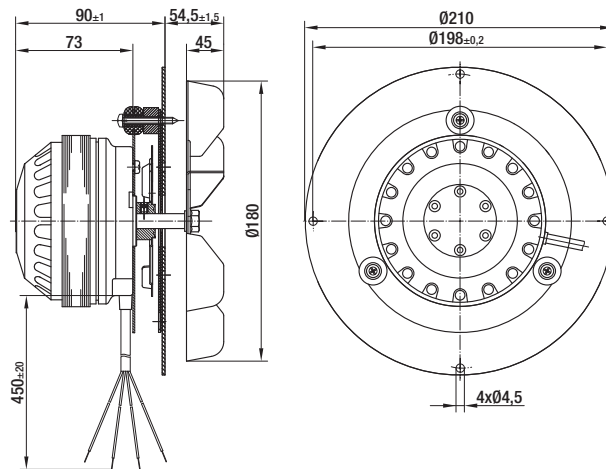

**Connection:**

- 1 = L (blue)
- 2 = PE (green/yellow)
- 3 = N (black)
- 4 = GND (black)
- 5 = OUT (white)
- 6 = VCC (red)

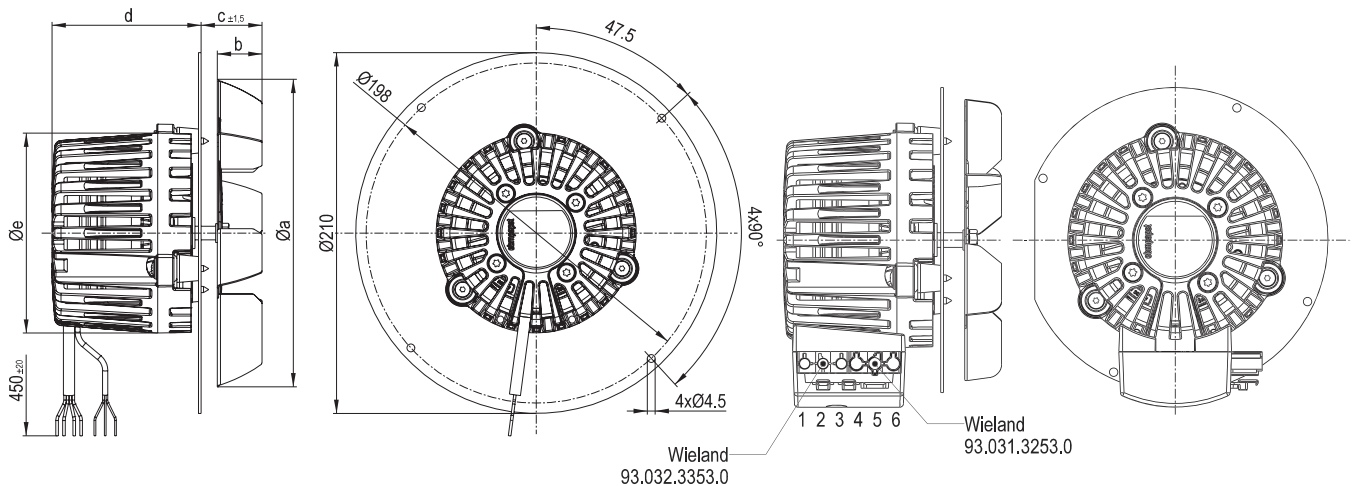

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 210




- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Zul. Umgeb.temp. (1)	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/V/DB	dB(A)	°C	kg	p. 98, 99	
R2E 210-AA34 -**	M2E 068-DF	Ⓐ	230	50	520	2500	110	0,49	2,0/450	---	-25..+90	2,9	A1), D)
R2E 210-AB34 -**		Ⓑ	230	50	600	2400	125	0,56	2,5/400	---	-25..+70	3,1	

subject to alterations

(1) measured with motor protection hood: Ⓐ = -25..+70°C, Ⓑ = -25..+45°C

## Curves:

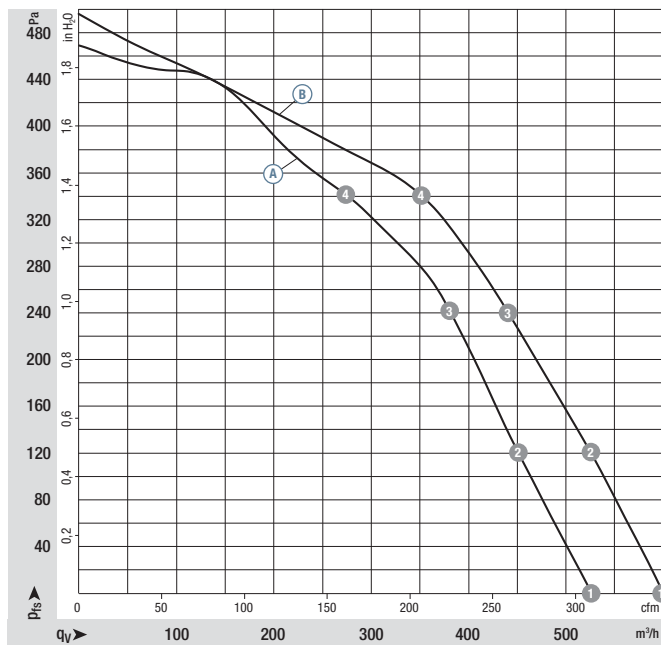

	n	P <sub>ed</sub>	I	L <sub>pA</sub>
	rpm	W	A	dB(A)
Ⓐ ①	2500	110	0,49	---
Ⓐ ②	2495	109	0,48	---
Ⓐ ③	2550	102	0,44	---
Ⓐ ④	2660	87	0,38	---
Ⓑ ①	2400	125	0,56	---
Ⓑ ②	2420	125	0,54	---
Ⓑ ③	2455	122	0,53	---
Ⓑ ④	2545	111	0,48	---

Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.





- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



**Selection**


**Dimensions**

Type	without motor protection hood	with motor protection hood	a	b
R2E 210-AA34 -**	R2E 210-AA34 -01	R2E 210-AA34 -05	39,5	30
R2E 210-AB34 -**	R2E 210-AB34 -01	R2E 210-AB34 -05	54,5	45

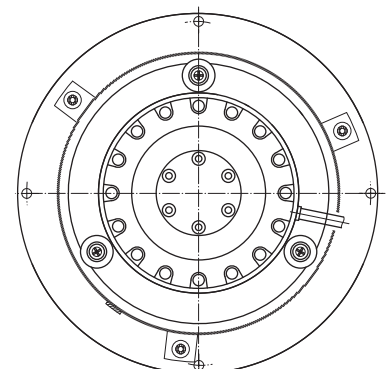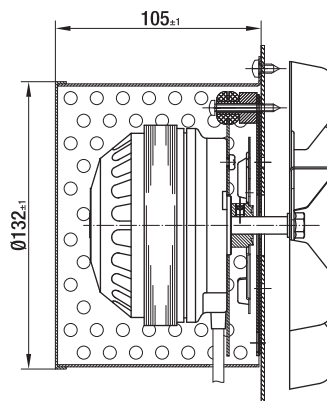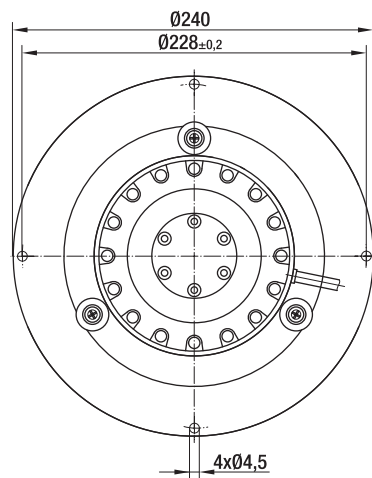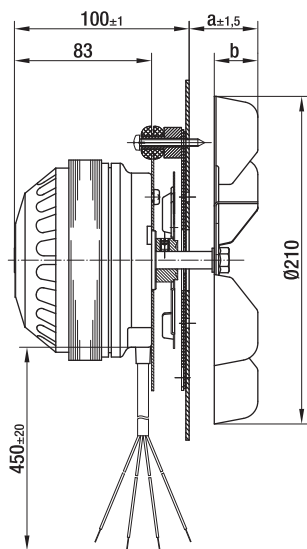

# AC centrifugal fans (exhaust air)

for solid fuel heating systems, single inlet, Ø 250

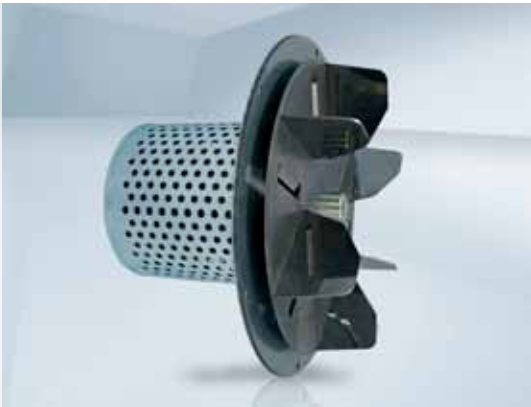


- **Material:** Impeller: Corrosion resistant sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44, depending on installation and position
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/V/DB	dB(A)	°C	kg	p. 98, 99	
R2E 250-BE03 -**	M2E 074-EI	Ⓐ	230	50	1010	2500	260	1,15	7,0/400	---	-25..+50	8,1	A1), D)

subject to alterations

Curves:

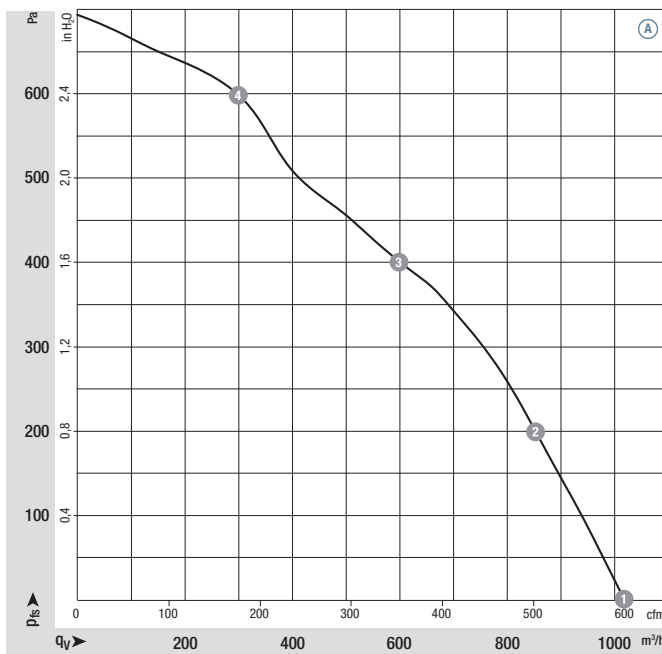

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2500	260	1,15	---
Ⓐ 2	2540	258	1,13	---
Ⓐ 3	2590	243	1,06	---
Ⓐ 4	2700	204	0,89	---


Air performance measured as per: ISO 5801, Installation category A, without scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)



### Selection

Type	with motor protection hood
R2E 250-BE03 -**	R2E 250-BE03 -10

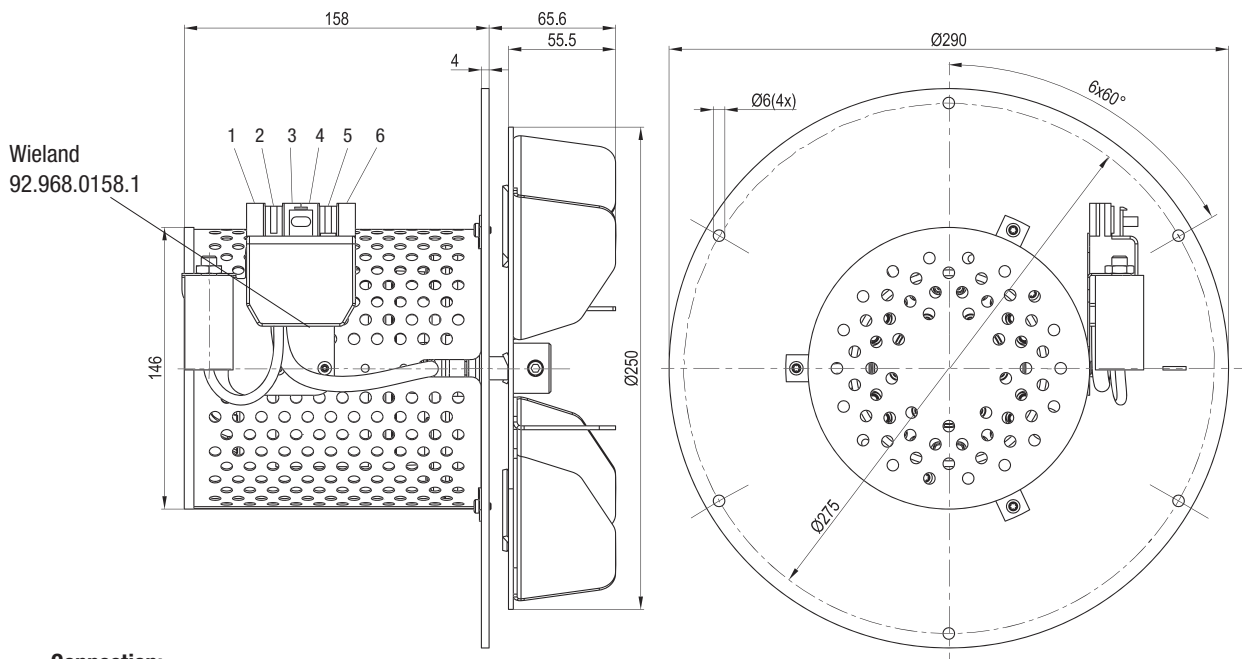

#### Connection:

- 1 = Hall-IC (black)
- 2 = Hall-IC (white)
- 3 = Hall-IC (red)
- 4 = black + capacitor
- 5 = green/yellow
- 6 = blue



## EC/AC centrifugal blowers (exhaust air)





# EC centrifugal blowers (exhaust air)

for solid fuel heating systems, single inlet, Ø 150




- **Material:** Impeller: Corrosion resistant sheet steel  
Housing: Hot-dip aluminised sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 96, 99	
<b>G3G 150-DA03 -**</b>	M3G 055-AI	Ⓐ 1~200-240	50/60	149	2535	16	0,17	66	-25..+60	2,0	H4), C)	

subject to alterations


## Curves:

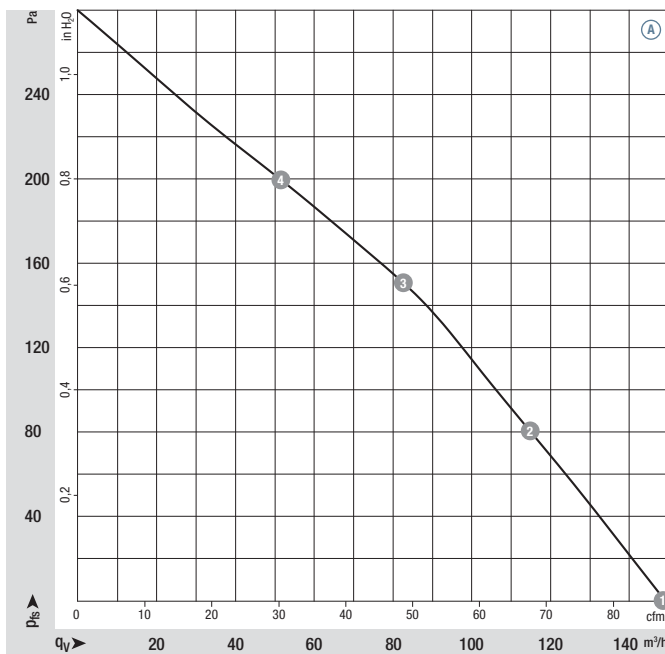

	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2535	16	0,17	---
Ⓐ 2	2545	16	0,17	---
Ⓐ 3	2585	15	0,16	---
Ⓐ 4	2635	14	0,16	---


Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:** See electrical connections p. 96
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

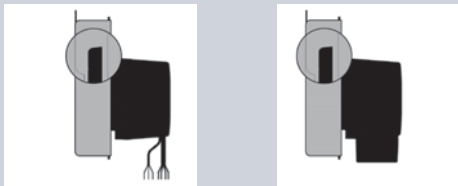

**Selection**

Type	Cable design	Plug design
G3G 150-DA03 -**	G3G 150-DA03 -01	G3G 150-DA03 -05

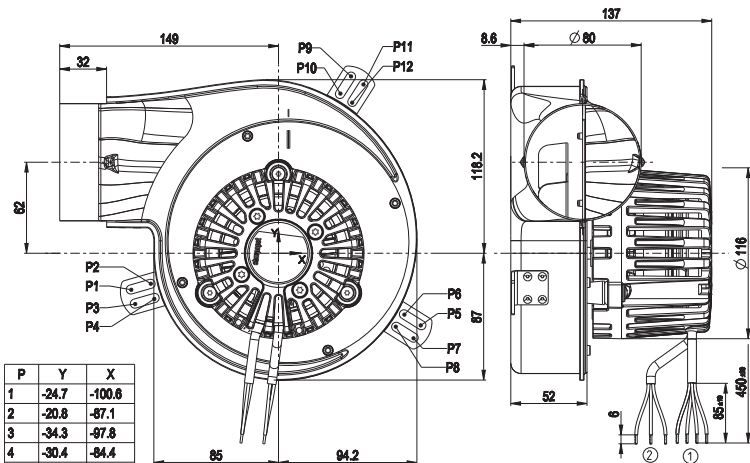


P	Y	X
1	-24.7	-100.6
2	-20.8	-87.1
3	-34.3	-87.8
4	-30.4	-84.4
5	-49.0	87.3
6	-41.6	85.4
7	-57.5	92.0
8	-50.1	80.1
9	120.3	49.4
10	108.5	41.9
11	114.9	57.8
12	103.1	50.3

**Connection Z:**

- 1 = N (blue)
- 2 = PE (green/yellow)
- 3 = L (black)
- 4 = 0-10V/PWM (yellow)
- 5 = GND (blue)
- 6 = Tacho (white)

P	Y	X
1	-24.7	-100.6
2	-20.8	-87.1
3	-34.3	-87.8
4	-30.4	-84.4
5	-49.0	87.3
6	-41.6	85.4
7	-57.5	92.0
8	-50.1	80.1
9	120.3	49.4
10	108.5	41.9
11	114.9	57.8
12	103.1	50.3

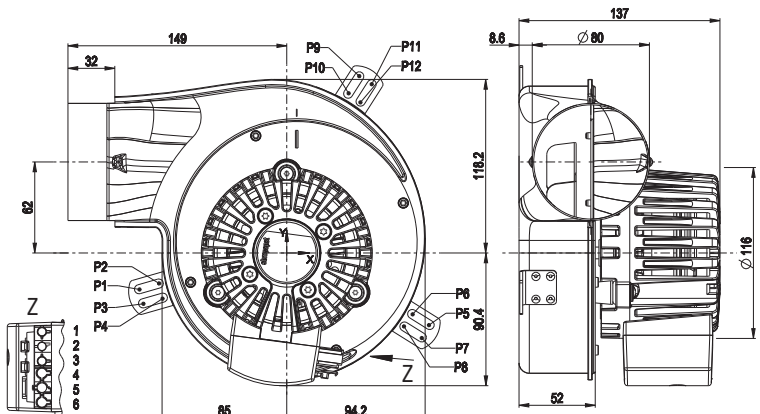

# EC centrifugal blowers (exhaust air)

for solid fuel heating systems, single inlet, Ø 180




- **Material:** Impeller: Corrosion resistant sheet steel  
Housing: Hot-dip aluminised sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 54
- **Insulation class:** "B"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 96, 99	
G3G 180-FJ11 -**	M3G 055-CF	Ⓐ 1~200-240	50/60	340	2690	55	0,50	74	-25..+60	2,9	H4), C)	
G3G 180-GJ11 -**												

subject to alterations


## Curves:

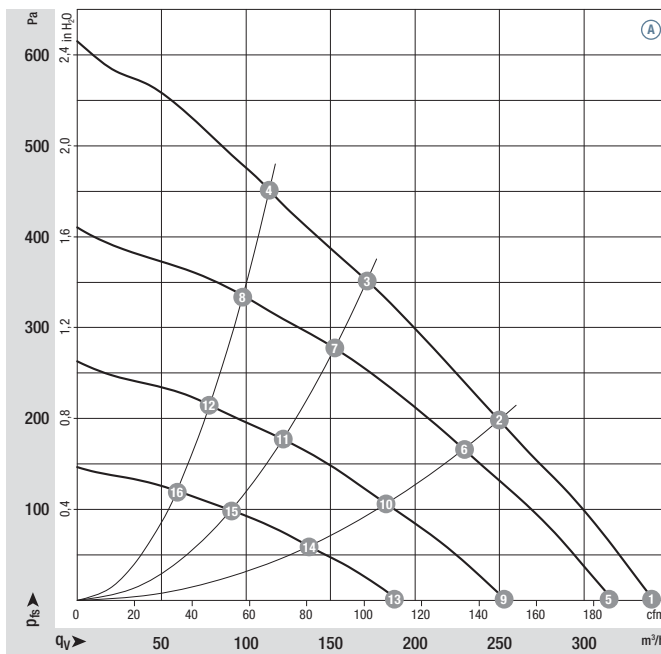


	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ 1	2690	55	0,50	74
Ⓐ 2	2725	52	0,48	70
Ⓐ 3	2810	46	0,44	66
Ⓐ 4	2895	39	0,38	64
Ⓐ 5	2500	44	0,40	72
Ⓐ 6	2500	40	0,37	67
Ⓐ 7	2500	32	0,31	63
Ⓐ 8	2500	25	0,25	61
Ⓐ 9	2000	22	0,21	66
Ⓐ 10	2000	20	0,19	62
Ⓐ 11	2000	16	0,16	57
Ⓐ 12	2000	13	0,13	55
Ⓐ 13	1500	9	0,09	59
Ⓐ 14	1500	9	0,08	55
Ⓐ 15	1500	7	0,07	50
Ⓐ 16	1500	5	0,05	48

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>WA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Technical features:** See electrical connections p. 96
- **EMC:** Interference emission acc. EN 61000-6-3  
Interference immunity acc. EN 61000-6-2  
Harmonics acc. EN 61000-3-2/3
- **Touch current:** < 3,5 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Cable exit:** Variable
- **Protection class:** I (if customer has provided connection for protective earth)
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** VDE, UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

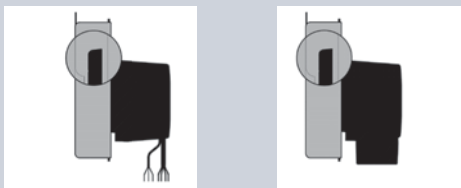Selection			Dimensions
Type	Cable design	Plug design	a
G3G 180-FJ11 -**	G3G 180-FJ11 -01	G3G 180-FJ11 -05	186
G3G 180-GJ11 -**	G3G 180-GJ11 -01	G3G 180-GJ11 -05	223

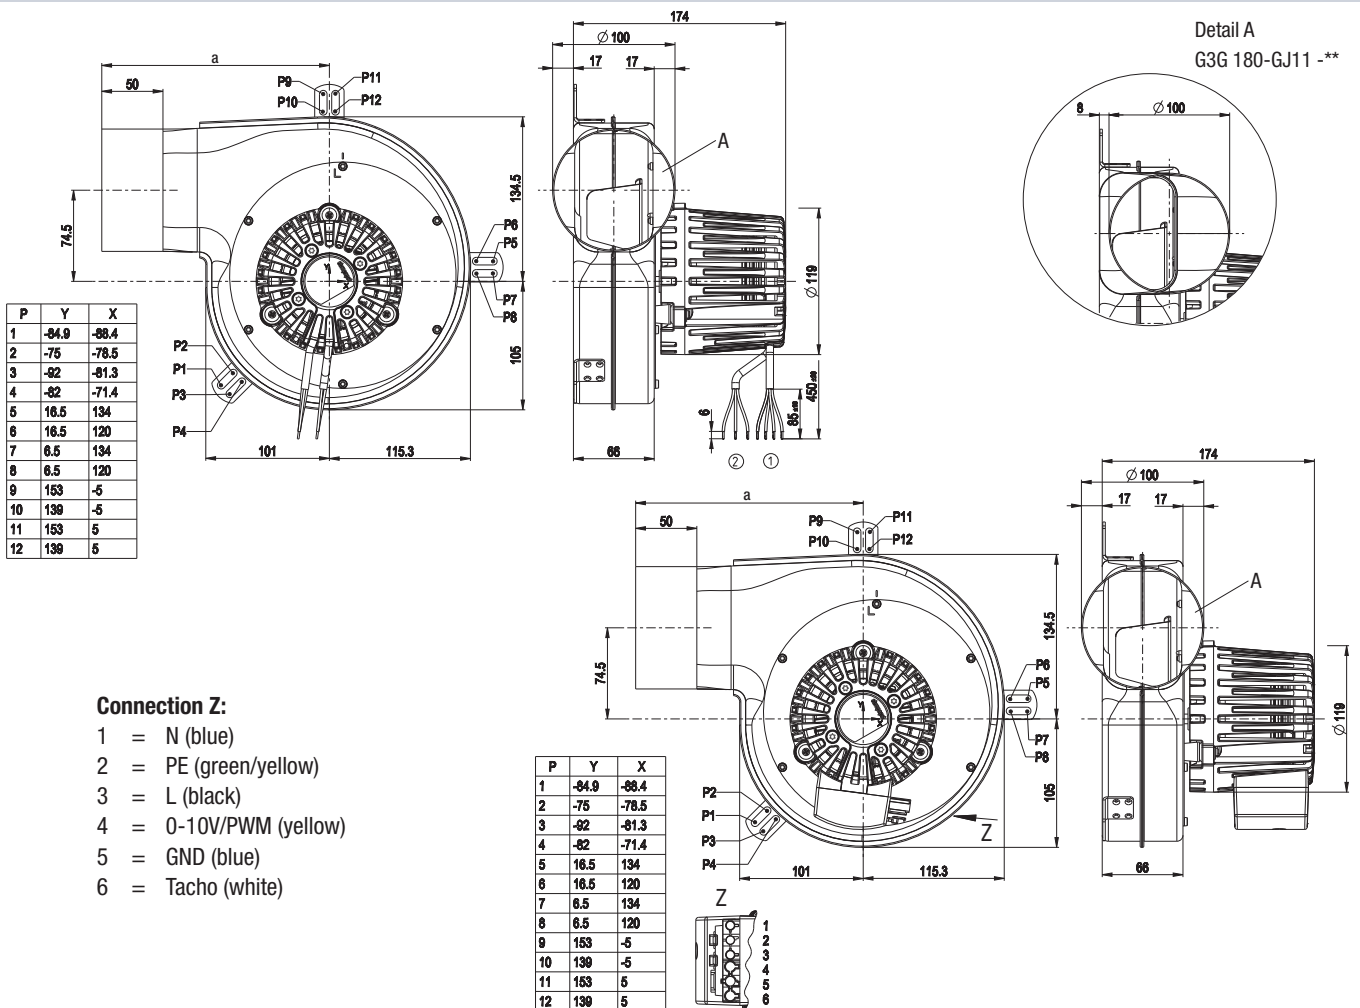

# AC centrifugal blowers (exhaust air)

for solid fuel heating systems, single inlet, Ø 150




- **Material:** Impeller: Corrosion resistant sheet steel  
Housing: Hot-dip aluminised sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
G2E 150-D091 -**	M2E 068-BF	Ⓐ 230	50	145	2480	30	0,14	1,0/400	---	-25..+50	2,3	A1), D)	
G2E 150-DN91 -**	M2E 068-BF	Ⓐ 230	50	145	2480	30	0,14	1,0/400	---	-25..+70	2,3	A1), D)	

subject to alterations




## Curves:

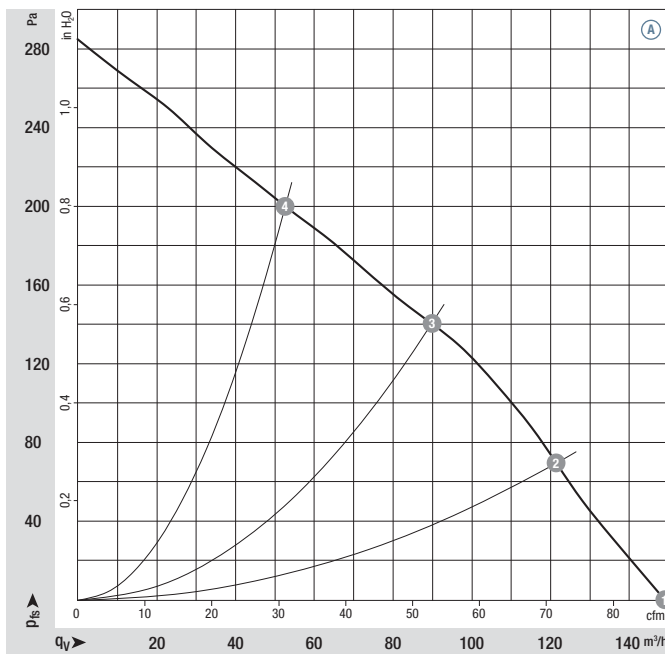


	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ ①	2480	30	0,14	---
Ⓐ ②	2505	30	0,13	---
Ⓐ ③	2560	29	0,13	---
Ⓐ ④	2620	28	0,12	---

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

Selection			
Type	Cable design	Plug design	Cable design without protection hood
G2E 150-D091 -**	G2E 150-D091 -01	G2E 150-D091 -05	---
G2E 150-DN91 -**	---	---	G2E 150-DN91 -01

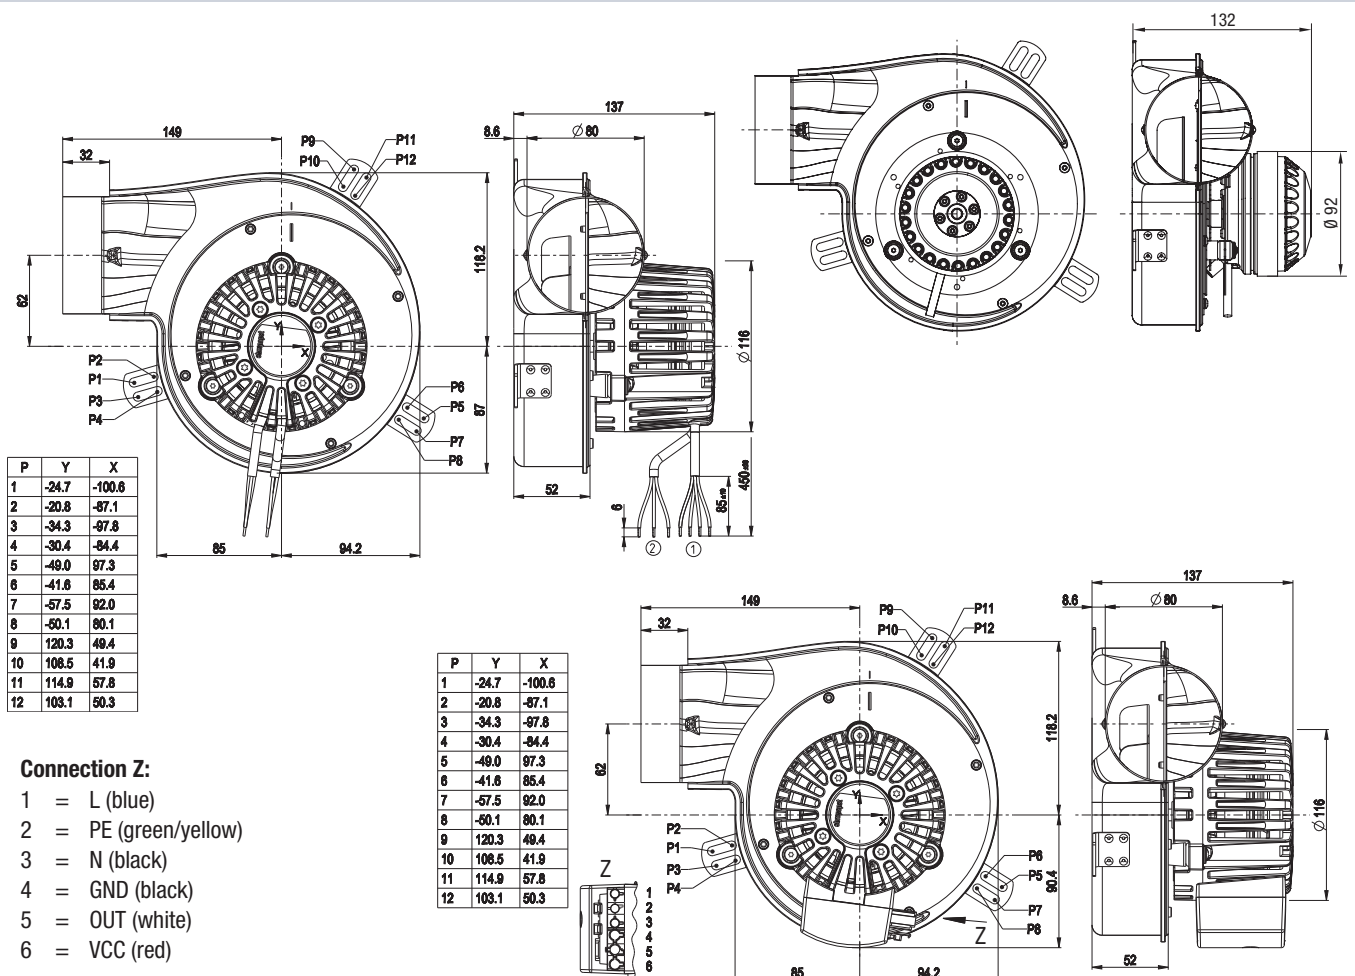

# AC centrifugal blowers (exhaust air)

for solid fuel heating systems, single inlet, Ø 152




- **Material:** Impeller: Corrosion resistant sheet steel  
Housing: Hot-dip aluminised sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 00
- **Insulation class:** "H"
- **Mounting position:** Any, except motor overhead
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Ball bearings / sleeve bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

## Nominal data

Type	Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	dB(A)	°C	kg	p. 98	
G2E 152 / 0020-3030	Ⓐ	230	50	160	2600	43	0,38	---	-25..+70	2,3	B)

subject to alterations


## Curves:

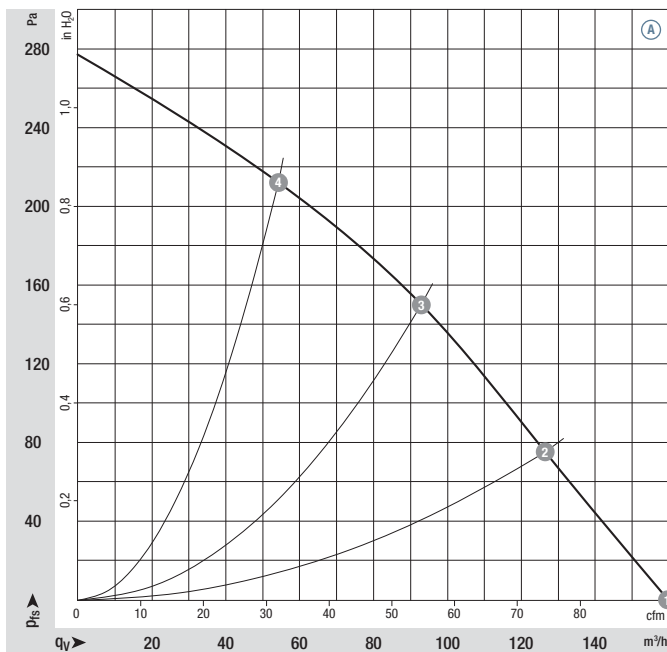

	n	P <sub>ed</sub>	I	L <sub>pA</sub>
	rpm	W	A	dB(A)
Ⓐ 1	2600	43	0,38	---
Ⓐ 2	2630	43	0,37	---
Ⓐ 3	2660	42	0,37	---
Ⓐ 4	2700	39	0,35	---

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Standard:** Speed monitoring via Hall IC
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** CCC, GOST are applied for; UL, CSA on request
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

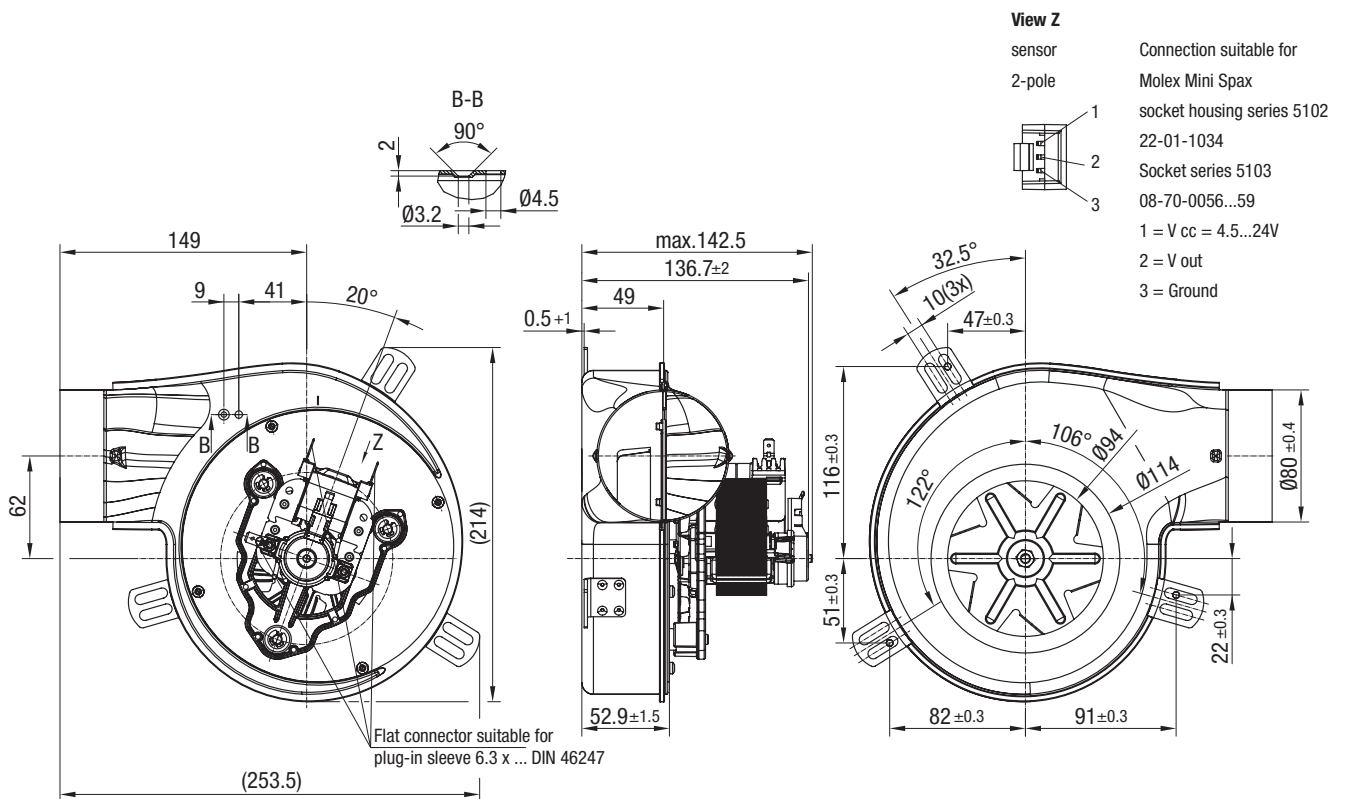



# AC centrifugal blowers (exhaust air)

for solid fuel heating systems, single inlet, Ø 180




- **Material:** Impeller: Corrosion resistant sheet steel  
Housing: Hot-dip aluminised sheet steel
- **Direction of rotation:** Clockwise, seen on impeller
- **Type of protection:** IP 44
- **Insulation class:** "F"
- **Mounting position:** Any
- **Condensate discharges:** None, open rotor
- **Mode of operation:** Continuous operation (S1)
- **Bearings:** Maintenance-free ball bearings
- **Max. exhaust gas temperature:** Continuous operation 250°C

Nominal data		Curve	Nominal voltage	Frequency	Air flow	Speed/rpm	Max. input power	Max. current draw	Capacitor	Sound pressure level	Perm. amb. temp.	Mass	Electr. connection
Type	Motor	VAC	Hz	m <sup>3</sup> /h	rpm	W	A	µF/VDB	dB(A)	°C	kg	p. 98, 99	
G2E 180-CV82 -**	M2E 068-CF	A	230	50	340	2600	65	0,30	1,0/400	73	-25..+60	3,0	A1), D)
G2E 180-GV82 -**													

subject to alterations


Curves:

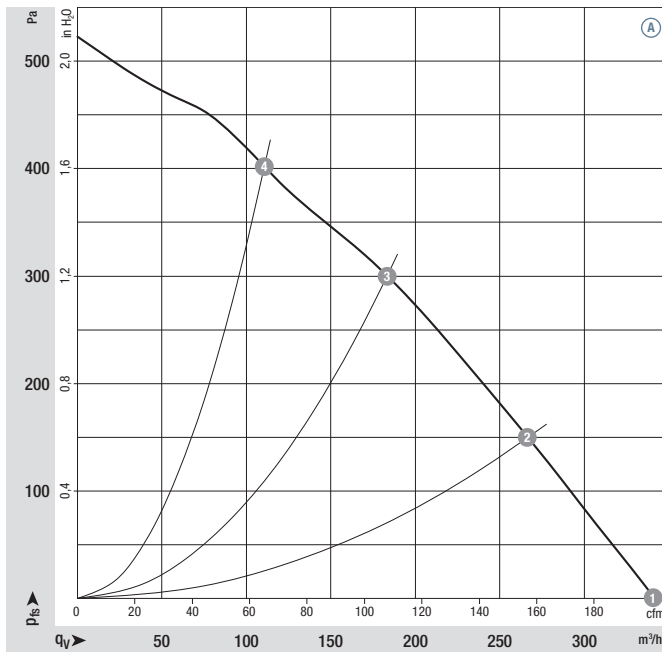


	n rpm	P <sub>ed</sub> W	I A	L <sub>pA</sub> dB(A)
Ⓐ ①	2600	65	0,30	73
Ⓐ ②	2645	60	0,26	70
Ⓐ ③	2700	55	0,24	64
Ⓐ ④	2765	48	0,21	62

Air performance measured as per: ISO 5801, Installation category A, with ebm-papst scroll housing without protection against accidental contact. Suction-side noise levels: L<sub>wA</sub> as per ISO 13347, L<sub>pA</sub> measured at 1 m distance to fan axis. The acoustic values given are only valid under the measurement conditions listed and may vary depending on the installation situation. With any deviation to the standard setup, the specific values have to be checked and reviewed once installed or fitted! For detailed information see page 100 ff.

- **Motor protection:** TOP wired internally
- **Touch current:** < 0,75 mA acc. to IEC 60990 (test circuit, illustration 4)
- **Standard:** Speed monitoring via Hall IC
- **Protection class:** I
- **Product conforming to standards:** EN 60335-1, CE
- **Approvals:** UL, CSA, CCC, GOST are applied for
- **Optional:** Additional shaft seal made from ceramic (see p. 94)

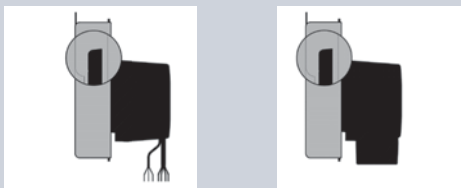Selection			Dimensions
Type	Cable design *	Plug design	a
G2E 180-CV82 -**	G2E 180-CV82 -01	G2E 180-CV82 -05	186
G2E 180-GV82 -**	G2E 180-GV82 -01	G2E 180-GV82 -05	223

\* Cable design also possible without protection hood

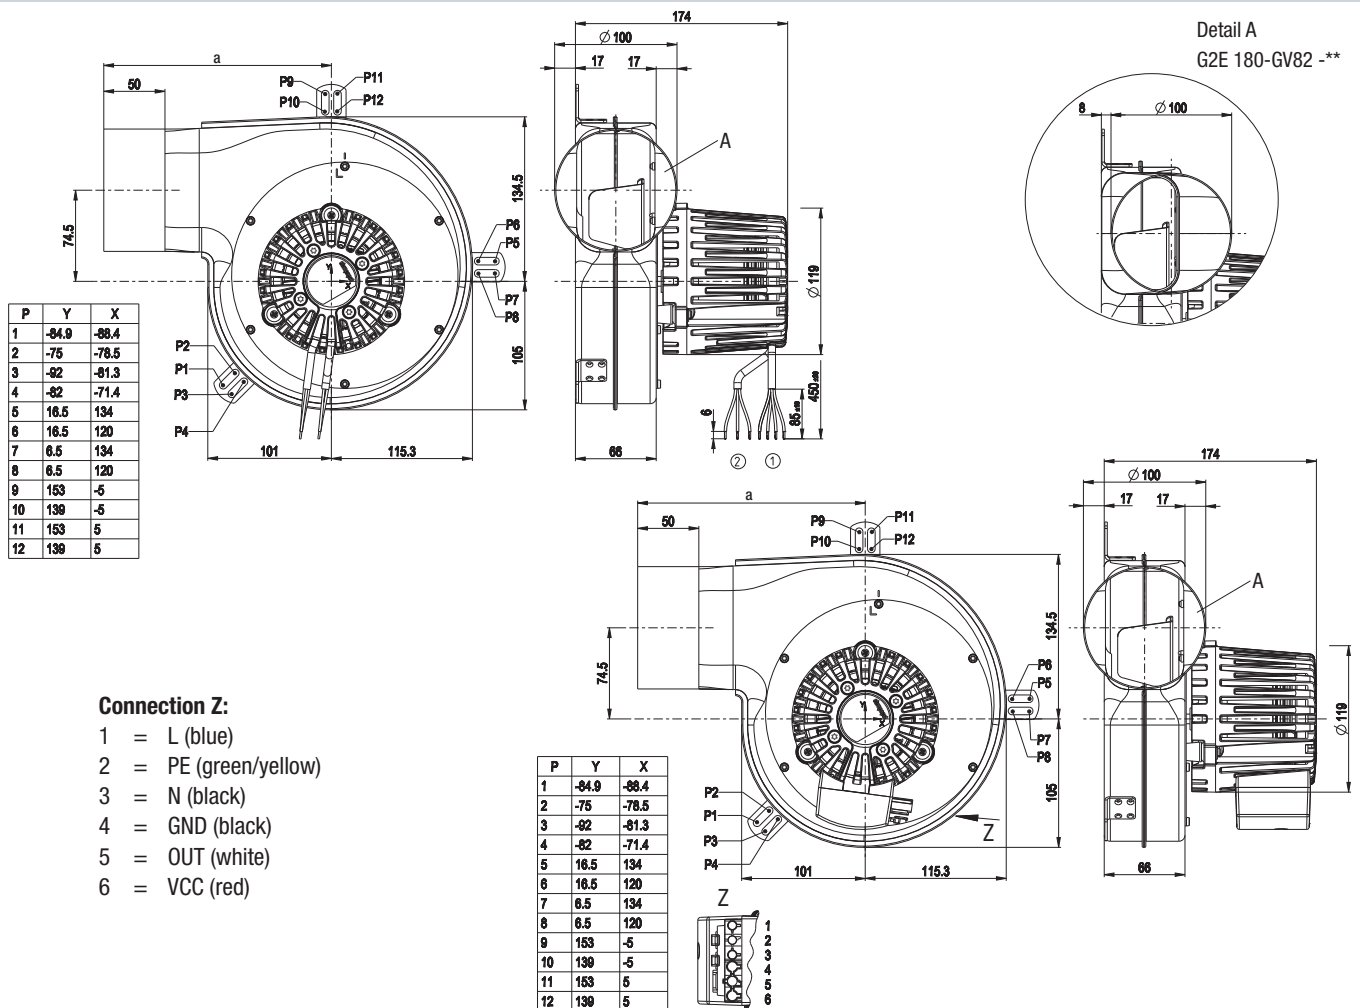



# Gear motors



# Shaded-pole motor EM 30


with Flatline 78



- **Spur gear unit:** Die-cast zinc housing
- **Max. permitted radial load:** 300 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Needle bearings
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature

Nominal data		Nominal voltage	Frequency	Reduction	Drive torque	Output speed	Output power	Nominal current	Mass	Length
Type	Motor	V	Hz	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	m (kg)	L (mm)
78.5.3030.F40	EM3030	230	50	408,4/5	7,4	6,37	4,9	0,46	1,1	87
78.5.3030.F41	EM3030	230	50	737,4/5	12,5	3,53	4,6	0,46	1,1	87
78.5.3020.F42	EM3020	230	50	976,0/5	11,9	2,66	3,3	0,15	0,9	77
78.5.3020.F43	EM3020	230	50	1266,1/5	13,0	2,05	2,8	0,15	0,9	77
78.5.3020.F44	EM3020	230	50	1648,6/5	14,0	1,58	2,3	0,15	0,9	77
78.5.3020.F45	EM3020	230	50	2135,9/5	15,0	1,22	1,9	0,15	0,9	77

Subject to alterations

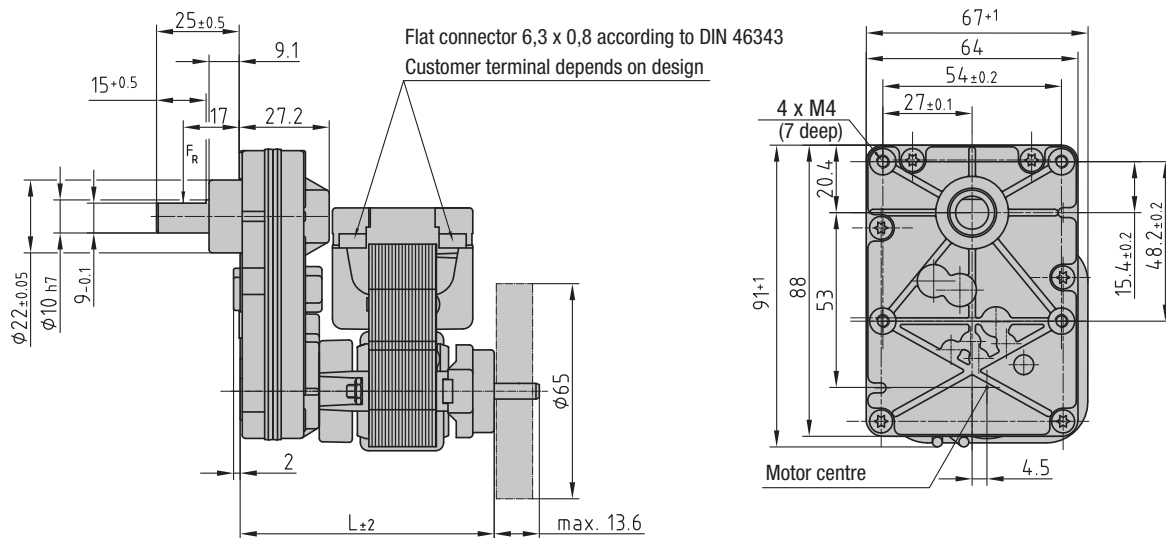

# Capacitor motor KM 40


with Compactline 92



- **Spur gear unit:** Die-cast zinc housing
- **Max. permitted radial load:** 150 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Slide/needle bearings
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature

Nominal data		Nominal voltage	Frequency	Reduction	Drive torque	Output speed	Output power	Nominal current	Capacitor	Mass	Length
Type	Motor	V	Hz	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	µF/V	m (kg)	L (mm)
92.3.4050.2.C06	KM4050-2	230	50	55,0/3	10,0	50,0	52	0,68	5,0/400	2,1	153
92.3.4050.2.C07	KM4050-2	230	50	70,4/3	12,8	39,1	52	0,68	5,0/400	2,1	153
92.3.4050.2.C08	KM4050-2	230	50	92,3/3	15,0	29,8	47	0,68	5,0/400	2,1	153
92.3.4030.2.C09	KM4030-2	230	50	142,0/3	14,4	19,4	29	0,38	3,5/400	1,6	133
92.3.4030.2.C10	KM4030-2	230	50	184,4/3	15,0	14,9	23	0,38	3,5/400	1,6	133
92.3.4030.2.C11	KM4030-2	230	50	274,6/3	15,0	10,0	16	0,38	3,5/400	1,6	133
92.3.4030.4.C12	KM4030-4	230	50	142,0/3	12,9	9,15	12	0,20	1,5/400	1,6	133
92.3.4030.4.C13	KM4030-4	230	50	184,4/3	15,0	7,05	11	0,20	1,5/400	1,6	133
92.3.4030.4.C14	KM4030-4	230	50	274,6/3	15,0	4,73	7,4	0,20	1,5/400	1,6	133

Subject to alterations

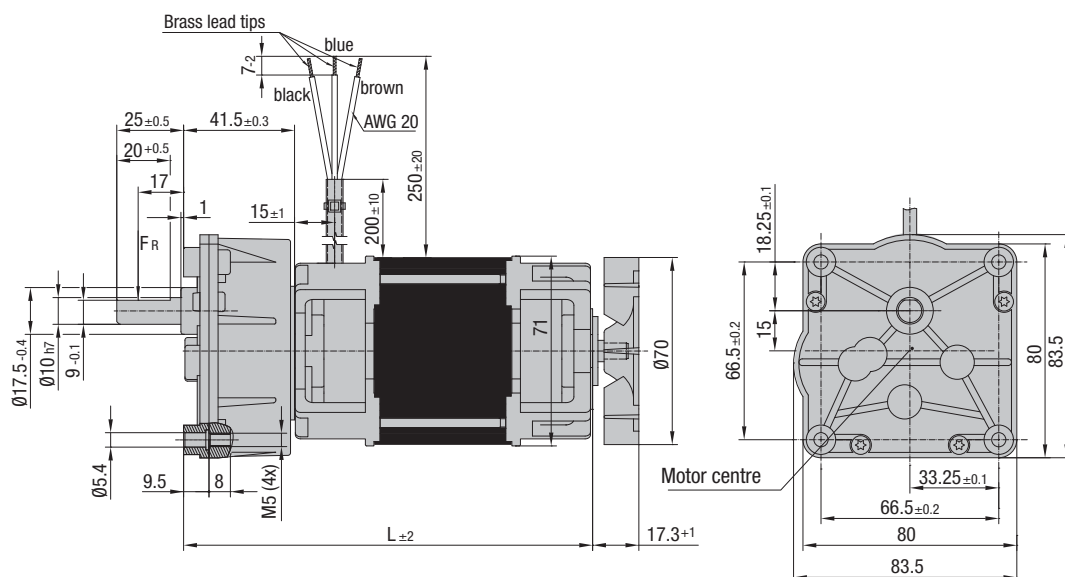

# Capacitor motor KM 40


with Flatline 85



- **Spur gear unit:** Die-cast zinc housing
- **Max. permitted radial load:** 150 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Needle bearings on both sides
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature

Nominal data		Nominal voltage	Frequency	Reduction	Drive torque	Output speed	Output power	Nominal current	Capacitor	Mass	Length
Type	Motor	V	Hz	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	μF/V	m (kg)	L (mm)
85.3.4050.2.F08	EM4050-2	230	50	136,5/3	24,9	20,1	52	0,68	5,0/400	2,1	139
85.3.4050.2.F09	EM4050-2	230	50	189,0/3	25,0	14,6	38	0,68	5,0/400	2,1	139
85.4.4030.F10	KM4030-2	230	50	303,6/4	27,7	9,06	26	0,38	3,5/400	1,7	119
85.4.4030.F11	KM4030-2	230	50	454,0/4	30,0	6,06	19	0,38	3,5/400	1,7	119
85.4.4030.F12	KM4030-2	230	50	687,0/4	30,0	4,00	13	0,38	3,5/400	1,7	119
85.5.4030.F13	KM4030-2	230	50	1028,7/4	30,0	2,67	8,4	0,38	3,5/400	1,7	119

Subject to alterations

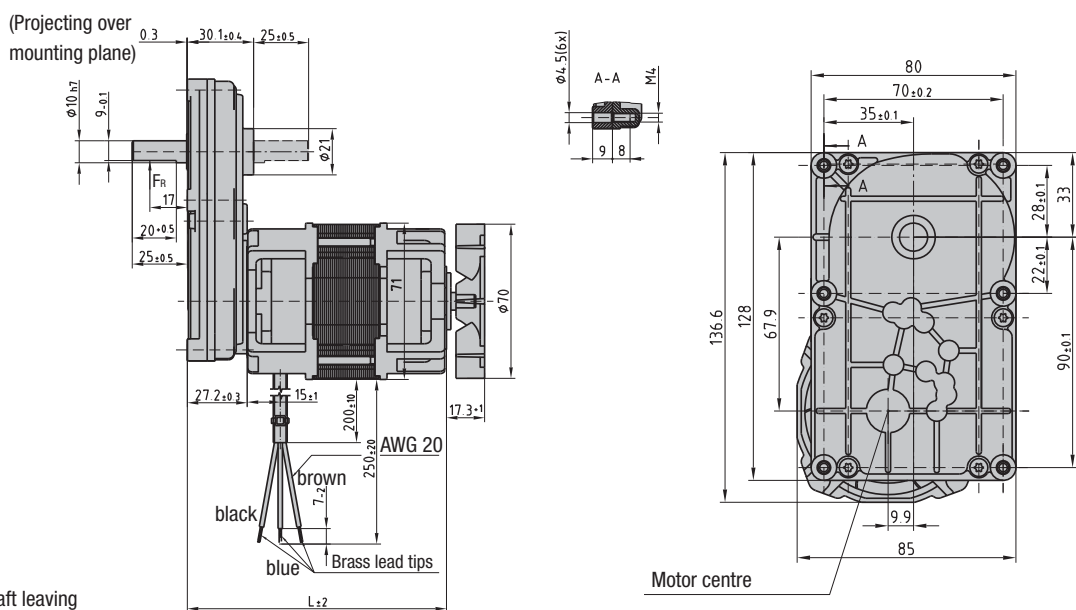

Alternative shaft leaving on motor-side on request order adding: W03

# EC motor VDC 3-49-15


with Flatline 85



- **Spur gear unit:** Die-cast zinc housing
- **Max. permitted radial load:** 150 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Needle bearings on both sides
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature

Nominal data		Nominal voltage	Reduction	Drive torque	Output speed	Output power	Nominal current	Mass	Length
Type	Motor	V	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	m (kg)	L (mm)
85.3.C4915.F01	VDC-3-49-15	24	8,2/3	0,9	488	46	3,5	1,4	88
85.3.C4915.F02	VDC-3-49-15	24	12,3/3	1,3	325	46	3,5	1,4	88
85.3.C4915.F03	VDC-3-49-15	24	27,6/3	3,0	145	46	3,5	1,4	88
85.3.C4915.F04	VDC-3-49-15	24	40,3/3	4,4	99,3	46	3,5	1,4	88
85.3.C4915.F05	VDC-3-49-15	24	64,0/3	7,0	62,5	46	3,5	1,4	88
85.3.C4915.F06	VDC-3-49-15	24	101,8/3	11,0	39,3	46	3,5	1,4	88
85.3.C4915.F07	VDC-3-49-15	24	136,5/3	15,0	29,3	46	3,5	1,4	88
85.3.C4915.F08	VDC-3-49-15	24	189,0/3	21,0	21,2	46	3,5	1,4	88

Subject to alterations

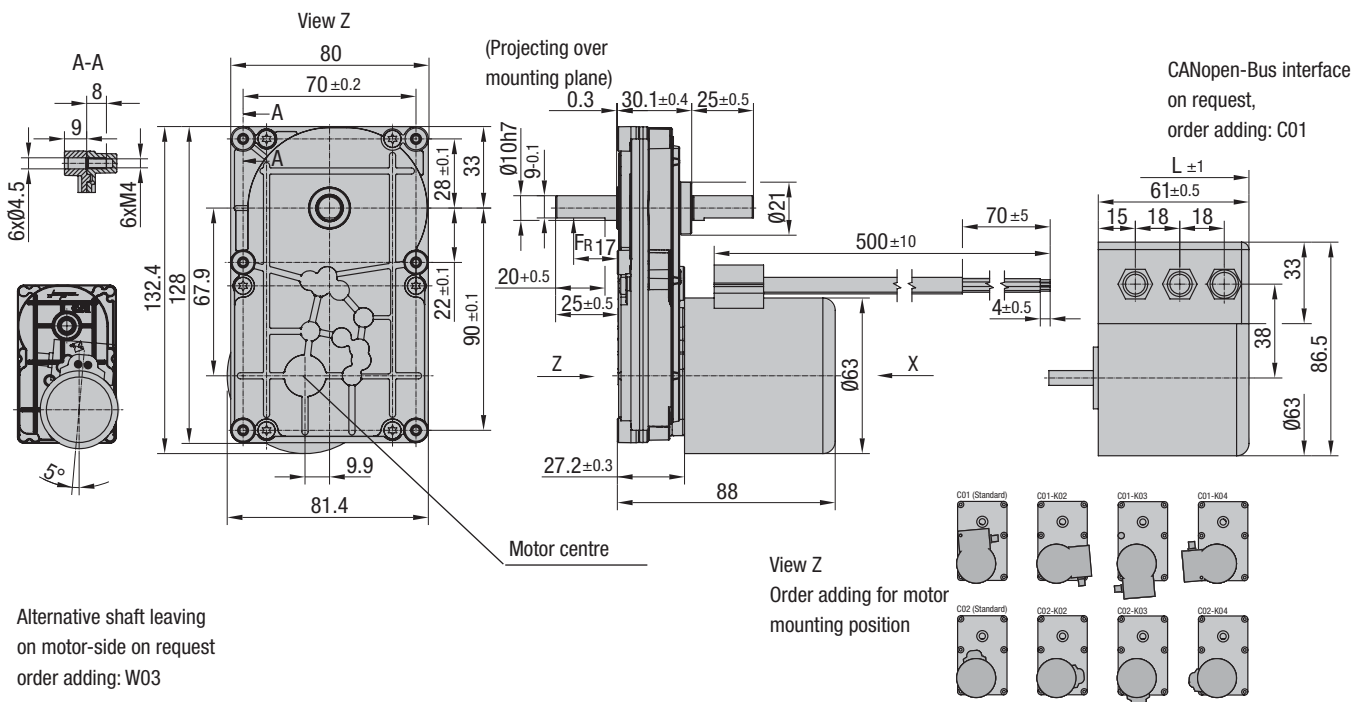



# EC motor VDC 3-54-14


with Flatline 85



- **Spur gear unit:** Die-cast zinc housing
- **Max. permitted radial load:** 150 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Needle bearings on both sides
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature

Nominal data		Nominal voltage	Reduction	Drive torque	Output speed	Output power	Nominal current	Mass	Length
Type	Motor	V	i/No. of stages	M <sub>lab</sub> (Nm)	n <sub>lab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	m (kg)	L (mm)
85.4.C5414.F11	VDC-3-54-14	24	454,0/4	30,0	7,71	24	2,8	1,1	70
85.4.C5414.F13	VDC-3-54-14	24	1028,7/4	30,0	3,40	11	2,8	1,1	70

Subject to alterations

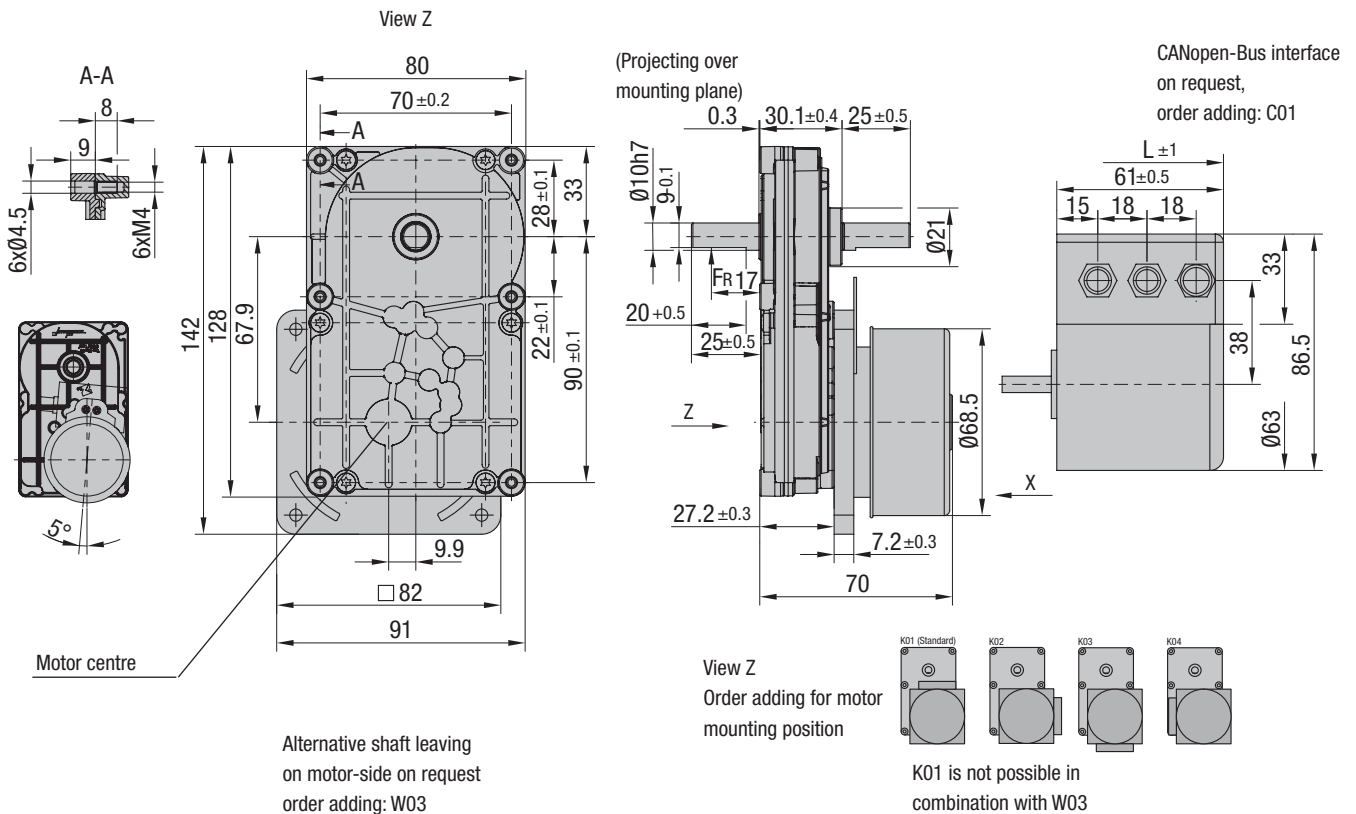

# EC motor VDC 3-54-14


with Compactline 90



- **Spur gear unit:** Die-cast zinc housing
- **Max. permitted radial load:** 120 N
- **Max. permitted axial load:** 40 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Slide/needle bearings
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature

Nominal data		Nominal voltage	Reduction	Drive torque	Output speed	Output power	Nominal current	Mass	Length
Type	Motor	V	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	m (kg)	L (mm)
90.2.C5414.C01	VDC-3-54-14	24	16,0/2	1,7	219	39	2,8	0,8	84
90.2.C5414.C05	VDC-3-54-14	24	32,0/2	3,4	109	39	2,8	0,8	84
90.3.C5414.C07	VDC-3-54-14	24	57,8/3	5,5	60,6	35	2,8	0,8	84
90.3.C5414.C08	VDC-3-54-14	24	79,1/3	7,0	44,2	32	2,8	0,8	84
90.3.C5414.C09	VDC-3-54-14	24	121,6/3	7,0	28,8	21	2,8	0,8	84
90.4.C5414.C10	VDC-3-54-14	24	189,0/4	9,0	18,5	17	2,8	0,9	84
90.4.C5414.C12	VDC-3-54-14	24	368,0/4	9,0	9,51	9	2,8	0,9	84

Subject to alterations

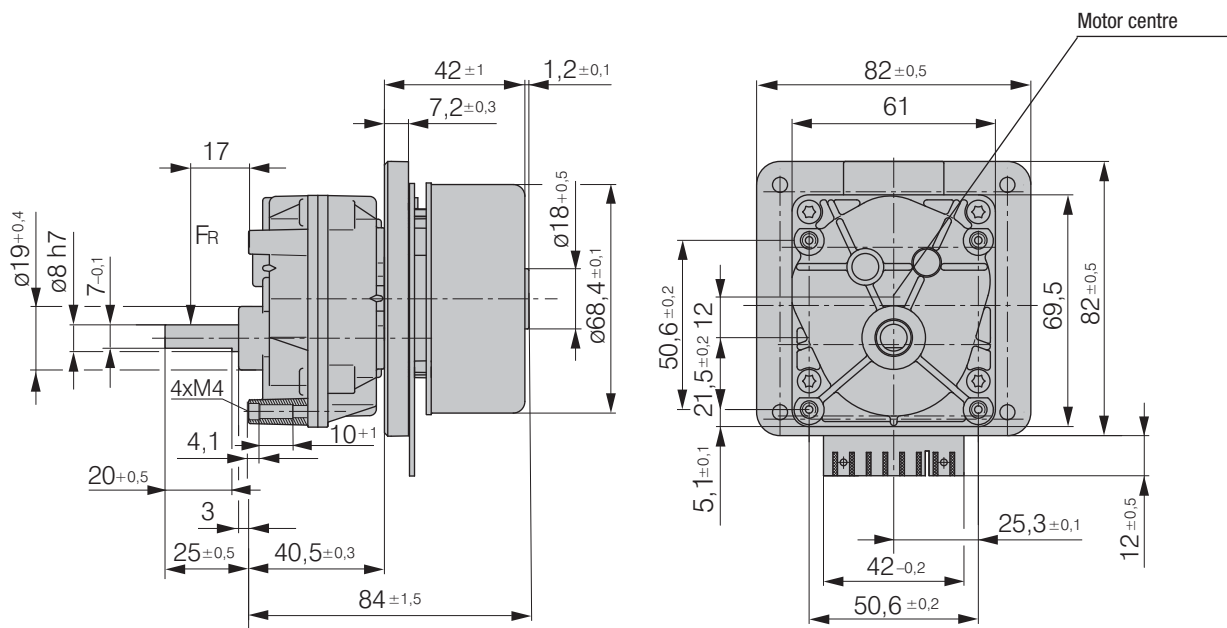

# EC motor BG 4310


with Compactline 92



- **Spur gear unit:** Die-cast zinc housing
- **Type of protection:** IP 20
- **Max. permitted radial load:** 150 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Needle bearings on both sides
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature
- **Technical features:**  
Control input 0-10 V (optional PWM)  
cw (optional reverse on start)  
Tach output optional

Nominal data		Nominal voltage	Frequency	Reduction	Drive torque	Output speed	Output power	Nominal current	Mass	Length
Type	Motor	V	Hz	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	m (kg)	L (mm)
92.3.B4310.C01	BG 4310	230	50	184,4/3	15	2,71...16,27	25	---	1,4	100
92.3.B4310.C02	BG 4310	230	50	274,6/3	20	1,82...10,92	23	---	1,4	100

Subject to alterations

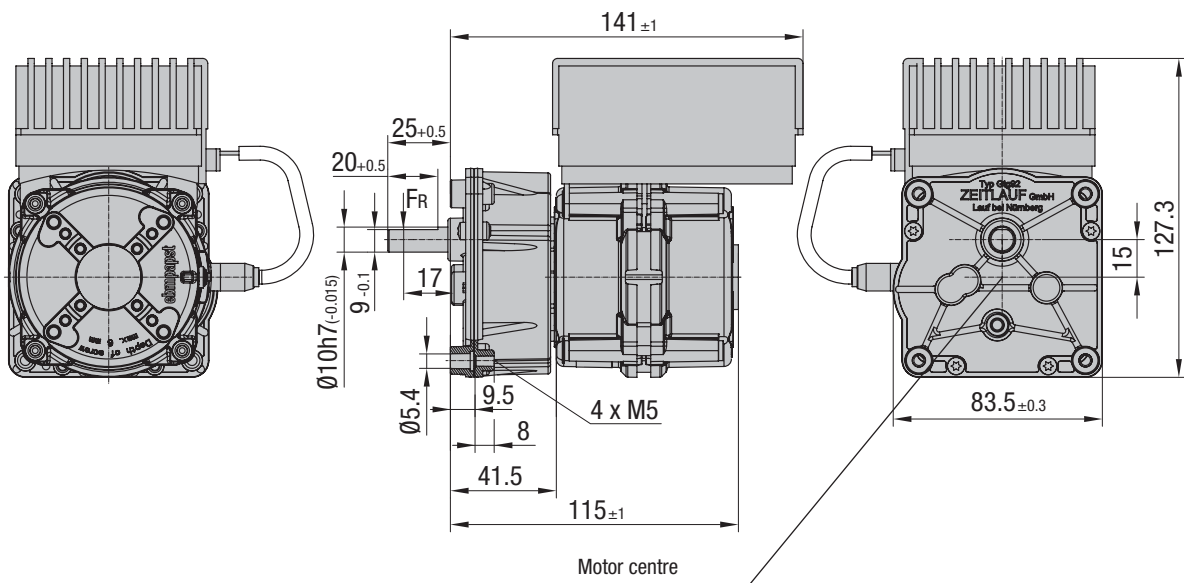

# EC motor BG 4310


with Flatline 85




- **Spur gear unit:** Die-cast zinc housing
- **Type of protection:** IP 20
- **Max. permitted radial load:** 150 N
- **Max. permitted axial load:** 50 N
- **Expected service life:** 5000 h (Lifetime lubrication)
- **Input stage:** Noise optimized
- **Gearbox output shaft:** Needle bearings on both sides
- **Mode of operation:** Continuous operation S1 till to 50 °C ambient air temperature
- **Technical features:**  
Control input 0-10 V (optional PWM)  
cw (optional reverse on start)  
Tach output optional

Nominal data		Nominal voltage	Frequency	Reduction	Drive torque	Output speed	Output power	Nominal current	Mass	Length
Type	Motor	V	Hz	i/No. of stages	M <sub>ab</sub> (Nm)	n <sub>ab</sub> (rpm)	P <sub>ab</sub> (W)	I (A)	m (kg)	L (mm)
85.4.B4310.F01	BG 4310	230	50	303,6/4	25	1,65...9,88	26	---	1,5	106
85.4.B4310.F02	BG 4310	230	50	454,0/4	30	1,10...6,61	21	---	1,5	106

Subject to alterations

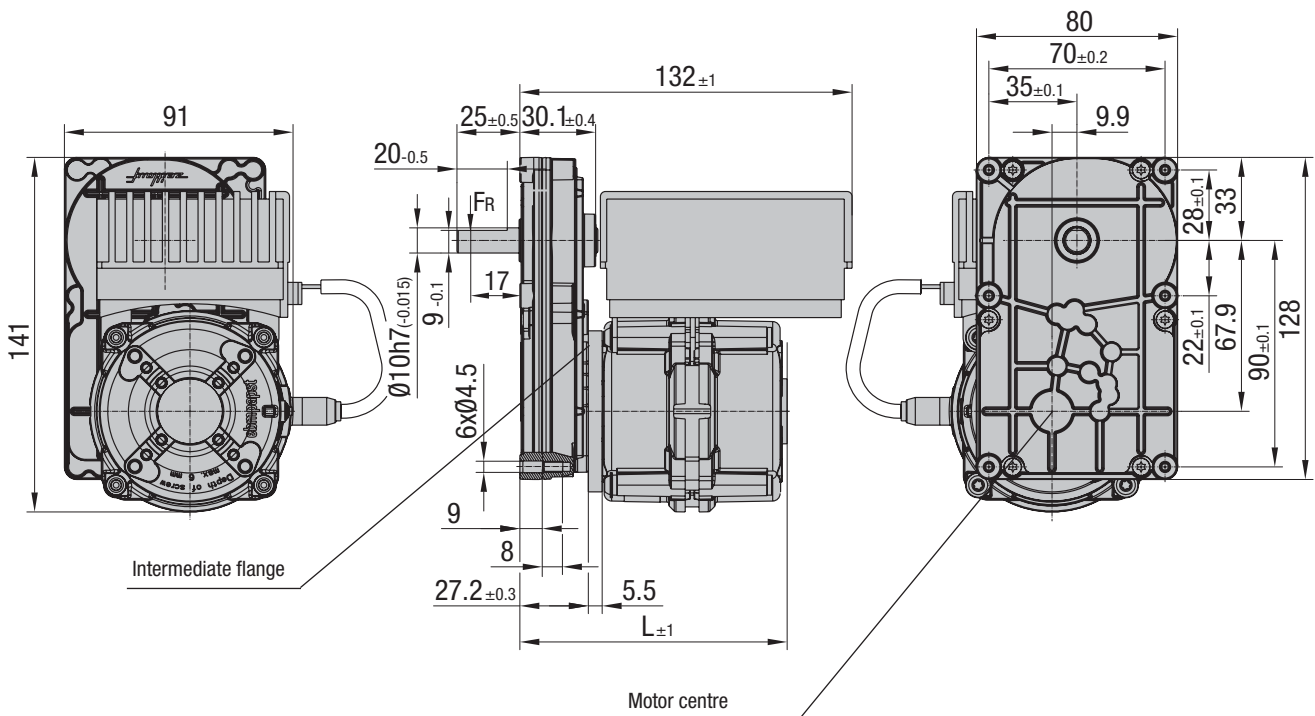


# Scroll dimensions

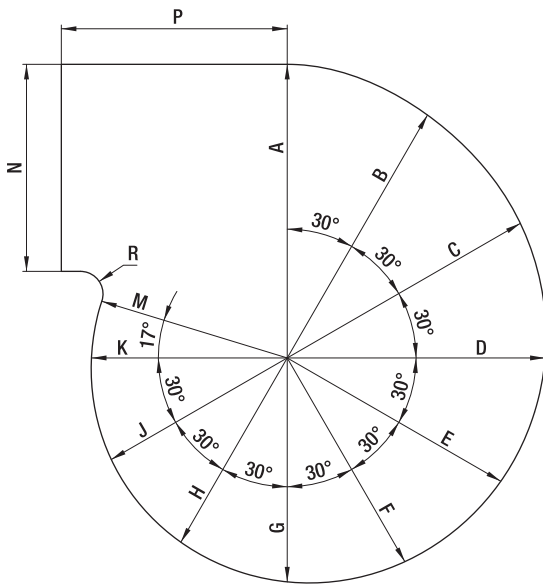

Scroll dimensions for AC / EC centrifugal fans (recommended by ebm-papst)

Size	A	B	C	D	E	F	G	H	J	K	M	N	P	R
Ø 140	121	116	111	106	102	97	92	88	84	82	80	86	93	9
Ø 150/152	130	124	119	114	109	104	99	94	90	87	86	92	100	10
Ø 160	139	132	127	122	116	111	106	100	96	93	92	98	107	11
Ø 180	156	149	143	137	131	125	119	113	108	104	103	110	120	12
Ø 210	182	174	167	160	152	146	139	132	127	121	120	128	140	14
Ø 250	218	209	200	192	182	175	167	158	152	145	144	154	168	19

subject to alterations

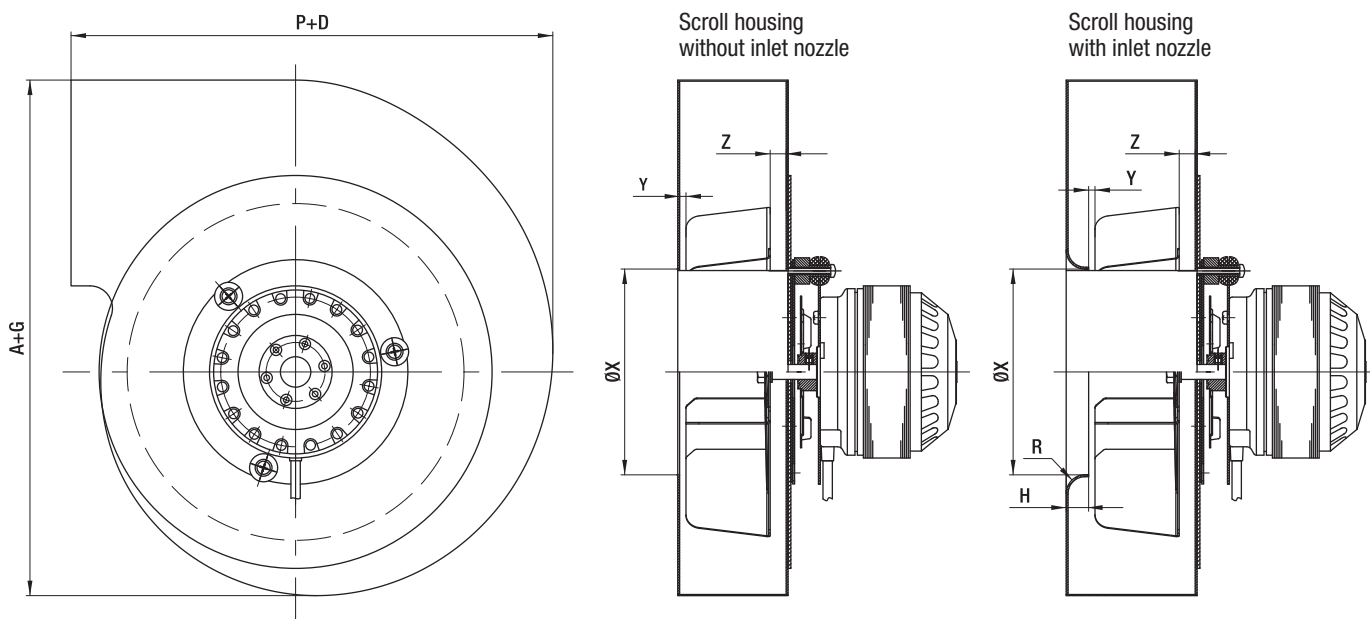

Distance between impeller and scroll housing/inlet nozzle (recommended by ebm-papst)

Size	X	Y	Z	R	H
Ø 140	80-100	3-5	8-11	10	10
Ø 150/152	90-110	3-5	8-11	10	10
Ø 160	100-120	3-5	8-11	10	10
Ø 180	110-130	3-5	8-11	12	12
Ø 210	120-135	3-5	8-11	12	12
Ø 250	140-160	3-5	8-11	12	12



subject to alterations

## Additional shaft seal

ebm-papst also offers an additional shaft seal for its exhaust gas blowers. This was developed specifically for this application, intended for installation in passive and low-energy houses with regulated ventilation in apartments, for example.


The sealing system is made from high temperature-resistance ceramic and ensures low leakage over the long term.

The final suitability of the system must be qualified and approved in the end device.

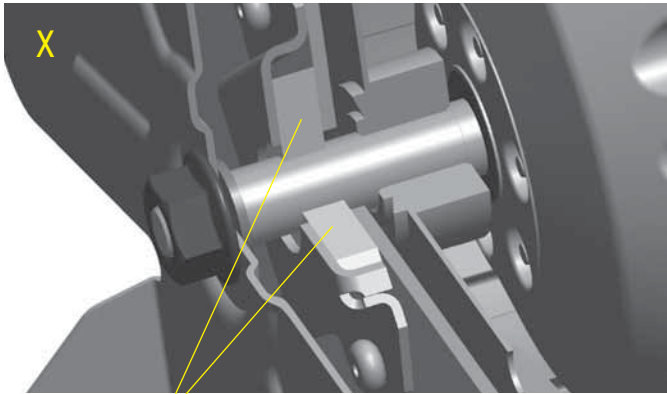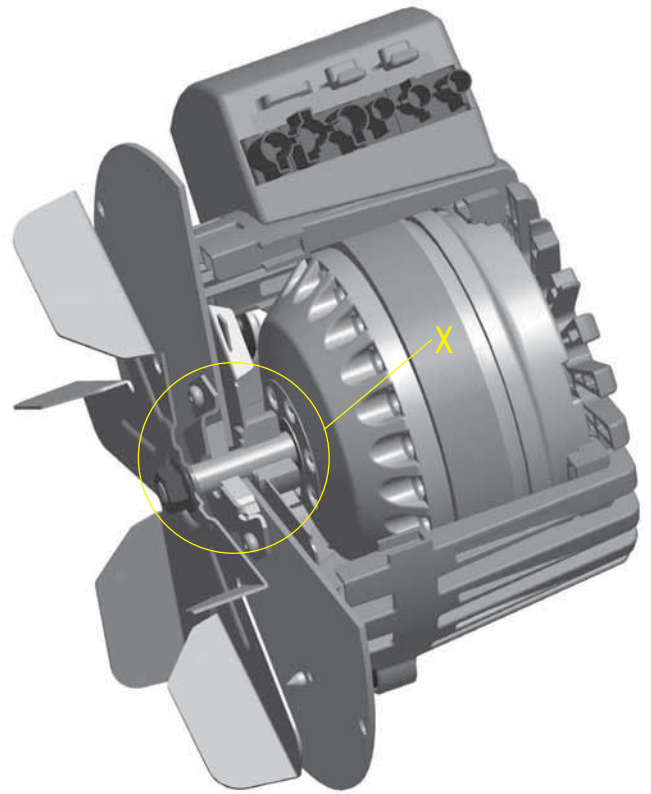

Shaft seal made from ceramic



## Electrical connection EC (11) Tangential blowers

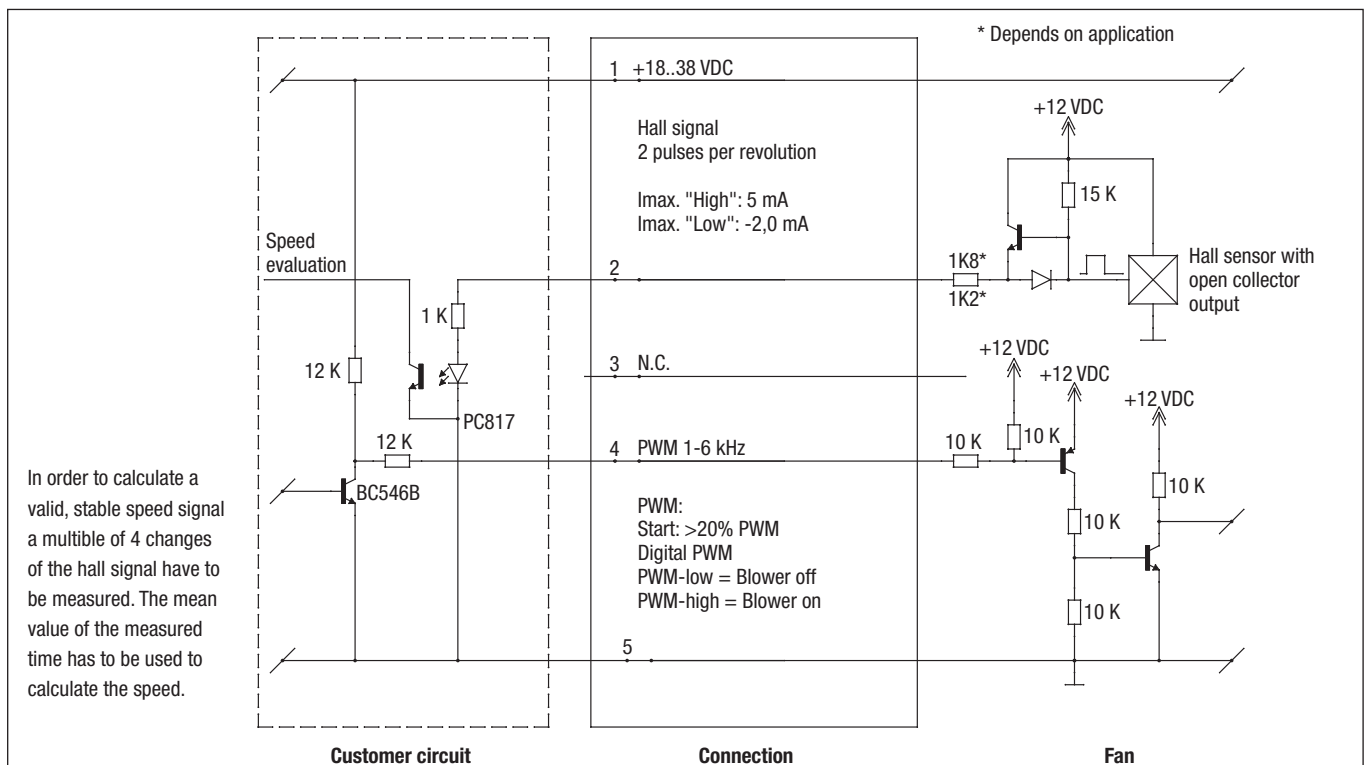

# Electrical connections EC H1)

## Technical features:

- PFC (passive)
- Output 10 VDC max. 1,1 mA
- Tach output
- Control input 0-10 VDC / PWM
- Over-temperature protected electronics / motor

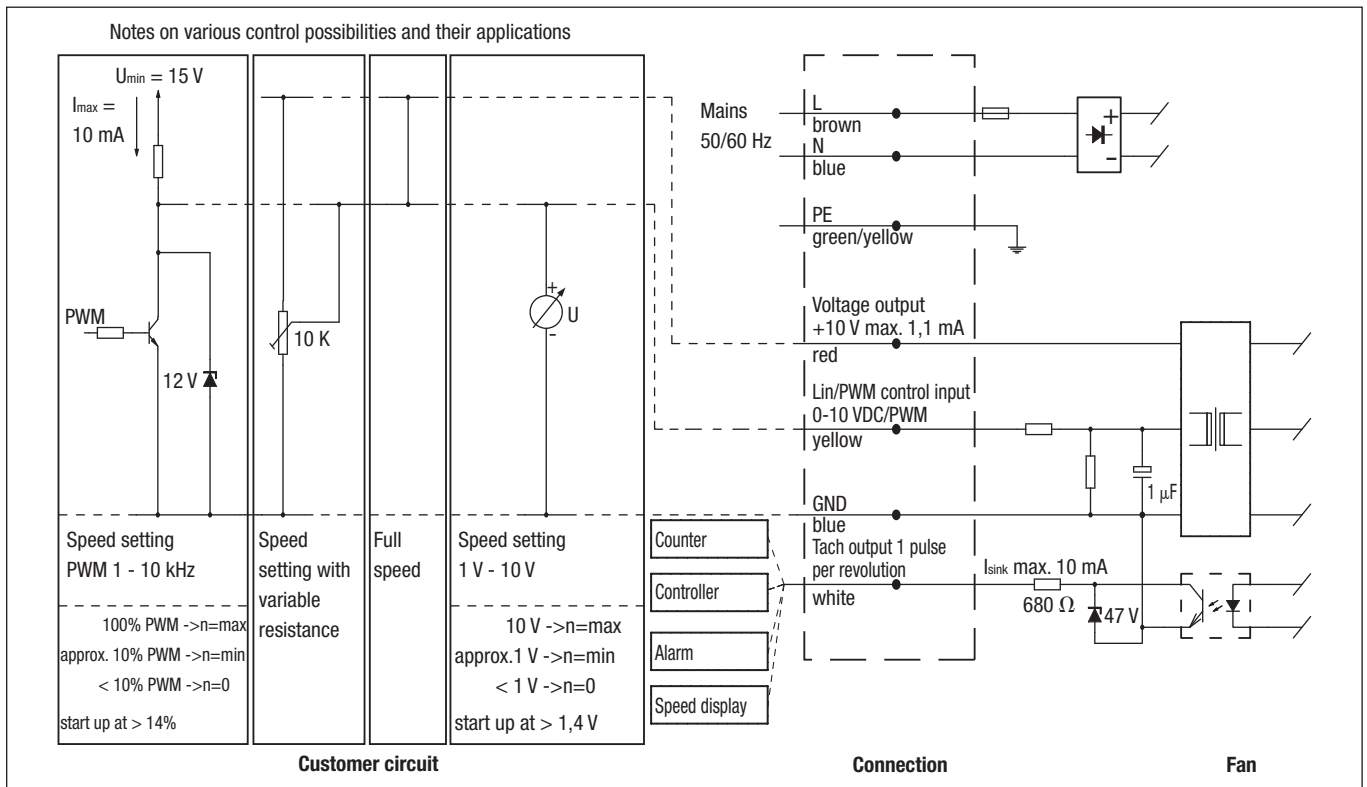

Line	Connection	Colour	Assignment / function
1	L	brown	Mains 50/60 Hz, phase
	N	blue	Mains 50/60 Hz, neutral
	PE	green/yel.	Protective earth


Line	Connection	Colour	Assignment / function
2	+ 10 V	red	Voltage output +10 V max. 1,1 mA
	0-10 V / PWM	yellow	Control input (Impedance 100 kΩ)
	GND	blue	GND
	Tacho	white	Tach output: 1 pulse per revolution



# Electrical connections EC H4)

## Technical features:

- Control input 0-10 VDC / PWM
- Output 10 VDC max. 1,1 mA
- Tach output
- Line undervoltage detection
- Locked-rotor protection
- Soft start
- Over-temperature protected electronics / motor

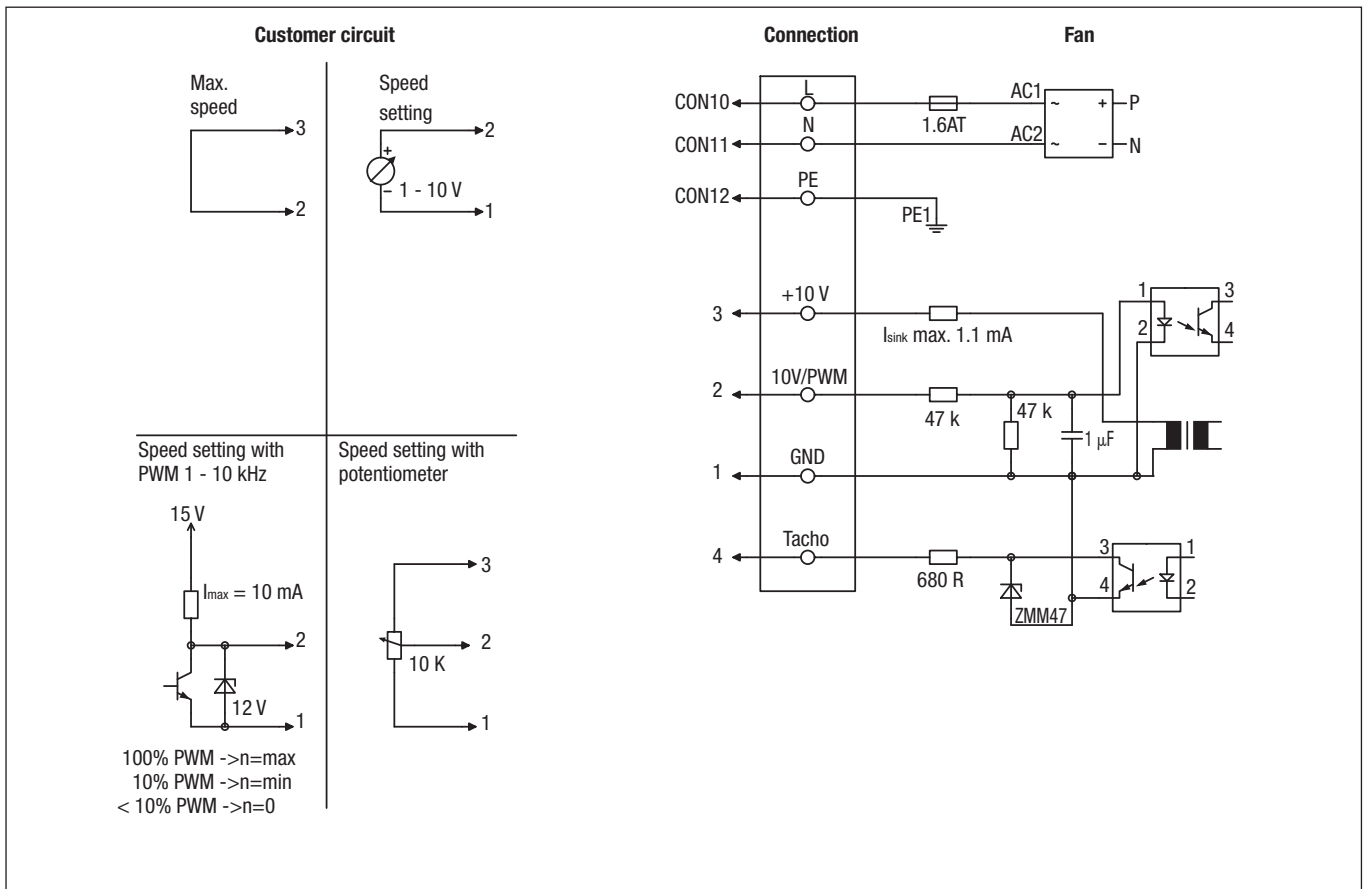


Line	Connection	Colour	Assignment / function
CON10	L	black	Power supply 230 VAC, 50 - 60 Hz, see type plate for voltage range
CON11	N	blue	Neutral conductor
CON12	PE	green/yellow	Protective earth
1	GND	blue	GND-Connection for control interface
2	0-10V / PWM	yellow	Control input 0-10V or PWM, electrically isolated
3	10V max. 1.1 mA	red	Voltage output 10V / 1.1 mA, electrically isolated, not short-circuit-proof
4	Tacho	white	Tach output: Open Collector, 1 pulse per revolution, electrically isolated

# Electrical connections EC J5)

## Technical features:

- Control input 0-10 VDC / PWM
- Tach output
- Motor current limitation
- Reverse polarity and locked-rotor protection
- Soft start

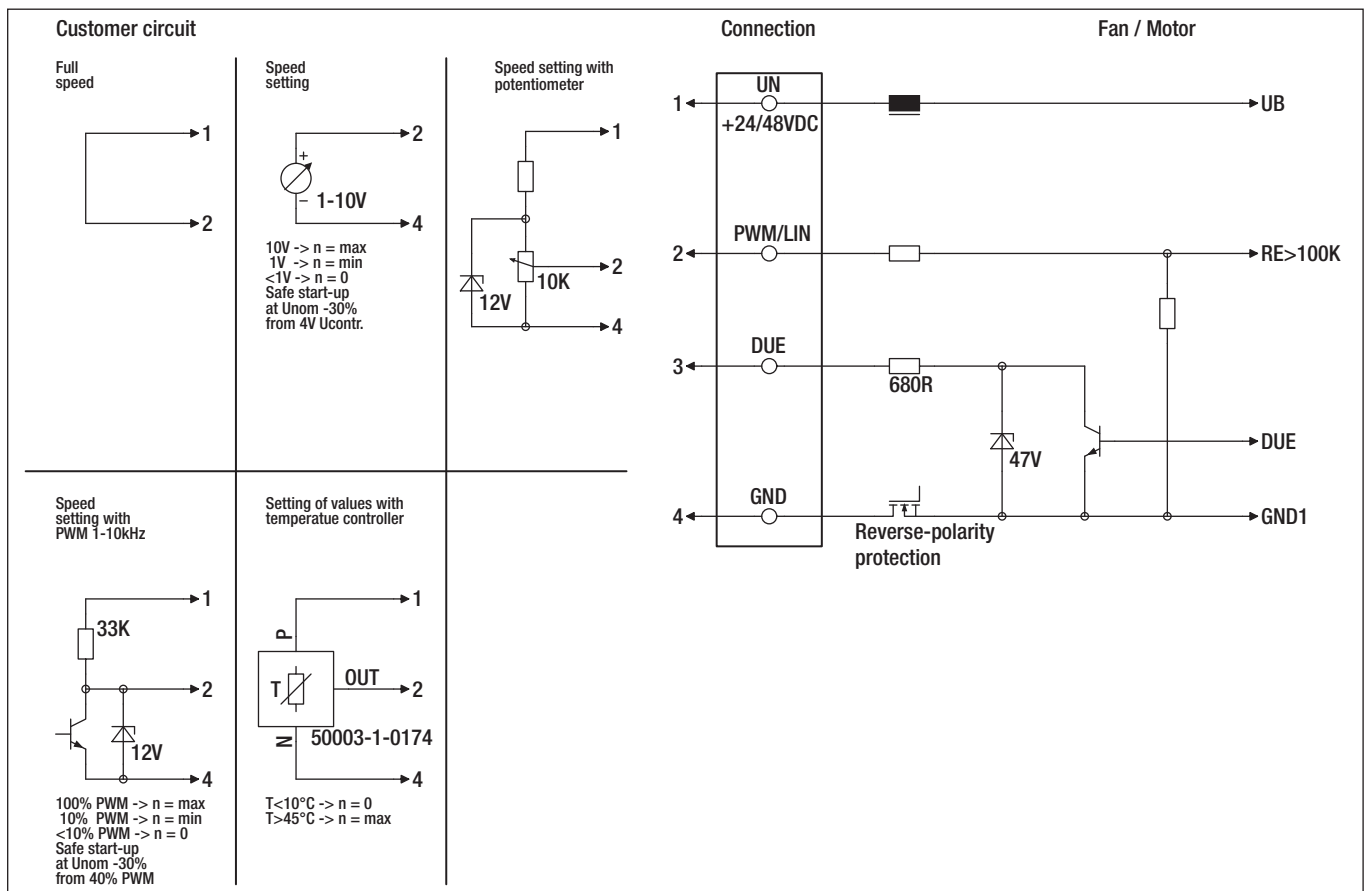


Line	Connection	Colour	Assignment / function
1	UN +24/48 VDC	red	Power supply 24/48 VDC, maximum ripple $\pm 3,5 \%$
2	PWM/LIN	yellow	Control input Re >100 K
3	Tach	white	Tach output, 3 pulses per revolution, Isink max. = 10 mA
4	GND	blue	Reference ground


# Electrical connections AC

## A1) / B)

**A1) Single-phase capacitor motor**  
with TOP wired internally

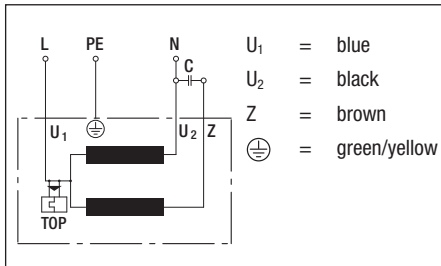


**B) Shaded pole motor**  
with TOP wired internally

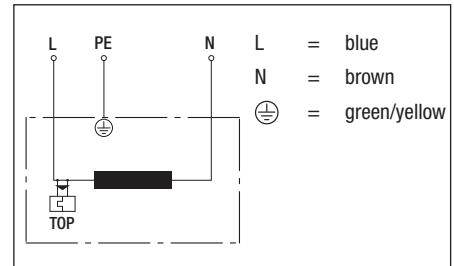

# Electrical connections Hall IC C) / D)


## C) Speed monitoring with EC fans

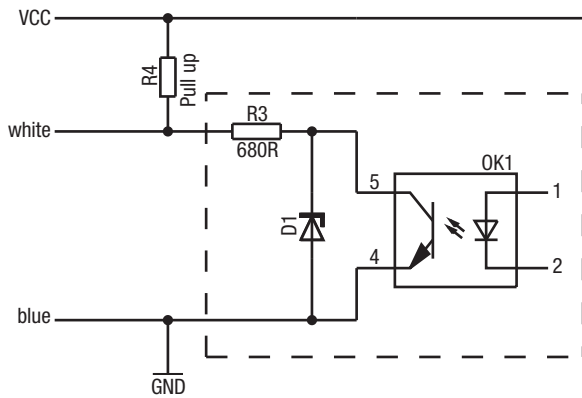

Fan connections: white (OUT): Speed signal  
blue (IN): Ground connection

Specification from ebm-papst:  
 $I_{sink_{max}} = 10 \text{ mA}$  (by transistor in OK1)  
 $V_{CC_{max}} = 40 \text{ V}$  (external supply to be provided by customer)  
 Pull up resistor = Pay attention to power loss of the resistors in dimensioning!

## D) Speed monitoring with AC fans

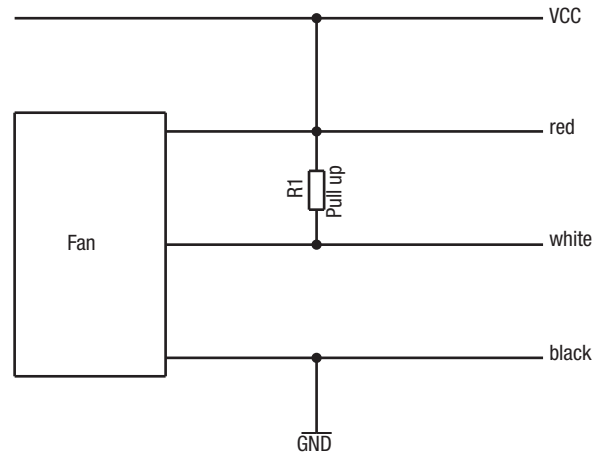

Fan connections: red (IN): DC-Voltage  
white (OUT): Speed signal  
black (IN): Ground connection

Specification from ebm-papst:  
 $V_{CC} = 5 \text{ VDC}$  (external supply to be provided by customer)  
 Pull up resistor = 4,5 k $\Omega$

# Technical parameters & scope

## High standards for all ebm-papst products

Here at ebm-papst, we constantly strive to further improve our products in order to be able to offer you the best possible product for your application. Careful monitoring of the market ensures that technical innovations are reflected in the improvements of our products. Based on the technical parameters listed below and the ambience you want our product to operate in, we here at ebm-papst can always work out the best solution for your specific application.

### General performance parameters

Any deviations from the technical data and parameters described here are listed on the product-specific data sheet.

### Type of protection

The type of protection is specified in the product-specific data sheets.

### Insulation class

The insulation class is specified in the product-specific data sheets.

### Mounting position

The mounting position is specified in the product-specific data sheets.

### Condensate discharge holes

Information on the condensate discharge holes is provided in the product-specific data sheets.

### Mode of operation

The mode of operation is specified in the product-specific data sheets.

### Protection class

The protection class is specified in the product-specific data sheets.



### Information on ErP directive for hot air blowers

With implementation of the ErP directive, more stringent efficiency requirements apply in two stages as of 2013 and 2015 for fans in the power range between 125 W and 500 kW. The corresponding minimum efficiency values for the different types of fan are stipulated by the EU.

ebm-papst GreenTech EC fans already surpass the minimum values required by law. Users can recognise fans complying with the directive from the CE marking for example. Exceptions not subject to the directive include fans for conveying hot media at temperatures in excess of 100°C

### Service life

The service life of ebm-papst products depends on two major factors:

- The service life of the insulation system
- The service life of the bearing system

The service life of the insulation system mainly depends on voltage level, temperature and ambient conditions, such as humidity and condensation. The service life of the bearing system depends mainly on the thermal load on the bearing.

The majority of our products use maintenance-free ball bearings for any mounting position possible.

The service life L10 of the ball bearings can be taken as approx. 40,000 operating hours at an ambient temperature of 40 °C, yet this estimate can vary according to the actual ambient conditions.

We will gladly provide you with a lifetime calculation taking into account your specific operating conditions.

### Motor protection / thermal protection

Information on motor protection and thermal protection is provided in the product-specific data sheets.

Depending on motor type and field of application, the following protective features are realised:

- Thermal overload protection (TOP), either in-circuit or external
- PTC with electronic diagnostics
- Impedance protection
- Thermal overload protection (TOP) with electronic diagnostics
- Current limitation via electronics

If an external TOP is connected, the customer has to make sure to connect a conventional trigger device for switching it off.

Products without fitted TOP and without protection against improper use, a motor protection complying with the valid standards has to be installed.

### Mechanical strain / performance parameters

All ebm-papst products are subjected to comprehensive tests complying with the normative specifications. In addition to this, the tests also reflect the vast experience and expertise of ebm-papst.



### **Vibration test**

Vibration tests are carried out in compliance with

- Vibration test in operation according to DIN IEC 68, parts 2-6
- Vibration test at standstill according to DIN IEC 68, parts 2-6

### **Shock load**

Shock load tests are carried out in compliance with

- Shock load according to DIN IEC 68, parts 2-27

### **Balancing quality**

Testing the balancing quality is carried out in compliance with

- Residual imbalance according to DIN ISO 1940
- Standard balancing quality level G 6.3

Should you require a higher balancing quality level for your specific application, please let us know and specify this when ordering your product.

### **Chemo-physical strain / performance parameters**

Should you have questions about chemo-physical strain, please direct them to your ebmpapst contact.

### **Fields of application, industries and applications**

Our products are used in various industries and applications:

Ventilation, air-conditioning and refrigeration technology, clean room technology, automotive and rail technology, medical and laboratory technology, electronics, computer and office technology, telecommunications, household appliances, heating, machines and plants, drive engineering. Our products are not designed for use in the aviation and aerospace industry!

### **Legal and normative directives**

The products described in this catalogue are designed, developed and produced in keeping with the standards in place for the relevant product and, if known, the conditions governing the relevant fields of application.

### **Standards**

Information on standards is provided in the product-specific data sheets.

### **EMC**

Information on EMC standards is provided in the product-specific data sheets.

Complying with the EMC standards has to be established on the final appliance, as different mounting situations can result in changed EMC properties.

### **Leakage current**

Information on the leakage current is provided in the product-specific data sheets.

Measuring is according to IEC 60990.

### **Approvals**

In case you require a specific approval for your ebmpapst product (VDE, UL, GOST, CCC, CSA, etc.) please let us know.

Most of our products can be supplied with the relevant approval.

Information on existing approvals is provided in the product-specific data sheets.

### **Air performance measurements**

All air performance measurements are carried out on suction side and on chamber test beds conforming to the specifications as per ISO 5801 and DIN 24163. The fans under test are installed in the measuring chamber at free air intake and exhaust (installation category A) and are operated at nominal voltage, with AC also at nominal frequency, and without any additional components such as guard grilles.

As required by the standard, the air performance curves correspond to an air density of 1.2 kg/m<sup>3</sup>.

# Technical parameters & scope



## Measurement conditions for air and noise measurement

ebm-papst products are measured under the following conditions:

- Axial and diagonal fans in direction of rotation “V” in full nozzle and without guard grille
- Backward curved centrifugal fans, free-running and with inlet nozzle
- Forward curved single and dual inlet centrifugal fans with housing

## Noise measurements

All noise measurements are carried out in low-reflective test rooms with reverberant floor. Thus the ebm-papst acoustic test chambers meet the requirements of precision class 1 according to DIN EN ISO 3745. For noise measurement, the fans being tested are placed in a reverberant wall and operated at nominal voltage (for AC, also at nominal frequency) without additional attachments such as the guard grille.

## Sound pressure level and sound level

All acoustic values are established according to ISO 13347, DIN 45635 and ISO 3744/3745 to accuracy class 2 and given in A-rated form.

When the sound pressure level ( $L_p$ ) is measured, the microphone is on the intake side of the fan being tested, usually at a distance of 1 m on the fan axis.

To measure the sound power level ( $L_w$ ), 10 microphones are distributed over an enveloping surface on the intake side of the fan being tested (see graphic). The sound power level measured can be roughly calculated from the sound pressure level by adding 7 dB.


Measuring configuration as per ISO 13347-3 respectively DIN 45635-38:

- 10 measuring points

$$d \geq D$$

$$h = 1,5d \dots 4,5d$$

$$\text{Measurement area } S = 6d^2 + 7d(h + 1,5d)$$

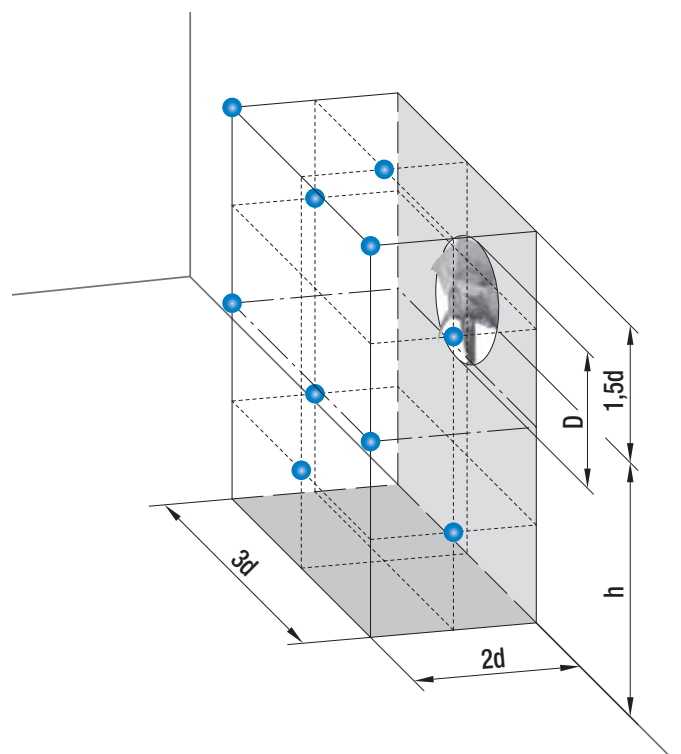




### Combined level of multiple same-level sound sources

Adding 2 noise sources with the same level results in a level increase of approx. 3 dB.

The noise characteristics of multiple identical fans can be determined in advance based on the noise values specified in the data sheet. This is shown in the diagram opposite.

**Example:** 8 A3G800 axial fans are on a condenser. According to the data sheet, the sound pressure level of a fan is approximately 75 dB(A). The level increase measured from the diagram is 9 dB. Thus the overall sound level of the installation can be expected to be 84 dB(A).

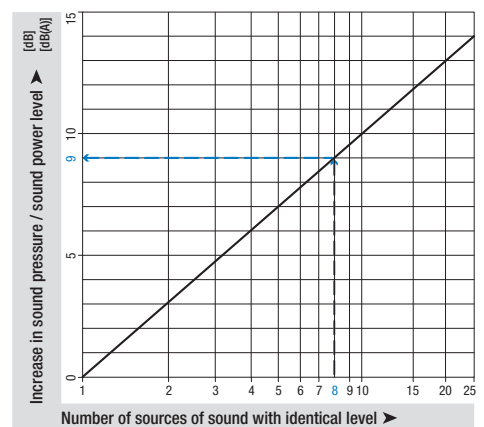


### Combined level of two different-level sound sources

The acoustic performance of two different fans can be predetermined based on the sound levels given in the data sheet. This is shown in the diagram opposite.

**Example:** There is an axial fan A3G800 with a sound pressure level of 75 dB(A) at the operating point and an axial fan A3G710 with 71 dB(A) in a ventilation unit. The level difference is 4 dB.


The level increase can now be read in the diagram as approx. 1.5 dB. This means that the overall sound level of the unit can be expected to be 76.5 dB(A).

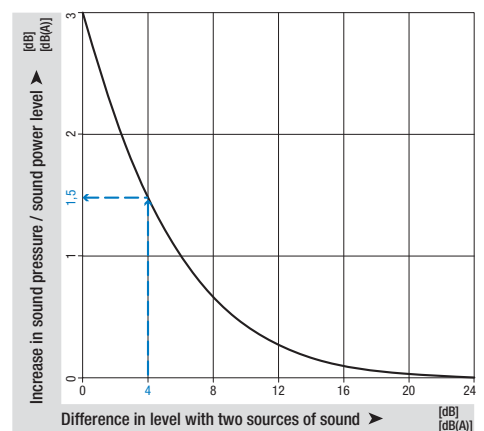

### Distance laws

Sound power level is independent of distance to the sound source. In contrast to this, sound pressure level decreases the further away the noise source is. The adjacent diagram shows the decrease in level under far sound field conditions. Far sound field conditions apply whenever the distance between microphone and fan is big when compared to fan diameter and wavelength to be considered. For more information on far sound field, please consult the relevant literature on this complex topic. Per doubling of distance, the level in the far sound field decreases by 6 dB. In the near field of the fan, other correlations apply and the decrease in levels can be considerably smaller. The following example only applies to far sound field conditions and can vary strongly depending on the installation effects:

With an axial fan A3G300, a sound pressure level of 65 dB(A) was measured at a distance of 1 m. According to the adjacent diagram, at a distance of 20 m we would get a reduction by 26 dB, i.e. a sound pressure level of 39 dB(A).

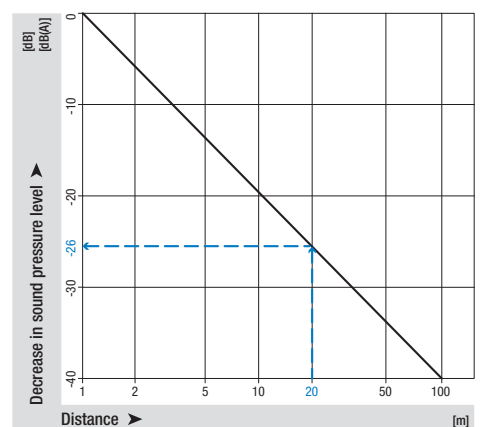



# ebm-papst in Germany

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2  
74673 Mulfingen  
GERMANY  
Phone +49 7938 81-0  
Fax +49 7938 81-110  
info1@de.ebmpapst.com

## ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1  
78112 St. Georgen  
GERMANY  
Phone +49 7724 81-0  
Fax +49 7724 81-1309  
info2@de.ebmpapst.com

## ebm-papst Landshut GmbH

Hofmark-Aich-Straße 25  
84030 Landshut  
GERMANY  
Phone +49 871 707-0  
Fax +49 871 707-465  
info3@de.ebmpapst.com

## ebm-papst Zeitlauf GmbH & Co. KG

Industriestraße 9  
91207 Lauf a. d. Pegnitz  
GERMANY  
Phone +49 9123 945-0  
Fax +49 9123 945-145  
www.zeitlauf.com

### Berlin

 Dipl.-Ing. (TH) Jens Duchow  
Händelstraße 7  
16341 Panketal  
GERMANY  
Phone +49 30 944149-62  
Fax +49 30 944149-63  
Jens.Duchow@de.ebmpapst.com

### Bielefeld

 Dipl.-Ing. (FH) Wolf-Jürgen Weber  
Niehausweg 13  
33739 Bielefeld  
GERMANY  
Phone +49 5206 91732-31  
Fax +49 5206 91732-35  
Wolf-Juergen.Weber@de.ebmpapst.com

### Dortmund

 Dipl.-Ing. (FH) Hans-Joachim Pundt  
Auf den Steinern 3  
59519 Möhnese-Völlinghausen  
GERMANY  
Phone +49 2925 800-407  
Fax +49 2925 800-408  
Hans-Joachim.Pundt@de.ebmpapst.com

### Frankfurt

 Dipl.-Ing. Christian Kleffmann  
Dr.-Hermann-Krause-Straße 23  
63452 Hanau  
GERMANY  
Phone +49 6181 1898-12  
Fax +49 6181 1898-13  
Christian.Kleffmann@de.ebmpapst.com

### Halle

 Dipl.-Ing. (TU) Michael Hanning  
Lercheneck 4  
06198 Salztal / OT Lieskau  
GERMANY  
Phone +49 345 55124-56  
Fax +49 345 55124-57  
Michael.Hanning@de.ebmpapst.com

### Hamburg

 Ingenieurbüro Breuell GmbH  
Ing. Dirk Kahl  
Elektroingenieur  
Grützmühlenweg 48  
22339 Hamburg  
GERMANY  
Phone +49 40 538092-19  
Fax +49 40 538092-84  
Dirk.Kahl@de.ebmpapst.com

### Heilbronn / Heidelberg

 Dipl.-Ing. Mark Gartner  
Gehweg 12  
74199 Unterheinriet  
GERMANY  
Phone +49 7130 404569-1  
Fax +49 7130 404569-2  
Mark.Gartner@de.ebmpapst.com

### Kassel

 Dipl.-Ing. (FH) Ralph Brück  
Hoherainstraße 3 b  
35075 Gladenbach  
GERMANY  
Phone +49 6462 4071-10  
Fax +49 6462 4071-11  
Ralph.Brueck@de.ebmpapst.com

### Koblenz

 Winfried Schaefer  
Hinter der Kirch 10  
56767 Uersfeld  
GERMANY  
Phone +49 2657 16-96  
Fax +49 2657 16-76  
Winfried.Schaefer@de.ebmpapst.com

### Munich

 Dipl.-Wirt.-Ing. (FH) Jens Peter  
Landsbergerstraße 14  
86932 Pürgen  
GERMANY  
Phone +49 8196 99877-54  
Fax +49 8196 99877-55  
Jens.Peter@de.ebmpapst.com

### Nuremberg

 Dipl.-Wirt.-Ing. (FH) Axel Resch  
Dr.-August-Koch-Str. 1  
91639 Wolframs-Eschenbach  
GERMANY  
Phone +49 9875 9783-170  
Fax +49 9875 9783-171  
Axel.Resch@de.ebmpapst.com

### Offenburg

 Dipl.-Ing. (FH) Ralf Braun  
Hubeneck 21  
77704 Oberkirch  
GERMANY  
Phone +49 7802 9822-52  
Fax +49 7802 9822-53  
Ralf.Braun@de.ebmpapst.com

### Stuttgart

 Dipl.-Ing. (FH) Rudi Weinmann  
Hindenburgstraße 100/1  
73207 Plochingen  
GERMANY  
Phone +49 7153 9289-80  
Fax +49 7153 9289-81  
Rudi.Weinmann@de.ebmpapst.com

### Ulm

 M.Sc. Reinhard Sommerreißer  
Am Silbermannpark 10  
86161 Augsburg  
GERMANY  
Phone +49 821 6610-7023  
Fax +49 821 6610-7024  
Reinhard.Sommerreisser@de.ebmpapst.com

## Distributors

### Frankfurt

 R.E.D. Handelsgesellschaft mbH  
Gutenbergstraße 3  
63110 Rodgau - Jügesheim  
GERMANY  
Phone +49 6106 841-0  
Fax +49 6106 841-111  
info@red-elektromechnik.de  
www.red-elektromechnik.de

### Hamburg

 Breuell + Hilgenfeldt GmbH  
Grützmühlenweg 48  
22339 Hamburg  
GERMANY  
Phone +49 40 538092-20  
Fax +49 40 538092-84  
info@breuell-hilgenfeldt.de

### Munich

 A. Schweiger GmbH  
Ohmstraße 1  
82054 Sauerlach  
GERMANY  
Phone +49 8104 897-0  
Fax +49 8104 897-90  
info@schweiger-gmbh.de  
www.schweiger-gmbh.com

● **Express Service-Center** (1 to 5 pieces)

### North

 Breuell + Hilgenfeldt GmbH  
Grützmühlenweg 48  
22339 Hamburg  
GERMANY  
Phone +49 40 538092-20  
Fax +49 40 538092-84  
info@breuell-hilgenfeldt.de

### South

 HDS Ventilatoren Vertriebs GmbH  
Glaswiesenstraße 1  
74677 Dörzbach  
GERMANY  
Phone +49 7937 80355-20  
Fax +49 7937 80355-25  
info@hds-gmbh.net  
www.hds-gmbh.net

# ebm-papst in Europe



## Europe



### Austria

ebm-papst Motoren & Ventilatoren GmbH  
Straubingstraße 17  
4030 Linz  
AUSTRIA  
Phone +43 732 321150-0  
Fax +43 732 321150-20  
info@at.ebmpapst.com  
www.ebmpapst.at



### Belarus

ebm-papst Bel AgmbH  
Lipkovskaya Gasse 34  
Office No.6, Room 106,107  
223010 Minsk  
BELARUS  
Phone +375 17 3851556  
Fax +375 17 3851556  
info@by.ebmpapst.com  
www.ebmpapst.by



### Belgium

ebm-papst Benelux B.V.  
Sales office Belgium-Luxemburg  
Romeinsestraat 6/0101  
Research Park Haasrode  
3001 Heverlee-Leuven  
BELGIUM  
Phone +32 16 396-200  
Fax +32 16 396-220  
info@be.ebmpapst.com  
www.ebmpapst.be



### Bulgaria

ebm-papst Romania S.R.L.  
Str. Tarnavei No. 20  
500327 Brasov  
ROMANIA  
Phone +40 268 331859  
Fax +40 268 312805  
dudasludovic@xnet.ro



### Croatia

ebm-papst Industries Kft.  
Ezred u. 2.  
1044 Budapest  
HUNGARY  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com



### Czech Republic / Slovakia

ebm-papst CZ s.r.o.  
Kaštanová 34a  
620 00 Brno  
CZECH REPUBLIC  
Phone +420 544 502-411  
Fax +420 547 232-622  
info@ebmpapst.cz  
www.ebmpapst.cz



### Denmark

ebm-papst Denmark ApS  
Vallensbækvej 21  
2605 Brøndby  
DENMARK  
Phone +45 43 631111  
Fax +45 43 630505  
mail@dk.ebmpapst.com  
www.ebmpapst.dk



### Estonia

ebm-papst Oy, Eesti Filiaal  
Kesk tee 13  
Aaviku küla, Jüri Tehnopark  
75301 Rae Vald, Harjumaa  
ESTONIA  
Phone +372 65569-78  
Fax +372 65569-79  
www.ebmpapst.ee



### Finland

ebm-papst Oy  
Puistotie 1  
02760 Espoo  
FINLAND  
Phone +358 9 887022-0  
Fax +358 9 887022-13  
mailbox@ebmpapst.fi  
www.ebmpapst.fi



### France

ebm-papst sarl  
ZI Nord - rue A. Mohler  
BP 62  
67212 Obernai Cedex  
FRANCE  
Phone +33 820 326266  
Fax +33 3 88673883  
info@ebmpapst.fr  
www.ebmpapst.fr



### Greece

Helcoma  
Th. Rotas & Co OE  
Davaki 65  
17672 Kallithea-Attiki  
GREECE  
Phone +30 210 9513-705  
Fax +30 210 9513-490  
contact@helcoma.gr  
www.helcoma.gr



### Hungary

ebm-papst Industries Kft.  
Ezred u. 2.  
1044 Budapest  
HUNGARY  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com



### Iceland

RJ Engineers  
Stangarhyl 1a  
110 Reykjavik  
ICELAND  
Phone +354 567 8030  
Fax +354 567 8015  
rj@rj.is  
www.rj.is



### Ireland

ebm-papst UK Ltd.  
Chelmsford Business Park  
Chelmsford Essex CM2 5EZ  
UNITED KINGDOM  
Phone +44 1245 468555  
Fax +44 1245 466336  
sales@uk.ebmpapst.com  
www.ebmpapst.co.uk



### AuBren Limited

Portlaoise Business & Technology Park  
Mountrath Road  
Portlaoise, Co. Laois  
IRELAND  
Phone +353 57 8664343  
Fax +353 57 8664346  
sales@ie.aubren.com  
www.aubren.com



### Italy

ebm-papst Srl  
Via Cornaggia 108  
22076 Mozzate (Co)  
ITALY  
Phone +39 0331 836201  
Fax +39 0331 821510  
info@it.ebmpapst.com  
www.ebmpapst.it



### Macedonia

ebm-papst Industries Kft.  
Ezred u. 2.  
1044 Budapest  
HUNGARY  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com

# ebm-papst in Europe



 **Netherlands**  
ebm-papst Benelux B.V.  
Engelseweg 127  
5705 AC Helmond  
NETHERLANDS  
Phone +31 492 502-900  
Fax +31 492 502-950  
verkoop@nl.ebmpapst.com  
www.ebmpapst.nl

 **Norway**  
ebm-papst AS  
P.B. 173 Holmlia  
1203 Oslo  
NORWAY  
Phone +47 22 763340  
Fax +47 22 619173  
mailbox@ebmpapst.no  
www.ebmpapst.no

 **Poland**  
ebm-papst Polska Sp. z o.o.  
ul. Annopol 4A  
03236 Warszawa  
POLAND  
Phone +48 22 6757819  
Fax +48 22 6769587  
office@ebmpapst.pl  
www.ebmpapst.pl

 **Portugal**  
ebm-papst (Portugal), Lda.  
Centro Empresarial de Alverca  
Rua de Adarse, Vale D'Ervas  
Corpo D / Fracção 3  
2615-178 Alverca do Ribatejo  
PORTUGAL  
Phone +351 218 394 880  
Fax +351 218 394 759  
info@pt.ebmpapst.com  
www.ebmpapst.pt

 **Romania**  
ebm-papst Romania S.R.L.  
Str. Tarnavei Nr. 20  
500327 Brasov  
ROMANIA  
Phone +40 268 331859  
Fax +40 268 312805  
dudasludovic@xnet.ro

 **Russia**  
ebm-papst Ural GmbH  
Posadskaja-Strasse, 23(E), 3  
620102 Ekaterinburg  
RUSSIA  
Phone +7 343 2338000  
Fax +7 343 2337788  
Konstantin.Molokov@ru.ebmpapst.com  
www.ebmpapst.ur.ru

 **Russia**  
ebm-papst Rus GmbH  
proezd 4529, vladenie 5, stroenie 1  
141000 Mytistschi, Oblast Moskau  
RUSSIA  
Phone +7 495 9807524  
Fax +7 495 5140924  
info@ebmpapst.ru  
www.ebmpapst.ru


 **Serbia & Montenegro**  
ebm-papst Industries Kft.  
Ezred u. 2.  
1044 Budapest  
HUNGARY  
Phone +36 1 8722-190  
Fax +36 1 8722-194  
office@hu.ebmpapst.com

 **Spain**  
ebm-papst Ibérica S.L.  
Avda. del Sistema Solar, 29  
28830 San Fernando de Henares (Madrid)  
SPAIN  
Phone +34 91 6780894  
Fax +34 91 6781530  
ventas@ebmpapst.es  
www.ebmpapst.es

 **Sweden**  
ebm-papst AB  
Äggelundavägen 2  
17562 Järfälla  
SWEDEN  
Phone +46 10 4544400  
Fax +46 8 362306  
info@ebmpapst.se  
www.ebmpapst.se

 **Switzerland**  
ebm-papst AG  
Rütisbergstrasse 1  
8156 Oberhasli  
SWITZERLAND  
Phone +41 44 73220-70  
Fax +41 44 73220-77  
verkauf@ebmpapst.ch  
www.ebmpapst.ch

 **Turkey**  
Akantel Elektronik San. Tic. LTD. Sti.  
Atatürk Organize Sanayi  
Bölgesi 10007 SK. No.:6  
35620 Cigli-Izmir  
TURKEY  
Phone +90 232 3282090  
Fax +90 232 3280270  
akantel@akantel.com.tr  
www.ebmpapst.com.tr

 **Ukraine**  
ebm-papst Ukraine LLC  
Lepse Boulevard, 4, Building 21  
03067 Kiev  
UKRAINE  
Phone +38 044 2063091  
Fax +38 044 2063091  
mail@ebmpapst.ua  
www.ebmpapst.ua

 **United Kingdom**  
ebm-papst UK Ltd.  
Chelmsford Business Park  
Chelmsford Essex CM2 5EZ  
UNITED KINGDOM  
Phone +44 1245 468555  
Fax +44 1245 466336  
sales@uk.ebmpapst.com  
www.ebmpapst.co.uk

 **United Kingdom**  
ebm-papst Automotive & Drives (UK) Ltd.  
The Smithy  
Fidlers Lane  
East Ilsley, Berkshire RG20 7LG  
UNITED KINGDOM  
Phone +44 1635 2811-11  
Fax +44 1635 2811-61  
A&Dsales@uk.ebmpapst.com  
www.ebmpapst-ad.com

# ebm-papst in America and Africa

## America



### Argentina

ebm-papst de Argentina S.A.  
Hernandarias 148 Lomas del Mirador  
Pcia. de Buenos Aires (1752)  
ARGENTINA  
Phone +54 11 46576135  
Fax +54 11 46572092  
ventas@ar.ebmpapst.com  
www.ebmpapst.com.ar



### Brasil

ebm-papst Motores Ventiladores Ltda.  
Av. José Giorgi, 301 Galpões B6+B7  
Condominio Logical Center  
06707-100 Cotia - São Paulo  
BRAZIL  
Phone +55 11 4613-8700  
Fax +55 11 4777-1456  
vendas@br.ebmpapst.com  
www.ebmpapst.com.br



### Canada

ebm-papst Canada Inc.  
1800 Ironstone Manor, Unit 2  
Pickering, Ontario, L1W3J9  
CANADA  
Phone +1 905 420-3533  
Fax +1 905 420-3772  
sales@ca.ebmpapst.com  
www.ebmpapst.ca



### Mexico

ebm Industrial S. de R.L. de C.V.  
Paseo de Tamarindos 400-A-5to Piso  
Col. Bosques de las Lomas  
Mexico 05120, D.F.  
MEXICO  
Phone +52 55 3300-5144  
Fax +52 55 3300-5243  
sales@mx.ebmpapst.com  
www.ebmpapst.com.mx



## USA

ebm-papst Inc.  
P.O. Box 4009  
100 Hyde Road  
Farmington, CT 06034  
UNITED STATES  
Phone +1 860 674-1515  
Fax +1 860 674-8536  
sales@us.ebmpapst.com  
www.ebmpapst.us



ebm-papst Automotive & Drives, Inc.  
3200 Greenfield, Suite 255  
Dearborn, MI 48120  
UNITED STATES  
Phone +1 313 406-8080  
Fax +1 313 406-8081  
automotive@us.ebmpapst.com  
www.ebmpapst-automotive.us

## Africa



### South Africa

ebm-papst South Africa (Pty) Ltd.  
P.O. Box 3124  
1119 Yacht Avenue  
2040 Honeydew  
SOUTH AFRICA  
Phone +27 11 794-3434  
Fax +27 11 794-5020  
info@za.ebmpapst.com  
www.ebmpapst.co.za





# ebm-papst in Asia and Australia



## Asia

### China

   ebm-papst Ventilator (Shanghai) Co., Ltd.  
No. 418, Huajing Road  
WaiGaoQiao Free Trade Zone  
No. 2001, Yang Gao (N) Road  
200131 Shanghai  
P.R. of CHINA  
Phone +86 21 5046-0183  
Fax +86 21 5046-1119  
sales@cn.ebmpapst.com  
www.ebmpapst.com.cn

### Hong Kong

   ebm-papst Hong Kong Ltd.  
Room 17E, MG Tower  
133 Hoi Bun Road, Kwun Tong  
Hong Kong  
P.R. of CHINA  
Phone +852 2145-8678  
Fax +852 2145-7678  
info@hk.ebmpapst.com

### India

   ebm-papst India Pvt. Ltd.  
26/3, G.N.T. Road, Erukkencherry  
Chennai-600118  
INDIA  
Phone +91 44 25372556  
Fax +91 44 25371149  
sales@in.ebmpapst.com  
www.ebmpapst.in

### Indonesia

   ebm-papst Indonesia  
Representative Office  
German Centre, 4th Floor, Suite 4470  
Jl. Kapt. Subijono Dj. Bumi Serpong Damai  
15321 Tangerang  
INDONESIA  
Phone +62 21 5376250  
Fax +62 21 5388305  
salesdept@id.ebmpapst.com

### Israel

   Polak Bros. Import Agencies Ltd.  
9 Hamefalsim Street  
Kiryat Arie, Petach-Tikva 49514  
ISRAEL  
Phone +972 3 9100300  
Fax +972 3 5796679  
polak@polak.co.il  
www.polak.co.il


### Japan

   ebm-papst Japan K.K.  
12th Floor, Benex S-3 Bldg.  
3-20-8 Shinyokohama, Kohoku-ku  
222-0033 Yokohama  
JAPAN  
Phone +81 45 47057-51  
Fax +81 45 47057-52  
info@jp.ebmpapst.com  
www.ebmpapst.jp

### Korea

   ebm-papst Korea Co. Ltd.  
6F, Trutec Bldg.  
12, WorldCupbuk-ro 56-gil  
Mapo-Gu  
Seoul 121-835  
KOREA  
Phone +82 2 366213-24  
Fax +82 2 366213-26  
info@kr.ebmpapst.com  
www.ebmpapst.co.kr

### Malaysia

   ebm-papst Malaysia  
Representative Office  
Unit 12-2, Jalan USJ Sentral 3  
Persiaran Subang, Selangor Darul Ehsan  
47600 Subang Jaya  
MALAYSIA  
Phone +60 3 8024-1680  
Fax +60 3 8024-8718  
salesdept@my.ebmpapst.com

### Singapore

   ebm-papst SEA Pte. Ltd.  
No. 23 Ubi Road 4  
#06-00 Olympia Industrial Building  
Singapore 408620  
SINGAPORE  
Phone +65 65513789  
Fax +65 68428439  
salesdept@sg.ebmpapst.com

### Taiwan

   ETECO Engineering & Trading Corp.  
10F-I, No. 92, Teh-Wei Str.  
Tsow-Inn District, Kaohsiung  
TAIWAN  
Phone +886 7 557-4268  
Fax +886 7 557-2788  
eteco@ms22.hinet.net  
www.ebmpapst.com.tw

### Thailand

   ebm-papst Thailand Co., Ltd.  
99/9 Moo 2, Central Chaengwattana Tower  
14th Floor, Room 1402  
Chaengwattana Road Bangtarad, Pakkret  
11120 Nonthaburi  
THAILAND  
Phone +66 2 8353785-7  
Fax +66 2 8353788  
salesdept@th.ebmpapst.com

### United Arab Emirates

   ebm-papst Middle East FZE  
PO Box 17755  
Jebel Ali Free Zone / FZS1 / AP05  
Dubai  
UNITED ARAB EMIRATES  
Phone +971 4 88608-26  
Fax +971 4 88608-27  
info@ae.ebmpapst.com  
www.ebmpapst.ae

### Vietnam

   ebm-papst Vietnam  
Representative Office  
Room #102, 25 Nguyen Van Thu Street  
District 1  
Ho Chi Minh City  
VIETNAM  
Phone +84 8 39104099  
Fax +84 8 39103970  
linh.nguyen@vn.ebmpapst.com

## Australia

### Australia

   ebm-papst A&NZ Pty Ltd.  
10 Oxford Road  
Laverton North, Victoria, 3026  
AUSTRALIA  
Phone +61 3 9360-6400  
Fax +61 3 9360-6464  
sales@ebmpapst.com.au  
www.ebmpapst.com.au

### New Zealand

   ebm-papst A&NZ Pty Ltd.  
61 Hugo Johnston Drive, Unit H  
Penrose 1061, Auckland  
NEW ZEALAND  
PO Box 112278,  
Penrose 1642, Auckland  
Phone +64 9 525-0245  
Fax +64 9 525-0246  
sales@ebmpapst.com.au  
www.ebmpapst.com.au



# Notes









**ebm-papst**  
**Mulfingen GmbH & Co. KG**

Bachmühle 2  
74673 Mulfingen  
Germany  
Phone +49 7938 81-0  
Fax +49 7938 81-110  
info1@de.ebmpapst.com

**ebm-papst**  
**St. Georgen GmbH & Co. KG**

Hermann-Papst-Straße 1  
78112 St. Georgen  
Germany  
Phone +49 7724 81-0  
Fax +49 7724 81-1309  
info2@de.ebmpapst.com

**ebm-papst**  
**Landshut GmbH**

Hofmark-Eich-Straße 25  
84030 Landshut  
Germany  
Phone +49 871 707-0  
Fax +49 871 707-465  
info3@de.ebmpapst.com

**ebmpapst**

The engineer's choice